iN.TEC®
LIGHT

NEW
SOLUTION
TECHNOLOGY
DIFFERENT LIGHT
TRADITION

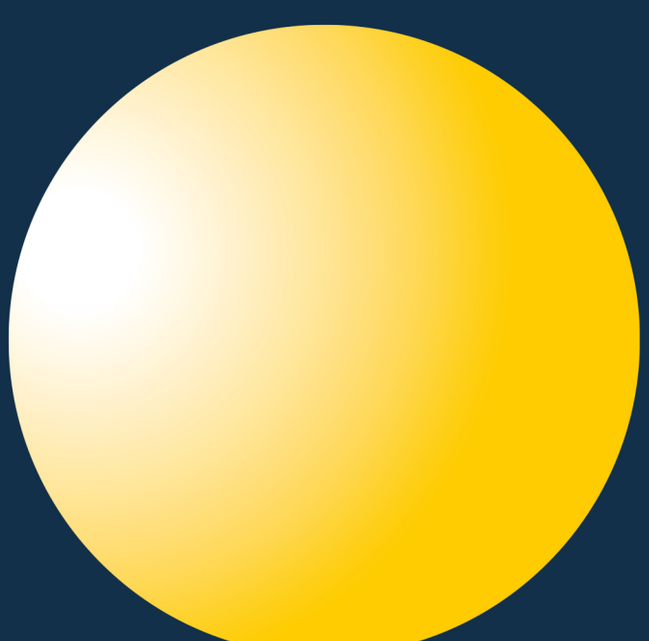

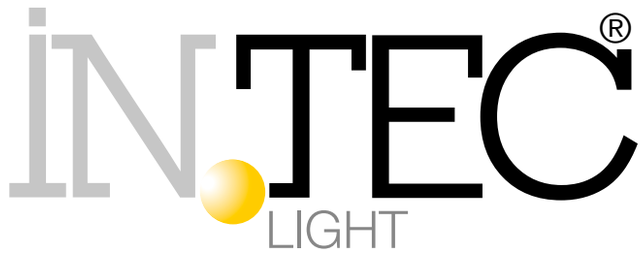
IN.TEC®
LIGHT

Un Secolo di storia e un futuro da illuminare
One century of history and a future to illuminate

La nostra storia comincia dal momento in cui l'arte del vetro entra nella nostra famiglia. Siamo agli inizi del 900' e Antonio Tammaro diventa un affermato Mastro vetraio a Napoli, creando , quelle che all'epoca, erano considerate opere d'arte.

Our story began when the art of glass entered our family. We were at the beginning of the 1900s and Antonio Tammaro became an established master glassmaker in Naples, creating what at the time were considered works of art.

Come tradizione insegna, l'arte passa di padre in figlio. Carmine, seguendo le orme del padre, continua con l'arte del vetro cristallo per tavolame, ma l'avvento dell'industrializzazione lo costringe a un cambio di rotta: lavorazione di vetro soffiato per illuminazione. Fonda così ,alla fine degli anni 50', la VE.CRI.N.

As tradition teaches, art skill passes from father to son. Carmine, following in his father's footsteps, continued with the art of crystal glass for tableware, but the advent of industrialization forces him to change course: starting the processing of blown glass for lighting. Thus, at the end of the 1950s, VE.CRI.N. was founded

Negli anni 80' nasce la vetreria Tammaro e figli. Il salto generazionale porta parte del processo produttivo alla meccanizzazione che,affiancata alla classica lavorazione del vetro, permette all'azienda di adeguare la produzione alla richiesta in tempi brevissimi (a differenza delle aziende completamente meccanizzate obbligate a produzione di massa dello stesso articolo).
Questa flessibilità permette di raggiungere clientele diversificate.

In the 80s "Vetreria Tammaro e Figli" glass factory was born. The generational leap brought part of the production process to mechanization, which, alongside the classic glass processing, allowed the company to adapt the production to the market demand in a very short time (unlike fully mechanized companies obliged to mass production of the same article). This flexibility of production did allow us to reach diversified customers.

Lo spettro della globalizzazione e il fulmineo sviluppo dei paesi extra europei instillano nella mente del giovane Franco , figlio di Carmine, l'idea di lanciare sul mercato il prodotto d'illuminazione assemblato. Nasce ,così, negli anni 90' la F.A.N. Europe lighting che , in breve tempo s'impone sul mercato proponendo articoli nei quali il vetro rimanga elemento primario.

The threat of globalization and the rapid development of extra-European countries instilled in the mind of young Franco, Carmine's son, the idea of launching the assembled lighting product on the market. Thus F.A.N. Europe Lighting was born in the 90s. In a short time, this new company imposed itself on the market by offering assembled light items in which glass remains a primary element.

Alla fine degli anni 90' , per mantenere alto il target di qualità e al contempo diversificare sempre di più la gamma dei prodotti, Franco fonda la L.V.F. , azienda che produce parti metalliche per illuminazione: alla lavorazione del vetro soffiato e centrifugato si aggiunge, con la nascita dell'azienda 2T, quella del vetro a lastra. La F.A.N. Mantiene il ruolo di assemblaggio, controllo qualità e lancio sul mercato del prodotto finito.

At the end of the 90s, to keep the quality target high and at the same time to diversify the range of products more and more, Franco founded L.V.F. , a company that manufactured metal parts for lighting. With the creation of the company 2T, production of bent glass was added to the processing of blown and centrifuged glass. In this way F.A.N. Maintained the role of assembly, quality control and launch of the finished product on the market.

Nel 2010 , periodo di crisi economica europea, i costi ormai diventati insostenibili per la gestione della produzione del vetro, unitamente a un carenza di materia prima nel paese e a un non ben delineato settore di ricerca e sviluppo delle tecnologie emergenti nel campo dell'illuminazione (LED), costringono Franco a spegnere definitivamente i forni.
Comincia così la collaborazione con aziende extraeuropee che possano realizzare sia prodotti altamente tecnologici che dal design ricercato, rispettando costantemente le linee guida e gli standard richiesti da Franco e i requisiti delle normative europee. La F.A.N. Europe lighting lancia sul mercato i marchi IN.TEC. E Luce Ambiente Design che racchiudono le esigenze tecnologiche e stilistiche per qualunque ambiente.

On 2010, a period of European economic crisis, production costs became unsustainable for the management of glass production. Furthermore, the shortage of raw materials in our country and a poorly defined sector of research and poor development of emerging technologies in the field of lighting (LED), did force Franco to permanently switch off the ovens.
Thus cooperation with non-European companies did begin and did start the possibility to create both highly technological products and refined designed products, constantly respecting the guidelines and standards required by Franco and the requirements of European norms and regulations. F.A.N. Europe Lighting launched the brands IN.TEC and Luce Ambiente Design on the market that both encompass the technological and stylistic needs for any light environment.

Oggi la FAN Europe lighting si affaccia al futuro: i fratelli Tammaro Letizia, Carmine e Davide si affiancano al padre per gestire rispettivamente amministrazione e rapporti con l'estero, ricerca - sviluppo e logistica , area commerciale e assistenza con un team affiatato di 40 persone. Alla storica sede di Nola con i suoi 15000 metri quadrati coperti su 30000 totali si aggiungerà la nuova sede a Milano studiata per ampliare i rapporti con l'Europa, migliorare ulteriormente la logistica ma sopratutto per un controllo qualità sempre più minuzioso e attento.

Nasce l'app intec, la luce diventa smart con prodotti app e voice control. Nuovi servizi di customizzazione e domotica per adattare in maniera funzionale i prodotti professionali. Luci industriali ad alti lumen e consumi green. Cataloghi in continua evoluzione per tenersi al passo con la tecnologia che avanza e nuovi design.

La tradizione continua, diventa innovativa; un nuovo concetto di luce fatto su misura per tutti gli ambienti e gli stili.

Good Light & Good Style!

Today FAN Europe lighting faces the future: the brothers Tammaro Letizia, Carmine and Davide work alongside their father to manage the administration and foreign relations, research - development and logistics, commercial area and assistance with a close-knit team of 40 people . The new headquarters in Milan, designed to expand relations with Europe, will be added to the historic site in Nola with its 15,000 square meters out of 30,000 in total, improving logistics but above all for increasingly meticulous and careful quality control.

The Intec app is born, the light becomes smart with app products and voice control. New personalization and home automation services for the functional adaptation of professional products. High lumen industrial lights and green consumption. Constantly evolving catalogues to keep up with advancing technology and new designs.

The tradition continues, it becomes innovative; a new concept of light tailored to all environments and styles.

Good Light & Good Style!

Illuminazione su misura

L'evoluzione stilistica e tecnologica dell'illuminazione focalizzata sempre più su un progetto luminoso piuttosto che sull'estetica del corpo illuminante fine a se stesso, ha indirizzato l'evoluzione illuminotecnica sempre più verso progetti di illuminazione realizzati su misura, atti a valorizzare gli ambienti architettonici, rendendo i corpi illuminanti degli strumenti discreti, al servizio del progetto architettonico, ancora protagonisti del design innovativo ma amalgamati al progetto come corpo illuminante e non più come oggetto luminoso.
Questa fase evolutiva ci ha spinto ad ampliare la divisione Project ed Illuminotecnica della nostra azienda, divisione che si dedica ai progetti su misura.
La nostra divisione Project ed Illuminotecnica esegue già servizio di progettazione , realizzazione prototipi, test e controllo produzione durante la fabbricazione di ogni prodotto presente sul nostro catalogo.
Quando i nostri prodotti non incontrano le esigenze del cliente, ci occupiamo della realizzazione di prodotti "customizzati" partendo dalla ricerca dei materiali giusti, del LED più idoneo allo spettro estetico e normativo richiesto, e dell'elettronica di controllo più adeguata. Ogni customizzazione su misura viene curata nei minimi dettagli per essere adeguata alle esigenze specifiche del progetto e per valorizzare al massimo gli ambienti del disegno illuminotecnico, in modo che ogni architettura sia messa in risalto da un efficace dialogo tra estetica e tecnica.
Grazie a strumenti informatici e software di calcolo fotometrico siamo in grado di fornire per ogni nuovo prodotto i calcoli fotometrici per un adeguato sviluppo progettuale illuminotecnico.

The stylistic and technological evolution of lighting focused more and more on a lighting project rather than on the aesthetics of the lighting body itself, has increasingly directed the evolution of lighting technology towards tailor-made lighting projects, aimed at enhancing the environments architectural, turning the lighting bodies in discreet lighting instruments, at the service of the architectural project, still protagonists of the innovative design but amalgamated with the project as a lighting body and no longer as a luminous object.
This evolutionary phase prompted us to expand the Project and Lighting Engineering division of our company, a division dedicated to tailor-made projects.
Our Project and Lighting Engineering division already carries out design, prototype, test and production control services during the manufacture of each product on our catalogue.
When our products do not meet the customer's needs, we take care of the creation of "customized" products starting from the research for the right materials, the most suitable LED for the aesthetic and regulatory spectrum required, and the most suitable control system electronics. Each custom-made customization is taken with the highest care till the smallest detail to be appropriate to the specific needs of the project and to make the best lighting design environments, so that each architecture is highlighted by an effective dialogue between aesthetics and technique.
Thanks to highly professional devices and photometric calculation software we are able to provide photometric calculations for each new product for adequate lighting design development and project calculation.

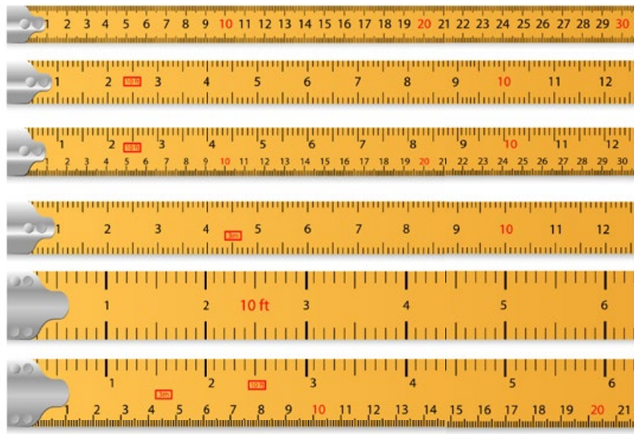

EASY DOMOTICA

Easy domotica
Easy Home Automation

Con questo segmento tecnico intendiamo soddisfare al meglio la crescente esigenza di migliorare la qualità di vita domestica, e lavorativa attraverso l'utilizzo di dispositivi di illuminazione sempre più interconnessi fra loro tramite collegamenti sempre più semplificati dalle tecnologie wireless.

I dispositivi di illuminazione diventano uno strumento estremamente personalizzato e modulabile che si fondono, anche in diversi momenti della giornata, con le evolute esigenze di illuminazione non più fine a se stessa ma adattata ai diversi umori sia di una utenza professionale che di una utenza domestica o ludica.

Questa sezione raggruppa prodotti a bassa tensione che è possibile collegare con alimentatori a tensione costante in parallelo e si caratterizzano per la estrema flessibilità e modularità essendo essi compatibili con centraline di controllo in Radio Frequenza 2,4G, Infrarossi, Wifi o Buetooth.
Le centraline a loro volta prevedono interfacce wifi, bluetooth oppure possono essere controllate tramite wall pad o radiocomandi.

With this technical segment, we intend meet in the best way the growing need to improve the quality of home and working life through the use of lighting devices that are increasingly interconnected with each other through connections that are increasingly simplified by wireless technologies.

The lighting devices become an extremely personalized and modular tool that merge, even at different times of the day, with the evolved lighting needs no longer as light source itself but light adapted to the different moods of both professional users, domestic users, playful users.

This section groups low voltage products that can be connected with constant voltage power supply in parallel connection system and are characterized by extreme flexibility and modularity as they are compatible with 2.4G Radio Frequency, Infrared, Wifi or Bluetooth control units.
The control units can be controlled by wifi, bluetooth devices or can be controlled via a wall pad or remote control

SMART INTEC Wi-Fi

App Intec

DOWNLOAD ON
Download on the App Store
GET IT ON Google Play

Good solution for your Smart life!

Ogni momento della vita quotidiana richiede la giusta luce.
Grazie all'illuminazione Smart, creare l'atmosfera ideale per tutti i momenti sarà possibile con i nostri prodotti Wi-fi e Bluetooth.
Tramite la nostra app Smart INTEC è possibile comandare da remoto tutti gli apparecchi luminosi per accendere o spegnere, cambiare temperatura colore Kelvin della luce e anche impostare scene.
Tra i nostri articoli troverai una selezione di prodotti a LED integrato pronti all'installazione ma anche tutti gli accessori necessari per rendere smart qualunque apparecchio domestico e non. Una volta collegata e scaricata l'app INTEC, la creazione delle varie stanze sarà semplice e intuitivo grazie alle istruzioni step by step.
Per controllare i nostri prodotti smart è possibile anche utilizzare gli smart speaker e video Amazon e Google. Abilita la skill e controlla i dispositivi semplicemente parlando.

Every moment of everyday life require the right light.
Thank to the Smart lighting it will be possible to create the ideal atmosphere connecting them and controlling them thorough Wi-fi or Bluetooth connection.
With our APP Smart Intec it is possible to control from remote all the lighting devices with on-off, kelvin colour temperature changing, light colour and scenes functions.

Powered by tuya Intelligence Inside

To instore some smart lamps it is necessary just your standard home electric connection, and wifi connection.
Once connected the lamp and downloaded the APP Smart Intec it will be very easy to create groups and rooms in very easy process thank to the instructions step by step on the App.
The smart lamps can be controlled also with Wifi voice control devices.

SMART INTEC Bluetooth Sig mesh



La rete Bluetooth è stata ben accolta nell'illuminazione industriale, commerciale e domestica, in quanto uno dei sistemi di controllo dell'illuminazione intelligente più semplici e convenienti che svolge un ruolo chiave nel facilitare l'inter-dialogo tra i dispositivi di illuminazione. I nostri articoli Bluetooth Sig Mesh possono essere collegati con i dispositivi intelligenti tramite l'APP Smart Intec e ogni dispositivo di illuminazione può comunicare con un altro numero infinito di dispositivi attraverso la rete mesh entro una distanza di 15m per ogni dispositivo.
La rete Mesh Bluetooth può essere controllata da remoto tramite Wifi grazie alla connessione del gateway Bluetooth il quale a sua volta può connettersi ai dispositivi voice control Alexa e Google.
Per tutti gli utenti, i prodotti mesh Bluetooth sono anche comodi da usare. Abilitata da una rete di dispositivi su larga scala e in grado di sfruttare il basso consumo energetico, una rete mesh Bluetooth può supportare migliaia di dispositivi che lavorano contemporaneamente. Quindi, non importa se sei a casa o in ufficio, puoi sempre eseguire un gran numero di dispositivi intelligenti connessi allo stesso tempo. Di conseguenza, i prodotti Bluetooth mesh smart forniscono una gamma completa di comodità per vivere e lavorare senza preoccuparsi degli alti costi energetici. Nella casa intelligente, il Bluetooth abbassa la soglia di utilizzo dei dispositivi domestici intelligenti con il suo basso consumo energetico, l'elevata compatibilità e le caratteristiche di alta sicurezza, fornendo un'esperienza domestica più economica, più user-friendly e più intelligente. Senza l'autorizzazione dell'utente, il segnale Bluetooth non sarà in grado di connettersi e tracciare il dispositivo, proteggendo la privacy dell'utente.

Bluetooth mesh has been well received across the industrial, commercial and domestic lighting, as one of the easiest and much convenient smart lighting control systems playing a key role in facilitating the inter-dialogue between lighting devices.
Our Bluetooth mesh items can be connected with the smart devices through the APP Smart Intec and each lighting device can communicate with other infinite number of devices through the mesh network with all other devices within a distance of 15m.
The Bluetooth mesh network can be controlled from remote area through Wifi thank to the connection of Bluetooth gateway that can connect in turn to Alexa and Google voice controls.
For individual users, Bluetooth mesh products are also convenient to use. Enabled by a large-scale device network and able to take advantage of low power consumption, a Bluetooth mesh network can support thousands of devices working simultaneously. So, no matter if you are at home or in the office, you can always run a large number of connected smart devices at the same time. As a result, Bluetooth mesh smart products provide a full range of conveniences for living and working without worrying about high energy costs.
In the smart home, Bluetooth lowers the threshold of using smart home devices with its low power consumption, high compatibility, and high-security characteristics, providing a lower cost, more user-friendly, and smarter home experience. Without the user's permission, the Bluetooth signal will not be able to connect and track any device, protecting the user's privacy.

Guida alla lettura del catalogo
Catalogue reading guide



Destinazione d'uso / *Intended use*

Ogni collezione sarà accompagnata da uno o più simboli per precisare la destinazione d'uso del prodotto
Every collection will be distinguished by a symbol for intended use

uso domestico *domestic use*
esterno *outdoor use*
aree urbane *urban use*
uffici *office use*
strutture ricettive *accommodation areas use*
aree industriali *industrial use*
ambiente bagno *bathroom use*
aree commerciali *commercial areas*

Legenda simboli / *Legend of symbols*

LED integrato SMD
Built-in SMD LED

LED integrato COB
Built-in COB LED

Direzione fascio di luce
Description of light emission type

luce calda warm white
luce naturale natural white
luce fredda cool white
Temperatura colore LED espressa in Kelvin (K)
Colour temperature in Kelvin

Prodotto CCT
(bianco dinamico)
Adjustable white

Prodotto RGB
RGB product

Dimming
Intesità di luce regolabile
Dimmable light intensity

3 step Dimmer
<3s
<3s
x1-100%
x2-50%
x3-10%
I prodotti 3 step dimmer permettono di regolare l'intensità luminosa utilizzando l'interrutore di casa.
3 step dimming function: modulation of light intensity by wall switch

Indice resa cromatica
Colour rendering index

Prodotto non dimmerabile
Product not dimmable

Attacco sorgente
E27 Light source

Attacco sorgente
E14 Light source

Attacco sorgente
GU10 Light source

Attacco sorgente
MR16 Light source

Attacco sorgente
R7S Light source

Attacco sorgente
LED T8 Light source

ø 34
H 49
Lampadina mis.
Bulb size

*ove esistenti
**Where existing*

**ove esistenti
***where existing*

***per i prodotti senza LED integrato, dati attacco lampadina con potenza massima certificata
****for the products without built-in LED max lamp holder power as required by CE certificate*

Caratteristiche prodotto / *Product features*

Sistema trifase
Threephase system

Calpestabile
Walkable

Gesso Verniciabile
Gypsun paintable

Cemento
Concrete

Prodotto ad energia solare
solar energy product

Luce emergenza
Emergency light

Prodotto ad alta efficienza luminosa
High Luminous Efficiency product

dimensione foro quadrato per incasso a soffitto
Square cut-out size for ceiling recessed lamps
100X100

dimensione foro rotondo per incasso a soffitto
Round cut-out size for ceiling recessed lamps
ø 80

dimensione foro quadrato per incasso a parete
Square cut-out size for wall recessed lamps
92x55x31

dimensione foro rotondo per incasso a parete
Round cut-out size for wall recessed lamps
ø 80

UGR<19
Prodotto UGR
unified glare rating

Sistema di illuminazione UGR

UGR è un indice unificato in campo internazionale, sviluppato dalla CIE (commission international de l'Enclairage), per la valutazione dell'abbagliamento diretto derivante dall'impianto di illuminazione. La norma europea per l'illuminazione dei posti di lavoro in interni **UNI-EN 12464-1** richiede un valore UGR specifico per ogni applicazione, compreso tra **10** e **30: più basso è il valore, minore è l'abbagliamento**

Unified glare rating

UGR is an international unified data, developped by CIE (commission international de l'Enclairage) for the avaluation of the glaning degree of the light sources. The European norme for the lighting of te specifical working place **UNI-EN 12464-1** *requires a value UGR for every application, included between 10 and 30: lower is the value, lower is the anti glare ratee.*

Gradi di protezione
IP Protection rate

CLASSE IP - *IP CLASS*



Tutti i prodotti presenti nel catalogo senza specifica grado IP si intendono **IP20**
*All items in the catalogue without IP rating specific are **IP20***



Potezione da corpi solidi
Protection against solid bodies

0	Nessuna protezione *No protection*
1	Protetto contro corpi solidi di dimensioni superiori a 50 mm *Protected against solid bodies larger than 50mm*
2	Protetto contro corpi solidi di dimensioni superiori a 12 mm *Protected against solid bodies larger than 12 mm*
3	Protetto contro corpi solidi di dimensioni superiori a 2,5 mm *Protected against solid bodies larger than 2,5 mm*
4	Protetto contro corpi solidi di dimensioni superiori a 1 mm *Protected against solid bodies larger than 1 mm*
5	Protetto dalla polvere senza deposito dannoso *Protected against dust no harmful deposit*
6	Completamente protetto dalla polvere *Completely protected against dust*



Potezione da liquidi
Protection against liquids

0	Nessuna protezione - *No protection*
1	Protetto contro le gocce d'acqua a caduta verticale *Protected against vertically-falling drops of water*
2	Protetto contro le gocce d'acqua che cadono fino a 15 ° dalla verticale *Protected against drops of water falling at up to 15° from the vertical*
3	Protetto contro le gocce d'acqua che cadono fino a 60° dalla verticale *Protected against drops of water falling at up to 60° from the vertical*
4	Protetto contro le gocce d'acqua da tutte le direzioni *Protected against projections of water from all directions*
5	Protetto da getti d'acqua da tutte le direzioni *Protected against jets of water from all directions*
6	Protetto da getti d'acqua con una forte forza d'impatto *Protected against jets of water of similar force heavy seas*
7	Protetto dagli effetti dell' immersione *Protected against the effects of immersion*
8	Protetto contro gli effetti prolungati dell'immersione sotto pressione *Protected against pro-longed the effects of immersion under pressure*

CLASSE IK - *IK CLASS*

Gradi di protezione degli involucri per apparecchiature elettriche contro impatti meccanici esterni
Degrees of protection for enclosures for electrical equipment against external mechanical impacts

IK	Energia d'impatto (in Joules) *Impact energy (in Joules)*
00	0
01	0,15
02	0,2
03	0,35
04	0,5
05	0,7
06	1
07	2
08	5
09	10
10	20

CLASSE ISOLAMENTO ELETTRICO - *APPLIANCE CLASS*

Le classi di isolamento elettrico sono il raggruppamento omogeneo definito dall'IEC (International Electrotechnical Commission) delle caratteristiche tecniche applicabili ad un dispositivo elettrico per limitare i rischi di folgorazione conseguenti ad un guasto dello stesso.

The electrical insulation classes are the homogeneous grouping defined by the IEC (International Electrotechnical Commission) of the technical characteristics applicable to an electrical device to limit the risk of electrocution resulting from its failure.

I		Questi apparecchi devono avere il telaio collegato alla terra elettrica da un conduttore di terra separato *These appliance must have their chassis connected to electrical earth by a separate earth conductor*
II		Questi apparecchi sono progettati in modo da non richiedere la connessione delle messe a terra *These appliance are designed in such a way that it does not require a safety connection to electrical earth*
III		Questi apparecchi sono progettati per essere alimentati da una fonte di alimentazione a bassissima tensione separata / di sicurezza *These appliance are designed to be supplied from a separated/safety extra-low voltage power source*

CERTIFICAZIONE E NORMATIVE - *NORMS AND CERTIFICATIONS*

Tutti i nostri prodotti sono certificati e conformi alle normative vigenti nella comunità Europea.
All our products comply with CE norms and current European standards

CE

Indice per categorie
Index by category

SISTEMA BINARI / TRACK LIGHT 26

INCASSI / RECESSED LAMP 78

SISTEMI D'ILLUMINAZIONE MULTIFUNZIONE / MULTI-FUNCTION LIGHTING SYSTEM 168

APPLIQUE E PLAFONIERE/ WALL LAMP AND CEILING LAMP 190

SPOT E FARETTI/ SPOT LIGHT 296

SOTTOPENSILI E BARRE LED / CABINET AND LEDBAR 314

PROFILI E STRIP LED / PROFILE AND STRIP LED 340

LAMPADE D'EMERGENZA / *EMERGENCY LAMP* 388

APPLIQUE PER ESTERNI / *OUTDOOR WALL LAMP* 396

PLAFONIERE PER ESTERNI / *OUTDOOR CEILING LAMP* 468

APPLIQUE SOSPENSIONI E PALETTI CORRELATI / WALL SOSPENSION AND FLOOR LAMP COMBINED 494

INCASSI E SEGNAPASSI PER ESTERNI / OUTDOOR INGROUND AND WALK LIGHT 576

SOLARI / *SOLAR LAMP* 608

PROIETTORI / *FLOOD LIGHT* 624

STRADALI / *STREET LIGHT* 656

HIGH BAY E TRI-PROOF / *HIGH BAY AND TRI-PROOF* 666

DECO LIGHT 24V 677

LUCI DECORATIVE TECNICHE / *TECHNICAL DECORATION LIGHTING* 684

COMPONENTISTICA / LIGHTING COMPONENTS 702

SISTEMA BINARI / *TRACK LIGHT*


Tema
pag. 36 - 37


Line
pag. 38 - 39


Slide
pag. 40

Tubo
pag. 41


Track Davinci
pag. 42 - 45


Maxwell
pag. 46 - 47


Kone BT
pag. 48 - 49


Kone food
pag. 50 - 51


Kone
pag. 52 - 53


Action
pag. 54 - 55


Rocket
pag. 56


Rocket ap
pag. 57


Oboe
pag. 58


Clock
pag. 59


Squib
pag. 60 - 61


Express
pag. 61


Help track
pag. 62


Track
pag. 64 - 69


Busbar
pag. 70 - 75

INCASSI


Apollo
pag. 78 - 79


Outsider
pag. 80 - 81


Delta
pag. 82


Delta food
pag. 83


Lybra
pag. 84


Fibra ottica
pag. 85


Starlight
pag. 86 - 87


Asso kit
pag. 88 - 89


Asso
pag. 90 - 91


Dama
pag. 92 - 93


Sinkro
pag. 94 - 95


Elite
pag. 96 - 97


Lander
pag. 98 - 99


Xanto R
pag. 100 - 101


Xanto int
pag. 102


Xanto Q
pag. 104 - 105


Mack
pag. 106 - 107


Tron
pag. 108 - 109


Blink - Eyes
pag. 110


Slim int
pag. 111


Slim
pag. 112 - 113

Flap
pag. 114 - 115

Plus
pag. 116 - 117

Mizar
pag. 118 - 119

Plasma
pag. 120

Polaris
pag. 121

Gemini
pag. 122

Orione
pag. 123

Blitz
pag. 124 - 125

Fusion
pag. 126

Fusion kit
pag. 127

Nemo
pag. 128

Rainbow
pag. 129

Nadir
pag. 130

Zenit
pag. 131

Horus
pag. 132 - 133

Matrix F3
pag. 134

Matrix M3
pag. 135

Matrix M1
pag. 136

Starry
pag. 137

Tubex
pag. 138 - 139

Vulkan
pag. 140

Entity
pag. 141

Goblet
pag. 142

Shadow
pag. 143

Phantom
pag. 144

Spettro
pag. 145

Mini
pag. 146

Spirit
pag. 147

Ghost
pag. 148

Snow
pag. 149

Morgana
pag. 150

Senso
pag. 151

Brick
pag. 152

Hive
pag. 153

Skilift
pag. 154 - 155

Eva
pag. 156 - 157

Ariel
pag. 158 - 159

Anima
pag. 160

Viper
pag. 161

Ayris Q
pag. 162

Ayris R
pag. 163

Stenos Q
pag. 164

Stenos R
pag. 165

Reflex SF
pag. 166

Reflex SM
pag. 167

INDOOR

SISTEMI D'ILLUMINAZIONE MULTIFUNZIONE / MULTI-FUNCTION LIGHTING SYSTEM

Segmento
pag. 168 - 169

Metro
pag. 170

Euclid
pag. 171

Build
pag. 172 - 173

Panel BK
pag. 174

Panel 5Y
pag. 175

Panel
pag. 176 - 177

Panel UGR
pag. 178

Panel IP65
pag. 179

Panel SENS
pag. 180

Panel Dim
pag. 181

Panel RGBW
pag. 182

Panel CCT
pag. 183

Panel BIS
pag. 184 - 185

Panel struttura
pag. 186

Panel accessori
pag. 187

Panel DJ
pag. 188-189

APPLIQUE E PLAFONIERE/ WALL LAMP AND CEILING LAMP

Klio Q
pag. 190 - 191

Klio R
pag. 192 - 193

Mig
pag. 194

Genesis
pag. 195

Town
pag. 196 - 197

Xico
pag. 198 - 199

Vortex
pag. 200 - 201

Space S
pag. 202

Space
pag. 203

Banjie
pag. 204 - 207

Foster
pag. 208 - 211

Hapis
pag. 212 - 213

Living
pag. 214 - 215

Gabriel
pag. 216 - 217

Rock
pag. 218 - 219

Ortisei
pag. 220 - 221

Mood
pag. 222

Soul
pag. 223

Leiron
pag. 224

Montblanc
pag. 225

Shine
pag. 226

Astron
pag. 227

Cervinia
pag. 228

Scott
pag. 229

Rubik
pag. 230 -231

Moses
pag. 232 - 233

Piroette
pag. 234 - 235

Cortina
pag. 236 - 237

Candida
pag. 238 - 239

Gatsby
pag. 240

Stone
pag. 241

Santorini
pag. 242

Mykonos
pag. 243

Abel
pag. 244

Sestriere
pag. 245

Moritz verniciabili
pag. 246 - 247

Moritz
pag. 248 - 249

Livigno
pag. 250 - 251

Alma
pag. 252 - 253

Aileron
pag. 254 - 255

Sigma
pag. 256

Andromeda
pag. 256

Atlas
pag. 257

Omega
pag. 257

Lambda
pag. 258

Alcor
pag. 259

Grado
pag. 260

Kite
pag. 261

Mustang
pag. 262 - 263

Twilight
pag. 264

Omnia
pag. 265

Grecale
pag. 266 - 267

Levante
pag. 268

Scirocco
pag. 269

Borea
pag. 272

Skyron
pag. 273

Aliseo
pag. 274

Foehn
pag. 275

Moon
pag. 276 - 277

Moon INT
pag. 278 - 279

Domo
pag. 280 - 281

Blaster
pag. 282 - 283

Lancer
pag. 284 - 285

Sacs
pag. 286

Riva
pag. 287

Cruise
pag. 287

Aqa
pag. 288 - 289

Scarab
pag. 290

Wally
pag. 290

Endy
pag. 291

Joy
pag. 245

Roby
pag. 292 - 293

Dado
pag. 294

Gaia
pag. 294

F1
pag. 295

Q1
pag. 295

SPOT E FARETTI/ SPOT LIGHT


Zero
pag. 296 - 297


Punto
pag. 298 - 299


Techno
pag. 300 - 301


Techno nik
pag. 302 - 303


Sunny
pag. 304 - 305


Miami
pag. 306 - 307


Cooper
pag. 308 - 309


Cadillac
pag. 310


Mito
pag. 311


Carrera
pag. 312


Doubleu
pag. 313

SOTTOPENSILI E BARRE LED / CABINET AND LEDBAR


Unix
pag. 314 - 317


Unix ang
pag. 318 - 319


T8
pag. 320 - 321


Batten
pag. 322 - 323


Habilis
pag. 324 - 325


T5
pag. 326 - 327


Movie
pag. 328 - 329


Line
pag. 330 - 331


Zak
pag. 332 - 333


Aurika
pag. 334


Blam
pag. 334

Gto
pag. 335


Closet
pag. 336


Shelf
pag. 336


Trigger
pag. 337


Sonar
pag. 338


Young
pag. 338


Vista
pag. 339

PROFILI E STRIP LED / PROFILE AND STRIP LED


Profili strip
pag. 340 - 351


Sensori strip
pag. 351


Profili gesso
pag. 352 - 353


Strip24V cob 480
pag. 354


Strip24V cob IP67 480
pag. 355


Strip CC30
pag. 356


Strip24V 2835 3D 60
pag. 357


Strip24V 2835 60
pag. 358


STRIP24V 2835IP67 60
pag. 359


Strip24V slim 120
pag. 360


Strip24V 2835 120
pag. 361

Strip24V 2835IP68 120
pag. 362

Strip24V 2835 CCT
pag. 363

Strip24V 2835 240
pag. 364

Strip24V 5050 60
pag. 365

Strip24V 5050 IP67 60
pag. 366

Stripled CC15 rgb
pag. 367

Strip24V 5050 RGB
pag. 368

Strip24V 5050 RGB IP67
pag. 369

Strip24V 5050 RGBW
pag. 370

Strip24V 5050 RGBW IP68
pag. 371

Strip24V 5050 3D rgbw
pag. 372

Strip24V 5050 RGBCCT
pag. 374

Strip24V 3838 168 RGB
pag. 375

Strip24V 5050RGBW INT
pag. 376

Strip24V 2835 INT
pag. 377

Strip24V 2835 KIT
pag. 378

Strip24V 5050 RGB KIT
pag. 379

Neon Flex
pag. 380

Insign
pag. 382

Insign RGBW
pag. 383

Insign F
pag. 383

Taylor
pag. 384

Strip surround
pag. 385

Strip surround 2M
pag. 386 - 387

LAMPADE D'EMERGENZA / EMERGENCY LAMP

Eterna
pag. 388 - 389

Help inc
pag. 390

Help track
pag. 391

Help exit
pag. 392

Bolt Help
pag. 393

Help 503
pag. 394

Help 511
pag. 395

APPLIQUE PER ESTERNI / OUTDOOR WALL LAMP

Compass
pag. 396 - 397

Compact
pag. 398

Detroit
pag. 399

Amon
pag. 400 - 401

Stealth
pag. 402 - 403

Mercury
pag. 404

Gamma
pag. 405

Miura
pag. 406

Tunnel
pag. 407

Veyron
pag. 408 - 409

Biome
pag. 410 - 411

Golf
pag. 412 - 413

Ray
pag. 414 - 415

Twin
pag. 416 - 417

Border
pag. 418 - 419

Luxon
pag. 420 - 421

Agera
pag. 422 - 423

Dezir
pag. 424

Zonda
pag. 425

Boxter
pag. 426 - 427

Beetle
pag. 428 - 429

Ribbon
pag. 430 - 431

Laser
pag. 432 - 433

Alfa
pag. 434 - 437

Delta
pag. 438 - 439

Beta
pag. 440

Ghibli
pag. 441

Parker gr
pag. 442 - 443

Parker bco
pag. 444 - 445

Portland
pag. 447

Oakland
pag. 447

Jump
pag. 448 - 449

One
pag. 450 - 451

Qubo
pag. 452 - 453

Tucson
pag. 454 - 455

Huracan
pag. 456

Seattle
pag. 457

Austin
pag. 458 - 459

Boston
pag. 460

Memphis
pag. 460

Atlanta
pag. 461

Denver
pag. 461

Mondrian
pag. 462

Gaeta
pag. 463

Grubb
pag. 464

Akron
pag. 465

Togo
pag. 466 - 467

PLAFONIERE PER ESTERNI / OUTDOOR CEILING LAMP

Zoom
pag. 468 - 469

Tutor
pag. 470 - 471

Vertigo
pag. 472 - 473

Citizen
pag. 474 - 475

Capri
pag. 476

Ischia
pag. 477

Sensitive
pag. 479

Extra
pag. 480

Shelly Q
pag. 481

Shelly Q MW
pag. 482

Shelly
pag. 483

Ever Q
pag. 485

Ever
pag. 486

Ever XL
pag. 487

Ever XL MW
pag. 488

Ever LP, XLP
pag. 489

Picnic int
pag. 491

Picnic solar
pag. 492

Picnic solar
pag. 492

Picnic
pag. 493

APPLIQUE SOSPENSIONI E PALETTI CORRELATI / WALL SOSPENSION AND FLOOR LAMP COMBINED


Wizard
pag. 494 - 495


Discovery
pag. 496 - 497


Idem
pag. 498 - 499


Reverse
pag. 500 - 501


Sintesi
pag. 502


Alyson
pag. 503


Bitt
pag. 504 - 505


Nismo
pag. 506


Station
pag. 507


Underwood
pag. 508 - 509

Tokyo
pag. 510 - 511


Drop
pag. 512 - 513


Etna
pag. 514 - 515


Masai
pag. 516


Perret
pag. 517


Drink
pag. 518


Jammin
pag. 520


Cocktail
pag. 522


Climax
pag. 524


Oberon
pag. 526


Geco Dj
pag. 529

Geco LED
pag. 530 - 531

Geco E27
pag. 532 - 537


Geco solar
pag. 538 - 539


Mandala
pag. 540 - 541


York
pag. 542 - 543


Skittle
pag. 544 - 545


Orbit
pag. 546 - 547


Mirage
pag. 548 - 549


Prisma
pag. 550 - 551


Lady
pag. 552 - 553


Cloe
pag. 554 - 555


Megan
pag. 556 - 557


Roma
pag. 558 - 559


Milano
pag. 560 - 561


Roma/Milano
pag. 562 - 563


Pisa
pag. 564 - 565


Firenze
pag. 566 - 567


Santiago
pag. 568 - 569


Venezia
pag. 570 - 571

Pavia
pag. 572 - 573

Brightmax
pag. 574 - 575

INCASSI E SEGNAPASSI PER ESTERNI / OUTDOOR INGROUND AND WALK LIGHT

Barret
pag. 576

Subway
pag. 577

Rider dir
pag. 578

Rider
pag. 579

Rider RGB
pag. 580

Impact
pag. 581

Step24V R4
pag. 582

Step24V R1
pag. 583

Walk
pag. 584 - 586

Hummer
pag. 587

Drive
pag. 588 - 589

Elmo
pag. 590 - 591

Onyx
pag. 592 - 593

Lykan
pag. 594

Bolt
pag. 595

Slab
pag. 596

Breen
pag. 597

Smile
pag. 598 - 599

Bolt
pag. 600 - 601

Bolt sens
pag. 602

Bolt cct
pag. 603

Steplight
pag. 604 - 605

Shelby
pag. 606 - 607

SOLARI / SOLAR LAMP

kyoto
pag. 608

Enya
pag. 609

Ted
pag. 610

Albert
pag. 611

Cosmo S
pag. 612

Cosmo FV
pag. 613

Elios
pag. 614

Eos
pag. 615

Open
pag. 616

Skyp
pag. 617

Argo
pag. 618

Shiva
pag. 620

Ulysse
pag. 621

Athos solar
pag. 622 - 623

PROIETTORI / FLOOD LIGHT

Vysor
pag. 624 - 625

Banner
pag. 626 - 627

Sat
pag. 628 - 629

Kronos
pag. 630 - 631

Elios
pag. 632 - 633

Elios sens
pag. 634

Elios P
pag. 635

Athos
pag. 636 - 637

Plutone
pag. 638 - 639

Plutone sens
pag. 640

Plutone P
pag. 641

Harald
pag. 642 - 643

Taurus
pag. 644 - 645

Accessori proiettori
pag. 646 - 647

Giove
pag. 648 - 649

Zeus
pag. 650 - 651

Master
pag. 652 - 653

Energy
pag. 654 - 655

STRADALI / STREET LIGHT

Invictus
pag. 656 - 657

Iperion
pag. 658

Febo
pag. 659

Streetway
pag. 660 - 661

Highway
pag. 662 - 663

Polis
pag. 664 - 665

INDUSTRIAL

HIGH BAY E TRI-PROOF / HIGH BAY AND TRI-PROOF

Stargate XP
pag. 666 - 667

Sensori industriali
pag. 668

Atlantic
pag. 669

Nautilus
pag. 670 - 671

Artic
pag. 672

Ocean
pag. 673

Concorde
pag. 674

Superia
pag. 675



Xanto RF
pag. 677



Panel 24V
pag. 678



Strip24V 5050 RGBW
pag. 679



Strip24V 5050 RGBW IP68
pag. 680



Target
pag. 681



Sprint
pag. 682



Runner
pag. 683



Driver accessori
pag. 702



Driver
pag. 703 - 709



Alimentatori
pag. 704 - 706



Driver
pag. 707 - 709



Controller
pag. 710 - 711



Ricevitori
pag. 712



Amplificatori
pag. 713



Clay
pag. 714 - 715



Porta lampade
pag. 716 - 717



Adattatori
pag. 718 - 719



Power
pag. 720



Smart hub
pag. 721



Rays
pag. 684 - 685



Wallwasher
pag. 686 - 687



Iride
pag. 688 - 689



Iride inc
pag. 690 - 691



Neptune
pag. 692



Crown
pag. 693



Trevis
pag. 694 - 695



Par 56
pag. 696



Pelps
pag. 697



Controller
pag. 698 - 701



Splitter
pag. 699



Sunlite
pag. 700 - 701

SMART INTEC
Wi-Fi



Xanto int
pag. 102

Slim int
pag. 111



Grecale
pag. 266 - 267



Levante
pag. 268



Scirocco
pag. 269



Borea
pag. 272



Skyron
pag. 273



Aliseo
pag. 274



Foehn
pag. 275

Moon INT
pag. 278 - 279

Compass
pag. 394 - 395

Zoom
pag. 466 - 467

Tutor
pag. 468 - 469

Wizard
pag. 492 - 493

Discovery
pag. 494 - 495

SMART INTEC
Bluetooth
Sig mesh

Kone BT
pag. 48 - 49

Blink - Eyes
pag. 110

Harald
pag. 642 - 643

INDICE ALFABETICO
ALPHABETICAL INDEX

Articolo	Pagina
Abel	244
Accessori easy domotica	666
Accessori proiettori	636-637
Action	54-55
Adattatori	708-709
Agera	422-423
Aileron	254-255
Akron	465
Akron	465
Albert	601
Alcor	259
Alfa	434-437
Aliseo	274
Alma	252-253
Alyson	503
Amon	400-401
Andromeda	256
Anima	160
Apollo	78-79
Aqa	288-289
Argo	608
Ariel	158-159
Artic	662
Asso	90-91
Asso kit	88-89
Astron	227
Athos	626-627
Athos solar	612-613
Atlanta	461
Atlantic	659
Atlas	257
Aurika	334
Austin	458-459
Ayris q	162
Ayris r	163
Banjie	204-207
Banner	616-617

Articolo	Pagina
Barret	566
Batten	322-323
Beetle	428-429
Beta	440
Binari e accessori davinci	42-45
Binari e accessori track	63-69
Biome	410-411
Bitt	504-505
Blam	334
Blaster	282-283
Blink - eyes	110
Blitz	124-125
Bolt	585
Bolt 503 - 506	590-591
Bolt help	393
Bolt sens	592
Border	418-419
Borea	272
Boston	460
Boxter	426-427
Breen	587
Brick	152
Brightmax	564-565
Build	172-173
Busbar	70-75
Cadillac	310
Candida	238-239
Capri	476
Carrera	312
Cervinia	228
Citizen	474-475
Clay	704-705
Climax	524-525
Clock	59
Cloe	544-545
Closet	336
Cocktail	522-523

Articolo	Pagina
Compact	398
Compass	396-397
Concorde	664
Controller pool	688-691
Controller wi-fi	700-701
Cooper	308-309
Cortina	236-237
Cosmo fv	603
Cosmo s	602
Crown	683
Cruise	287
Dado	294
Dama	92-93
Delta	438-439
Delta inc	82-83
Denver	461
Detroit	399
Dezir	424
Discovery	496-497
Domo	280-281
Double u	313
Drink	518-519
Drive	578-579
Driver	692
Drop	512-513
Elios	622-623
Elios p	625
Elios sens	624
Elios solar	604
Elite	96-97
Elmo	580-581
Endy	291
Energy	644-645
Entity	141
Enya	599
Eos	605
Eterna	388-389

Articolo	Pagina
Etna	514-515
Euclid	171
Eva	156-157
Ever q	485
Ever r	486
Ever xl	487
Ever xl mw	488
Ever xlp	489
Express	62
Extra	480
F1	295
Febo	649
Fibra ottica	85
Firenze	556-557
Flap	114-115
Foehn	275
Foster	208-211
Fusion	126
Fusion kit	127
Gabriel	216-217
Gaeta	463
Gaia	294
Gatsby	240
Geco dj	518
Geco e27	522-527
Geco led	520-521
Geco solar	528-529
Gemini	122
Genesis	195
Ghibli	441
Ghost	148
Giove	638-639
Goblet	142
Golf	412-413
Grado	260
Grecale	266-267
Grubb	464

Articolo	Pagina
Gto	335
Habilis	324-325
Hapis	212-213
Harald	632-633
Help 503	394
Help 511	395
Help exit	392
Help inc	390
Help track	391
Highway	652-653
Hive	153
Horus	132-133
Hummer	577
Huracan	456
Idea	498-499
Impact	571
Insign lens	382
Insign rgbw + f	383
Invictus	646-647
Iperion	648
Iride	678-679
Iride inc	680-681
Ischia	477
Jammin	520
Joy	245
Jump	448-449
Kite	261
Klio q	190-191
Klio r	192-193
Kone	52-53
Kone bt	48-49
Kone food	50-51
Kronos	620-621
Kyoto	598
Lady	542-543
Lambda	258
Lancer	284-285

INDICE ALFABETICO
ALPHABETICAL INDEX

Articolo	Pagina
Lander	98-99
Laser	432-433
Leiron	224
Levante	268
Line	330-331
Line davinci	38-39
Livigno	250-251
Living	214-215
Luxon	420-421
Lybra	84
Lykan	584
Mack	106-107
Mandala	530-531
Masai	516
Master	642-643
Matrix f3	134
Matrix m1	136
Matrix m3	135
Maxwell	46-47
Megan	546-547
Memphis	460
Mercury	404
Metro	170
Miami	306-307
Mig	194
Milano	550-551
Mini	146
Mirage	538-539
Mito	311
Miura	406
Mizar	118-119
Mondrian	462
Montblanc	225
Mood	222
Moon	276-277
Moon int	278-279
Morgana	150
Moritz	246
Moses	232-233
Movie	328-329
Mustang	262-263
Mykonos	243
Nadir	130
Nautilus	660-661
Nemo	128
Neon flex	380
Neptune	682
Nismo	506
Oakland	447
Oberon	526-527
Oboe	58
Ocean	663
Omega	257
Omnia	265
One	450-451
Onyx	582-583
Open	606
Orbit	536-537
Orione	123
Ortisei	220-221
Outsider	80-81
Panel	176-177
Panel struttura	186
Panel 24v	668
Panel 5y	175
Panel accessori	187
Panel bis	184-185
Panel bk	174
Panel cct	183
Panel dimm	181
Panel dj	156
Panel ip65	179
Panel rgbw	182
Panel sens	180
Panel ugr	178
Par 56	686
Parker bco	444-445
Parker gr	442-443
Pavia	562-563
Pelps	687
Perret	517
Phantom	144
Picnic	493
Picnic int	491
Picnic solar	492
Piroette	234-235
Pisa	554-555
Plus	116-117
Plutone	628-629
Plutone p	631
Plutone sens	630
Polaris	121
Polis	654-655
Portalampade	706-707
Portland	447
Power	710
Prisma	540-541
Profili gesso	352-353
Profili strip	340-350
Punto	298-299
Q1	295
Qubo	452-453
Rainbow	129
Ray	414-415
Rays	674-675
Reflex sf	166
Reflex sm	167
Reverse	500-501
Ribbon	430-431
Rider	569
Rider dir	568
Rider rgb	570
Riva	287
Roby	292-293
Rock	218-219
Rocket	56
Rocket ap	57
Roma	548-549
Rubik	230-231
Runner	673
Sacs	286
Santiago	558-559
Santorini	242
Sat	618-619
Scarab	290
Scirocco	269
Scott	229
Seattle	457
Segmento	168-169
Sensitive	479
Senso	151
Sensori	637
Sensori industriali	658
Sensori strip	351
Sestriere	245
Shadow	143
Shelby	596-597
Shelf	336
Shelly	483
Shelly q	481
Shelly q mw	482
Shine	226
Shiva	610
Sigma	256
Sinkro	94-95
Sintesi	502
Skilift	154-155
Skittle	534-535
Skyp	607
Skyron	273
Slab	586
Slide	40
Slim	112-113
Smile	588-589
Snow	149
Sonar	338
Soul	223
Space	203
Space s	202
Spettro	145
Spirit	147
Splitter	689
Sprint	672
Stargate xp	656-657
Starlight	86
Starlight kit	87
Starry	137
Station	507
Stealth	402-403
Stenos q	164
Stenos r	165
Step r1	573
Step r4	572
Steplight	594-595
Stone	241
Streetway	650
Strip 2835 120	361
Strip 2835 240	364
Strip 2835 3d	357
Strip 2835 60	358
Strip 2835 cct	363
Strip 2835 ip67 60	359
Strip 2835 kit	378
Strip 3838 168 rgb	376
Strip 5050 rgb cct	374

INDICE ALFABETICO
ALPHABETICAL INDEX

Articolo	Pagina
Strip 5050 3d	372
Strip 5050 60	365
Strip 5050 ip67 60	366
Strip 5050 ip67 rgb	369
Strip 5050 rgb	368
Strip 5050 rgb kit	379
Strip 5050 rgbw	370/669
Strip 5050 rgbw ip68	371/670
Strip cc15	367
Strip cc30	356
Strip cob	354
Strip surround	385-387
Subway	567
Sunlite	690-691
Sunny	304-305
Superia	665
T5	326-327
T8	320-321
Target	671
Taurus	634-635
Taylor	384
Techno	300-301
Techno nik	302-303
Ted	600
Tema	36-37
Teste palo	552-553
Togo	466-467
Tokyo	510-511
Town	196-197
Trevis	684-685
Trigger	337
Tripod	637
Tron	108-109
Tubex	138-139
Tubo	41
Tucson	454-455
Tunnel	407

Articolo	Pagina
Tutor	470-471
Twilight	264
Twin	416-417
Ulysse	611
Underwood	508-509
Unix	314-317
Unix ang	318.319
Venezia	560-561
Vertigo	472-473
Veyron	408-409
Viper	161
Vista	339
Vortex	200-201
Vulkan	140
Vysor	614-615
Walk	574-576
Wallwasher	676-677
Wally	290
Wizard	494-495
Xanto int	102
Xanto q	104-105
Xanto r	100-101
Xanto rf	667
Xico	198-199
York	532-533
Young	338
Zak	332-333
Zenit	131
Zero	296-297
Zeus	640-641
Zonda	425
Zoom	468-469

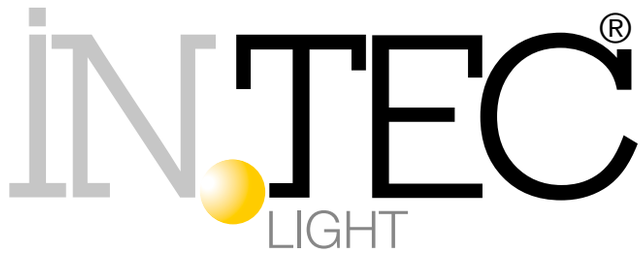
IN.TEC®
LIGHT

INTEC fa un salto nel futuro con il sistema Davinci, Sistema progettato per integrarsi totalmente con l'architettura degli ambienti. Esso può essere fissato al soffitto o alle pareti, Inserito nella muratura ad incasso a filo oppure nella versione a sospensione con luce bi-emissione.

Il binario Davinci è un binario completamente elettrificato a bassa tensione e si completa con elementi luminosi a LED inseribili semplicemente con un click, grazie all'incastro a sfere volventi, lungo tutto il percorso. Frutto della ricerca tecnologica più avanzata, il sistema consente di creare luce che scaturisce direttamente dalle pareti o dal soffitto, e gioca con gli spazi abitativi tracciando segni luminosi che variano a seconda della posizione del corpo illuminante, posizione che può essere modificata con la massima versatilità in ogni momento grazie al semplice inserimento dei corpi illuminanti all'interno del binario tramite il fluido sistema di innesti a sfere volventi. La diversificata gamma di corpi illuminanti Davinci, e la ampia scelta di forme, angoli e connessioni permettono la realizzazione di disegni illuminotecnici che esprimono la massima dinamicità e poliedricità delle personalizzazioni.

In base allo spazio da illuminare, è possibile aggiungere, rimuovere o orientare gli apparecchi, quando e dove necessario grazie ad un semplice click.
Il sistema Davinci a sfere volventi è basato sul sistema plug & play, non ha quindi bisogno di complessi interventi tecnici.Ogni corpo illuminante Davinci ha solo bisogno di essere posizionato, inserito ed acceso. All'interno del binario Davinci si può operare con inserimento di una vasta gamma di moduli di illuminazione decorativa sia con fari a spot orientabili, lampade sospese, che con lampade a led lineari fisse o movibili.

INTEC leap forward into the future with the Davinci system, System designed to fully integrate with the architecture environments. It can be fixed to the ceiling or to the walls, Inserted in the flush-mounted masonry or mounted in suspension version with single or bi-emission light.

Davinci track is a fully electrified low voltage track system and it is completed with LED light elements which can be inserted simply with a click, thanks to the joint a rolling spheres, all along the path. Fruit of most advanced technological research, the system allows you to create light that springs directly from the walls or ceiling, and plays with living spaces by drawing luminous signs that vary according to the position of the luminaire, position which can be modified with maximum versatility at any time thanks to the simple insertion of the LED luminous bodies inside the track by means of the fluid ball bearings. The diversified range of lighting fixtures Davinci, and the wide choice of shapes, angles and connections allow the creation of lighting designs which express the maximum dynamism and versatility of the customizations.

Depending on the space to be illuminated, it is possible to add,
remove or orient the appliances when and where necessary thanks to a simple click.
The Davinci rolling ball system is based on the system plug & play, therefore it does not need complex interventions of technicians. Every Davinci luminaire just needs to be positioned, inserted and switched on.
Inside the track Davinci can be inserted a wide range of decorative lighting modules with headlights, adjustable spots, suspended lamps, and with LED linear lamps fixed or movable.

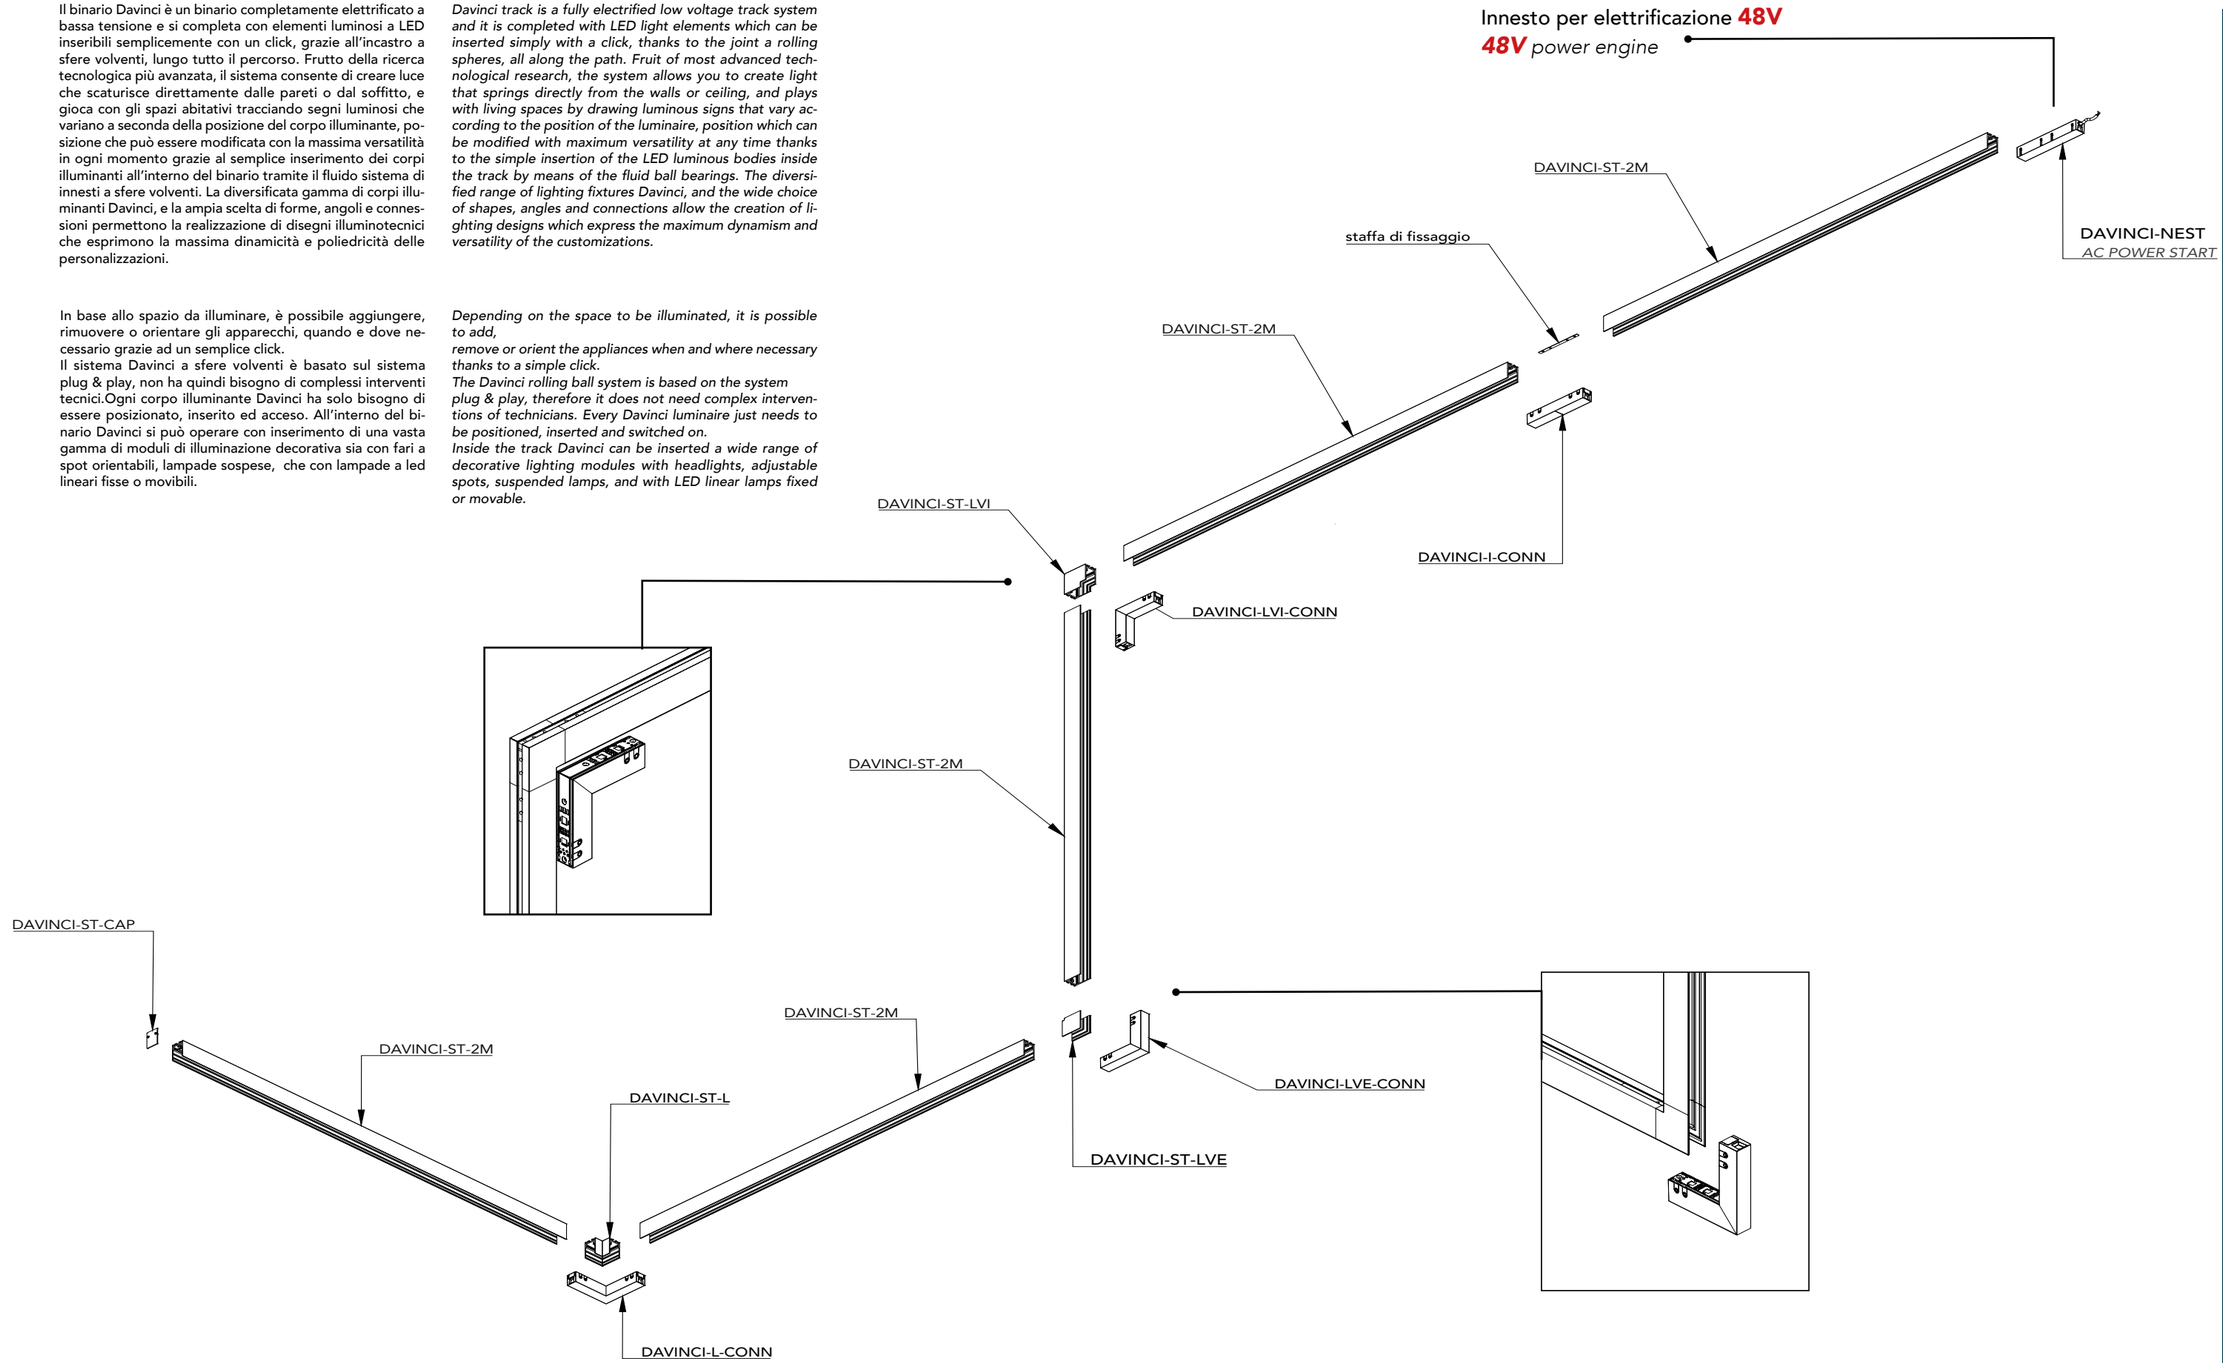

Recessed track(trimless)

Sistema di montaggio a incasso a filo
recess mount system trimless



Pendant

Sistema di montaggio a sospensione* biemissione
Biemission suspension mounting system*



DA VINCI
48V PROJECT

Surface mounted

Sistema di montaggio a plafoniera o a sospensionea vista
Ceiling or suspension mounting system



Recessed track

Sistema di montaggio a incasso con cornice
Recess mount system with external trim



TEMA

DC48V
Sfere volventi
Rolling spheres



Faro luce spot orientabile per sistema Davinci

Materiale
Corpo in alluminio pressofuso

Colore finitura
Nero matto

Sorgente luminosa
LED COB 5W - 10W - 20W - 30W

Driver
DC48V non incluso

Temperatura colore
3000K - 4000K

Flusso luminoso
500 Lm - 1000 Lm - 2000 Lm - 3000 Lm

Angolo di luce
38°

CRI
>90

Spot orientable track light for Davinci system

Material
Aluminum die cust body

Finiture colour
Matt black

Light source
LED COB 5W - 10W - 20W - 30W

Driver
DC48V not included

Colour temperature
3000K - 4000K

Luminous flux
500 Lm - 1000 Lm - 2000 Lm - 3000 Lm

Beam angle
38°

CRI
>90



DAVINCI-TEMA-5C 8031414876976		5W	500 LM
DAVINCI-TEMA-5M 8031414876983		5W	500 LM

Misure - Size
dimensioni in mm - size mm



Fotometria del Prodotto
Photometric curve of the product



DAVINCI-TEMA-5

TEMA



DAVINCI-TEMA-10C 8031414876990		10W	1000 LM
DAVINCI-TEMA-10M 8031414878215		10W	1000 LM

Misure - Size
dimensioni in mm - size mm



Fotometria del Prodotto
Photometric curve of the product



DAVINCI-TEMA-10



DAVINCI-TEMA-20C 8031414878222		20W	2000 LM
DAVINCI-TEMA-20M 8031414878239		20W	2000 LM

Misure - Size
dimensioni in mm - size mm



Fotometria del Prodotto
Photometric curve of the product



DAVINCI-TEMA-20



DAVINCI-TEMA-30C 8031414878246		30W	3000 LM
DAVINCI-TEMA-30M 8031414878253		30W	3000 LM

Misure - Size
dimensioni in mm - size mm



Fotometria del Prodotto
Photometric curve of the product



DAVINCI-TEMA-30

ACCESSORI TEMA

Retina antiabbagliamento
Anti glare retina



LED-KONE-MESH62 8031414870455	PER 10W
LED-KONE-MESH80 8031414870462	PER 20W
LED-KONE-MESH100 8031414870431	PER 30W

Deviatore Flusso luminoso
Luminous flux diverter



LED-KONE-DIFF62 8031414870448	PER 10W
LED-KONE-DIFF80 8031414870417	PER 20W
LED-KONE-DIFF100 8031414870424	PER 30W

LINE

DC48V
Sfere volventi
Rolling spheres



Lampada lineare LED per sistema Davinci

Materiale
Corpo in alluminio pressofuso

Colore finitura
Nero matto

Sorgente luminosa
LED SMD 10W - 20W - 30W - 40W

Driver
DC48V non incluso

Temperatura colore
3000K - 4000K

Flusso luminoso
1000 Lm - 2000 Lm - 3000 Lm - 4000 Lm

Angolo di luce
30° - 110°

CRI
>90

Linear LED light for Davinci system

Material
Aluminum die cust body

Finiture colour
Matt black

Light source
LED SMD 10W - 20W - 30W - 40W

Driver
DC48V not included

Colour temperature
3000K - 4000K

Luminous flux
1000 Lm - 2000 Lm - 3000 Lm - 4000 Lm

Beam angle
30° - 110°

CRI
>90



UGR<19

DAVINCI-LINE30C-UGR 8031414878321		10W	1000 LM	30°
DAVINCI-LINE30M-UGR 8031414878338		10W	1000 LM	30°

Misure - Size
dimensioni in mm - size mm



Fotometria del Prodotto
Photometric curve of the product



DAVINCI-LINE30 UGR



DAVINCI-LINE30C 8031414878260		10W	1000 LM	110°
DAVINCI-LINE30M 8031414878277		10W	1000 LM	110°

Misure - Size
dimensioni in mm - size mm



Fotometria del Prodotto
Photometric curve of the product



DAVINCI-LINE30



DAVINCI-LINE60C 8031414878284		20W	2000 LM	110°
DAVINCI-LINE60M 8031414878291		20W	2000 LM	110°

Misure - Size
dimensioni in mm - size mm



Fotometria del Prodotto
Photometric curve of the product



DAVINCI-LINE60



DAVINCI-LINE90C 8031414878666		30W	3000 LM	110°
DAVINCI-LINE90M 8031414878635		30W	3000 LM	110°

Misure - Size
dimensioni in mm - size mm



Fotometria del Prodotto
Photometric curve of the product



DAVINCI-LINE90



DAVINCI-LINE120C 8031414878642		40W	4000 LM	110°
DAVINCI-LINE120M 8031414878611		40W	4000 LM	110°

Misure - Size
dimensioni in mm - size mm



Fotometria del Prodotto
Photometric curve of the product



DAVINCI-LINE120

SLIDE

Lampada lineare orientabile LED per sistema Davinci

Orientable linear LED light for Davinci system

DC48V
Sfere volventi
Rolling spheres



Materiale
Corpo in alluminio pressofuso

Material
Aluminum die cust body

Colore finitura
Nero matto

Finiture colour
Matt black

Sorgente luminosa
LED SMD 10W

Light source
LED SMD 10W

Driver
DC48V non incluso

Driver
DC48V not included

Temperatura colore
3000K - 4000K

Colour temperature
3000K - 4000K

Flusso luminoso
1000 Lm

Luminous flux
1000 Lm

Angolo di luce
30° - 110°

Beam angle
30° - 110°

CRI
>90

CRI
>90



UGR<19

DAVINCI-SLIDE20C-UGR 8031414878369		10W	1000 LM	30°
DAVINCI-SLIDE20M-UGR 8031414878376		10W	1000 LM	30°

Misure - Size
dimensioni in mm - size mm



Fotometria del Prodotto
Photometric curve of the product



DAVINCI-SLIDE20 UGR



DAVINCI-SLIDE20C 8031414878345		10W	1000 LM	110°
DAVINCI-SLIDE20M 8031414878352		10W	1000 LM	110°

Misure - Size
dimensioni in mm - size mm



Fotometria del Prodotto
Photometric curve of the product



DAVINCI-SLIDE20

TUBO

Lampada sospensione LED per sistema Davinci

Suspension LED light for Davinci system

DC48V
Sfere volventi
Rolling spheres



Materiale
Corpo in alluminio pressofuso

Material
Aluminum die cust body

Colore finitura
Nero matto

Finiture colour
Matt black

Sorgente luminosa
LED COB 3W - 5W

Light source
LED COB 3W - 5W

Driver
DC48V non incluso

Driver
DC48V not included

Temperatura colore
3000K - 4000K

Colour temperature
3000K - 4000K

Flusso luminoso
300 Lm - 500 Lm

Luminous flux
300 Lm - 500 Lm

Angolo di luce
24°

Beam angle
24°

CRI
>90

CRI
>90



DAVINCI-S35C 8031414878390		3W	300 LM	
DAVINCI-S35M 8031414878406		3W	300 LM	

Misure - Size
dimensioni in mm - size mm



Fotometria del Prodotto
Photometric curve of the product



DAVINCI-S35



DAVINCI-S60C 8031414878680		5W	500 LM	
DAVINCI-S60M 8031414878659		5W	500 LM	

Misure - Size
dimensioni in mm - size mm



Fotometria del Prodotto
Photometric curve of the product



DAVINCI-S60





DAVINCI-H-2M
8031414878017

Binario sistema davinci montaggio a sospensione doppia emissione 2 metri nero 48V
Davinci system track rail suspension double emission black colour 2 meters 48V

Misure - Size
dimensioni in mm - size mm





DAVINCI-H-L
8031414878048

Connettore angolare per binario elettrificato biemissione sistema sfere volventi
Angular connection for davinci double emitting rail

Misure
dimensioni in mm
Size
size mm





DAVINCI-H-CAP
8031414878451

Tappo laterale per binario biemissione sistema sfere volventi
End cap for double emitting davinci rail



DAVINCI-BOX
8031414878598

Scatola per alloggio driver e collegamento elettrico binari davinci a sospensione
Canopy for driver and connection box for suspension davinci rail

Misure
dimensioni in mm
Size
size mm





DAVINCI-S-3
8031414879762

Sistema sospensione 3 metri per binari davinci
Sospension kit 3 meters for davinci rail



DAVINCI-INC-2M
8031414878024

Binario sistema davinci montaggio ad incasso 2 metri nero 48V
Davinci system track rail recessed mount black colour 2 meters 48V

Misure - Size
dimensioni in mm - size mm







DAVINCI-INC-L
8031414878116

Connettore angolare per binario elettrificato incasso sistema sfere volventi
Angular connection for davinci recessed rail

Misure
dimensioni in mm
Size
size mm





DAVINCI-INC-LVI
8031414878123

Connettore angolare verticale connessione interna per binario elettrificato incasso sistema sfere volventi
Angular internal emission connection for davinci recessed rail

Misure
dimensioni in mm
Size
size mm





DAVINCI-INC-LVE
8031414878130

Connettore angolare verticale connessione esterna per binario elettrificato incasso sistema sfere volventi
Angular external emission connection for davinci recessed rail

Misure
dimensioni in mm
Size
size mm





DAVINCI-INC-CAP
8031414878413

Tappo laterale per binario ad incasso sistema sfere volventi
End cap for recessed davinci rail



DAVINCI-TL-2M
8031414878055

Binario sistema davinci montaggio ad incasso a filo 2 metri nero 48V
Davinci system track rail invisible recessed trimless mount black colour 2 meters 48V

Misure - Size
dimensioni in mm - size mm







DAVINCI-TL-L
8031414878109

Connettore angolare per binario elettrificato incasso a filo (trimless) sistema sfere volventi
Angular connection for davinci trimless recessed rail

Misure
dimensioni in mm
Size
size mm





DAVINCI-TL-LVI
8031414878673

Connettore angolare verticale connessione interna per binario elettrificato incasso a filo (trimless) sistema sfere volventi
Angular internal emission connection for davinci trimless recessed rail

Misure
dimensioni in mm
Size
size mm





DAVINCI-TL-LVE
8031414878147

Connettore angolare verticale connessione esterna per binario elettrificato incasso a filo (trimless) sistema sfere volventi
Angular external emission connection for davinci trimless recessed rail

Misure
dimensioni in mm
Size
size mm





DAVINCI-TL-CAP
8031414878093

Tappo laterale per binario da incasso a filo (trimless) sistema sfere volventi
End cap for davinci invisible trimless recessed rail





DAVINCI-ST-2M
8031414878031

Binario sistema davinci montaggio a soffitto o sospensione 2 metri nero 48V
Davinci system track rail ceiling or suspension mount black colour 2 meters 48V

Misure - Size
dimensioni in mm - size mm





DAVINCI-ST-L
8031414878062

Connettore angolare per binario elettrificato montaggio a soffitto o sospensione sistema sfere volventi
Angular connection for davinci ceiling and suspension rail

Misure
dimensioni in mm
Size
size mm





DAVINCI-ST-LVI
8031414878079

Connettore angolare per binario elettrificato connessione interna sistema sfere volventi
Angular internal light emission connection for davinci ceiling and suspension rail

Misure
dimensioni in mm
Size
size mm





DAVINCI-ST-LVE
8031414878086

Connettore angolare per binario elettrificato connessione esterna sistema sfere volventi
Angular external light emission connection for davinci ceiling and suspension rail

Misure
dimensioni in mm
Size
size mm





DAVINCI-ST-CAP
8031414878468

Tappo laterale per binario montaggio a soffitto o sospensione sistema sfere volventi
End cap for davinci rail ceiling and single emitting suspension rail



DAVINCI-BOX
8031414878598

Scatola per alloggio driver e collegamento elettrico binari davinci a sospensione
Canopy for driver and connection box for suspension davinci rail

Misure
dimensioni in mm
Size
size mm





DAVINCI-S-3
8031414879762

Sistema sospensione 3 metri per binari davinci
Sospension kit 3 meters for davinci rail



DAVINCI-NEST
8031414878161

Innesto per elettrificazione 48V compatibile con tutti i modelli di binario del sistema davinci
48V power engine for all the davinci rail system models

Misure
dimensioni in mm
Size
size mm





DAVINCI-I-CONN
8031414878178

Connettore 48V compatibile con tutti i modelli di binario del sistema davinci
connector 48V compatible with all the davinci rail system models

Misure
dimensioni in mm
Size
size mm





DAVINCI-L-CONN
8031414878185

Connettore angolare 48V compatibile con tutti i modelli di binario del sistema davinci
connector angular 48V compatible with all the davinci rail system models

Misure
dimensioni in mm
Size
size mm





DAVINCI-LVI-CONN
8031414878192

Conn connettore angolare interno 48V compatibile con tutti i modelli di binario del sistema davinci
Connector angular internal 48V compatible with all the davinci rail system models

Misure
dimensioni in mm
Size
size mm





DAVINCI-LVE-CONN
8031414878208

Connettore angolare esterno 48V compatibile con tutti i modelli di binario del sistema davinci
Connector angular external 48V compatible with all the davinci rail system models

Misure
dimensioni in mm
Size
size mm





DAVINCI-COVER-2M
8031414878154

Cover nera compatibile con tutti i modelli di binario davinci 200 cm
Cover black colour compatible with all the davinci track rail models 200 cm



DAVINCI-BRAKE
8031414878383

Kit 2pz fermi per corpi illuminanti sistema sfere volventi
Side brake for davincy light source modules

Driver 48V per sistema davinci a pag. 704
48V drivers for davinci system page 704

MAXWELL

Lampada lineare con adattatore trifase

Linear lamp with tree phase adaptor



Materiale
Alluminio

Colore finitura
Bianco - nero

Sorgente luminosa
LED SMD 25W - 48W

Driver
integrato

Temperatura colore
3000K - 4000K

Flusso luminoso
3500 Lm - 6240 Lm

Durata e on/off
50.000 h ~ >25.000 on/off

Angolo di luce
90°

CRI
>82

Material
Aluminium

Finiture colour
White - black

Light source
LED SMD 25W - 48W

Driver
built-in

Color temperature
3000K - 4000K

Luminous flux
3500 Lm - 6240 Lm

Life time and on/off
50.000 h ~ >25.000 on/off

Beam angle
90°

CRI
>82

Accessori disponibili per lampada MAXWELL - *Accessories avaible for lamp MAXWELL*

BUSMAX-LENS-25
8031414884117

*Lente per doppio fascio luminoso 25°
**Double lens 25°*



BUSMAX-LENS-RL
8031414884124

*Lente fascio di luce asimmetrica 25° sx/dx
**Asymmetric lens 25° sx/dx*



Misure - Size
dimensioni in mm - size mm



*Per i modelli MAXWELL 25 occorrono 2 pezzi per l'intera lampada - Per i modelli MAXWELL 48 occorrono 4 pezzi per l'intera lampada
**2 pieces need for the whole MAXWELL 25 models - 4 pieces need for the whole MAXWELL 48 models*



MAXWELL-B-25C 8031414884070		25W	3500 LM
MAXWELL-B-25M 8031414884063		25W	3500 LM
MAXWELL-W-25C 8031414884056		25W	3500 LM
MAXWELL-W-25M 8031414884049		25W	3500 LM

Fotometria del Prodotto

Photometric curve of the product



Misure - Size
dimensioni in mm - size mm

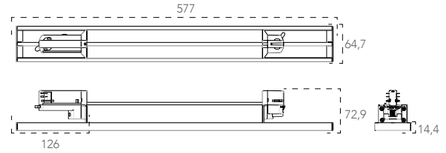



MAXWELL-B-48C 8031414884032		48W	6240 LM
MAXWELL-B-48M 8031414884025		48W	6240 LM
MAXWELL-W-48C 8031414884018		48W	6240 LM
MAXWELL-W-48M 8031414884001		48W	6240 LM

Fotometria del Prodotto

Photometric curve of the product



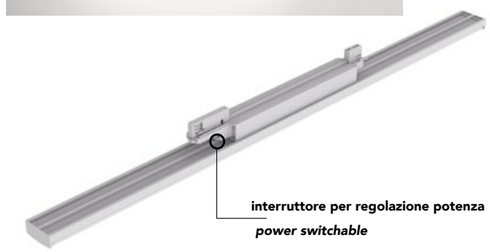

interruttore per regolazione potenza
power switchable

Potenza regolabile : 48W - 44W - 40W - 34W 130 LM/W
Adjustable power : 48W - 44W - 40W - 34W 130 LM/W

Misure - Size
dimensioni in mm - size mm

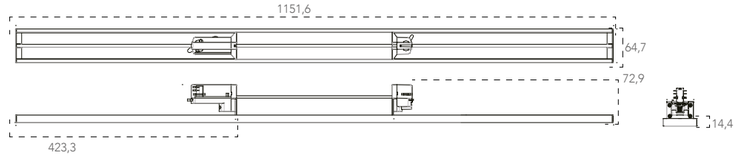







SMART INTEC
Bluetooth
Sig mesh

KONE

Trifase
Threephase

Faro binario con adattatore trifase

Materiale
Corpo in alluminio pressofuso

Colore finitura
Bianco matto - Nero matto

Track light with three phase adaptor

Material
Diecast aluminium

Finiture colour
Finish matt white or black



Sorgente luminosa
LED COB 30W

Driver
integrato

Temperatura colore
2700K 6500K

Flusso luminoso
3000 Lm

Angolo di luce
38°

CRI
>90

Light source
LED COB 30W

Driver
built-in

Colour temperature
2700K 6500K

Luminous flux
3000 Lm

Beam angle
38°

CRI
>90

CE EMC





LED-KONE-B-30BT 8031414866694		30W	3000 LM	PF 0,90
LED-KONE-W-30BT 8031414866656		30W	3000 LM	PF 0,90

Fotometria del Prodotto
Photometric curve of the product



LED-KONE-B-30BT
LED-KONE-W-30BT

Misure - Size
dimensioni in mm - size mm



ACCESSORI KONE

Retina antiabbagliamento
Anti glare retina

LED-KONE-MESH100
8031414870431



Deviatore Flusso luminoso
Luminous flux diverter

LED-KONE-DIFF100
8031414870424





KONE FOOD

Faro binario con adattatore trifase per l'illuminazione di generi alimentari

Track light with three phase adaptor for food lighting

Trifase
Threephase

Materiale
Corpo in alluminio pressofuso

Material
Diecast aluminium

Colore finitura
Bianco matto - Nero matto

Finiture colour
Finish matt white or black



Sorgente luminosa
LED COB 30W

Light source
LED COB 30W

Driver
integrato

Driver
built-in

Temperatura colore
2500K - 3000K - 3100K

Colour temperature
2500K - 3000K - 3100K

Flusso luminoso
3000 LM
2400 LM
2180 LM
3250 LM

Luminous flux
3000 LM
2400 LM
2180 LM
3250 LM

Angolo di luce
38°

Beam angle
38°





LED-KONE-B-30BR 8031414883356	2500K	3000 LM	PF 0,90	**CRI** >90
LED-KONE-W-30BR 8031414883370	2500K	3000 LM	PF 0,90	**CRI** >90



LED-KONE-B-30RM 8031414883332	3100K	2400 LM	PF 0,90	**CRI** >70
LED-KONE-W-30RM 8031414883400	3100K	2400 LM	PF 0,90	**CRI** >70



LED-KONE-B-30FM 8031414883349	3000K	2180 LM	PF 0,90	**CRI** >63
LED-KONE-W-30FM 8031414883387	3000K	2180 LM	PF 0,90	**CRI** >63

Misure - Size
dimensioni in mm - size mm





LED-KONE-B-30FR 8031414883363	3000K	3250 LM	PF 0,90	**CRI** >95
LED-KONE-W-30FR 8031414883394	3000K	3250 LM	PF 0,90	**CRI** >95

KONE

Trifase
Threephase

Faro binario con adattatore trifase invisibile

Materiale
Corpo in alluminio pressofuso

Colore finitura
Bianco matto - Nero matto - Rosa opaco
Verde opaco- Giallo opaco

Sorgente luminosa
LED COB 13W - 24W - 30W - 42W

Driver
incluso

Temperatura colore
3000K - 4000K

Flusso luminoso
1300 Lm - 2400 Lm - 3900 Lm - 4200 Lm

Angolo di luce
38°

CRI
>90

Track light with invisible three phase adaptor

Material
Aluminum die cust body

Finiture colour
matt white - matt black - matt green - matt pink - matt yellow

Light source
LED COB 13W - 24W - 30W - 42W

Driver
included

Colour temperature
3000K - 4000K

Luminous flux
1300 Lm - 2400 Lm - 3900 Lm - 4200 Lm

Beam angle
38°

CRI
>90





LED-KONE-ROS-24M 8031414866663		24W	2400 LM
LED-KONE-VER-24M 8031414866687		24W	2400 LM
LED-KONE-GIA-24M 8031414866700		24W	2400 LM

Misure - Size
dimensioni in mm - size mm



Fotometria del Prodotto
Photometric curve of the product



LED-KONE 24W



LED-KONE-B-13C 8031414867684		13W	1300 LM
LED-KONE-B-13M 8031414867622		13W	1300 LM
LED-KONE-W-13C 8031414867691		13W	1300 LM
LED-KONE-W-13M 8031414867677		13W	1300 LM

Misure - Size
dimensioni in mm - size mm



Fotometria del Prodotto
Photometric curve of the product



LED-KONE 13W



LED-KONE-B-24C 8031414867721		24W	2400 LM
LED-KONE-B-24M 8031414867707		24W	2400 LM
LED-KONE-W-24C 8031414867745		24W	2400 LM
LED-KONE-W-24M 8031414867714		24W	2400 LM

Misure - Size
dimensioni in mm - size mm



Fotometria del Prodotto
Photometric curve of the product



LED-KONE 24W



LED-KONE-B-30C 8031414866670		30W	3900 LM	PF 0,90
LED-KONE-B-30M 8031414883240		30W	3900 LM	PF 0,90
LED-KONE-W-30C 8031414883257		30W	3900 LM	PF 0,90
LED-KONE-W-30M 8031414883264		30W	3900 LM	PF 0,90

Misure - Size
dimensioni in mm - size mm



Fotometria del Prodotto
Photometric curve of the product



LED-KONE 30W



LED-KONE-B-42C 8031414867769		42W	4200 LM	PF 0,90
LED-KONE-B-42M 8031414867738		42W	4200 LM	PF 0,90
LED-KONE-W-42C 8031414867783		42W	4200 LM	PF 0,90
LED-KONE-W-42M 8031414867752		42W	4200 LM	PF 0,90

Misure - Size
dimensioni in mm - size mm



Fotometria del Prodotto
Photometric curve of the product



LED-KONE 42W

ACCESSORI KONE

Retina antiabbagliamento
Anti glare retina



LED-KONE-MESH62 8031414870455	PER 13W
LED-KONE-MESH80 8031414870462	PER 24W
LED-KONE-MESH100 8031414870431	PER 42W

Deviatore Flusso luminoso
Luminous flux diverter



LED-KONE-DIFF62 8031414870448	PER 13W
LED-KONE-DIFF80 8031414870417	PER 24W
LED-KONE-DIFF100 8031414870424	PER 42W

ACTION

Trifase
Threephase

Faro binario con adattatore trifase invisibile

Materiale
Corpo in alluminio pressofuso

Colore finitura
Bianco matto - Nero matto

Sorgente luminosa
LED COB 13W - 20W - 42W

Driver
incluso

Temperatura colore
3000K - 4000K

Flusso luminoso
1300 Lm - 2000 Lm - 4200 Lm

Angolo di luce
38°

CRI
>90

Track light with invisible three phase adaptor

Material
Diecast aluminium

Finiture colour
matt white or matt black

Light source
LED COB 13W - 20W - 42W

Driver
included

Colour temperature
3000K - 4000K

Luminous flux
1300 Lm - 2000 Lm - 4200 Lm

Beam angle
38°

CRI
>90





ACTION





LED-ACTION-B-13C 8031414867806		13W	1300 LM	
LED-ACTION-B-13M 8031414867776		13W	1300 LM	
LED-ACTION-W-13C 8031414867820		13W	1300 LM	
LED-ACTION-W-13M 8031414867790		13W	1300 LM	

Misure - Size
dimensioni in mm - size mm



Fotometria del Prodotto
Photometric curve of the product



LED-ACTION 13W



LED-ACTION-B-20C 8031414867844		20W	2000 LM	
LED-ACTION-B-20M 8031414867813		20W	2000 LM	
LED-ACTION-W-20C 8031414867837		20W	2000 LM	
LED-ACTION-W-20M 8031414866724		20W	2000 LM	

Misure - Size
dimensioni in mm - size mm



Fotometria del Prodotto
Photometric curve of the product



LED-ACTION 20W



LED-ACTION-B-42C 8031414867851		42W	4200 LM	PF 0,90
LED-ACTION-B-42M 8031414867868		42W	4200 LM	PF 0,90
LED-ACTION-W-42C 8031414867875		42W	4200 LM	PF 0,90
LED-ACTION-W-42M 8031414867882		42W	4200 LM	PF 0,90

Misure - Size
dimensioni in mm - size mm



Fotometria del Prodotto
Photometric curve of the product



LED-ACTION 42W

ACCESSORI ACTION

Retina antiabbagliamento
Honeycomb mesh



LED-ACTION-MESH50 8031414875986	PER 13W
LED-ACTION-MESH62 8031414875993	PER 20W
LED-ACTION-MESH90 8031414876006	PER 42W

Deviatore Flusso luminoso
Luminous Luminous flux diverter



LED-ACTION-DIFF50 8031414875955	PER 13W
LED-ACTION-DIFF62 8031414875962	PER 20W
LED-ACTION-DIFF90 8031414875979	PER 42W

ROCKET

Trifase
Threephase

Faro binario con adattatore trifase

Materiale
Corpo in alluminio pressofuso

Colore finitura
Bianco matto - Nero matto - Bronzo
Cromo - Oro

Sorgente luminosa
LED COB 7W

Driver
integrato

Temperatura colore
3000K - 4000K

Flusso luminoso
700 Lm

Angolo di luce
38°

CRI
>80

Track light with three phase adaptor

Material
Diecast aluminium

Finiture colour
Matt white - Matt black - Gold - Chrome - Bronze

Light source
LED COB 7W

Driver
built-in

Colour temperature
3000K - 4000K

Luminous flux
700 Lm

Beam angle
38°

CRI
>80





Fotometria del Prodotto

Photometric curve of the product



LED-ROCKET-7

LED-ROCKET-7C CR 8031414864294	●	■	7W
LED-ROCKET-7M CR 8031414864317	○	■	7W
LED-ROCKET-7C ORO 8031414864164	●	■	7W
LED-ROCKET-7M ORO 8031414864737	○	■	7W
LED-ROCKET-7C BRO 8031414864188	●	■	7W
LED-ROCKET-7M BRO 8031414864744	○	■	7W
LED-ROCKET-7C NERO 8031414861965	●	■	7W
LED-ROCKET-7M NERO 8031414864300	○	■	7W
LED-ROCKET-7C BCO 8031414861972	●	■	7W
LED-ROCKET-7M BCO 8031414864171	○	■	7W

Misure - Size
dimensioni in mm - size mm



ROCKET

Spot applique

Materiale
Corpo in alluminio pressofuso

Colore finitura
Bianco matto - Nero matto

Sorgente luminosa
LED COB 7W

Driver
integrato

Temperatura colore
3000K - 4000K

Flusso luminoso
700 Lm

Angolo di luce
38°

CRI
>80

Wall spot light

Material
Diecast aluminium

Finiture color
Matt white - Matt black

Light source
LED COB 7W

Driver
built-in

Color temperature
3000K - 4000K

Luminous flux
700 Lm

Beam angle
38°

CRI
>80





Misure - Size
dimensioni in mm - size mm



LED-ROCKET-APC NERO 8031414861989	●	■	7W
LED-ROCKET-APM NERO 8031414864980	○	■	7W
LED-ROCKET-APC BCO 8031414861996	●	□	7W
LED-ROCKET-APM BCO 8031414864966	○	□	7W

Fotometria del Prodotto

Photometric curve of the product



LED-ROCKET-APC

OBOE

Trifase
Threephase

Sospensione in alluminio con adattatore trifase

Materiale
Corpo in alluminio pressofuso

Colore finitura
Cromo - Bronzo - Oro - Nero - Bianco

Sorgente luminosa
LED COB 3,5W

Driver
integrato

Temperatura colore
3000K - 4000K

Flusso luminoso
280 Lm

Angolo di luce
40°

CRI
>80

Aluminum pendant lamp with three phase adaptor

Material
Diecast aluminium

Finiture colour
White - Black - Gold - Chrome - Bronze

Light source
LED COB 3,5W

Driver
built-in

Colour temperature
3000K - 4000K

Luminous flux
280 Lm

Beam angle
40°

CRI
>80





LED-OBOE-SC BCO 8031414865109		3,5W
LED-OBOE-SM BCO 8031414862047		3,5W
LED-OBOE-SC NERO 8031414865147		3,5W
LED-OBOE-SM NERO 8031414862030		3,5W
LED-OBOE-SC ORO 8031414865123		3,5W
LED-OBOE-SM ORO 8031414862054		3,5W
LED-OBOE-SC CR 8031414865130		3,5W
LED-OBOE-SM CR 8031414862061		3,5W
LED-OBOE-SC BRO 8031414865116		3,5W
LED-OBOE-SM BRO 8031414864287		3,5W

Misure - Size
dimensioni in mm - size mm

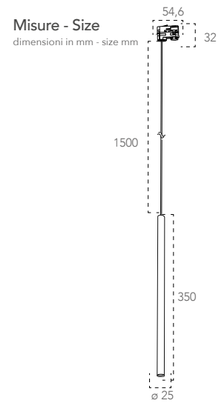

Fotometria del Prodotto
Photometric curve of the product



LED-OBOE-SC

CLOCK

Trifase
Threephase

Sospensione con adattatore trifase

Materiale
Alluminio con cavo in tessuto nero

Colore finitura
Cromo - Nero anodizzato

Sorgente luminosa
1xE27

Pendant lamp with three phase adaptor

Material
Aluminium with black fabric cable

Finiture colour
Chrome - black anodized

Light source
1xE27





I-TRACK-CLOCK-CR 8031414864072		1xE27 max 60w non incluse - *not included*
I-TRACK-CLOCK-NERO 8031414864096		1xE27 max 60w non incluse - *not included*

Misure - Size
dimensioni in mm - size mm

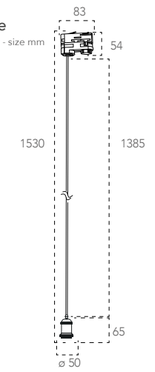



SQUIB

Faro binario con adattatore trifase

Track light with three phase adaptor

Trifase
Threephase

Materiale
Alluminio

Material
Aluminium

Colore finitura
Bianco matto - Nero matto

Finiture colour
Satin white - Satin black

Sorgente luminosa
1xGU10

Light source
1xGU10



I-SQUIB-BCO 8031414883226		**1XGU10 MAX 25W**	Lampadina non inclusa *Light bulb not included*
I-SQUIB-NER 8031414883233		**1XGU10 MAX 25W**	Lampadina non inclusa *Light bulb not included*

Misure - Size
dimensioni in mm - size mm



EXPRESS

Faro binario con adattatore trifase

Track light with three phase adaptor

Trifase
Threephase

Materiale
Metallo

Material
Metal

Colore finitura
Bianco satinato - Nero satinato

Finiture colour
Satin white - Satin black

Sorgente luminosa
1xE27

Light source
1xE27



LED-EXPRESS 8031440360470		1xE27 max 42w non incluse - *not included*
LED-EXPRESS-B 8031414864676		1xE27 max 42w non incluse - *not included*

Misure - Size
dimensioni in mm - size mm



HELP TRACK

Lampade di emergenza LED per sistema binario trifase

Emergency threephase lamp



Emergency light

LED SMD

Sorgente luminosa
Light source

Materiale
Policarbonato

Colore
Bianco Nero

Driver
integrato

Batteria per emergenza
Inclusa LiFePO4 3.2V 3200mAh

Sorgente luminosa
LED SMD 2W

Temperatura colore
4000K

Flusso luminoso
250 Lm

Angolo di luce
140°

Material
Polycarbonate

Colour
White Black

Driver
Built-in

Emergency battery
included LiFePO4 3.2V 3200mAh

Light source
LED SMD 2W

Color temperature
4000K

Luminous flux
250 Lm

Beam angle
140°



LED-HELP-B-TRACK
8031414884162

LED-HELP-W-TRACK
8031414884179

Misure - size
dimensioni in mm - size mm





TRACK



Trifase
Threephase

Schema di montaggio sistema binari
Assembling technical sheet track rail system

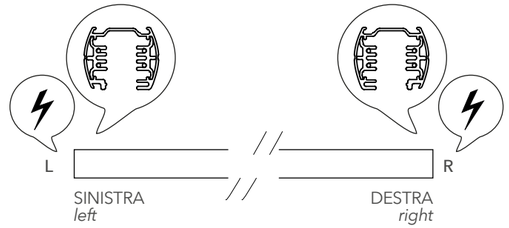





Innesto per collegamento elettrico
Connector for electrical connection

track nest L
Connettore a L con collegamento elettrico
L connector with electrical connection



track nest T
Connettore a T con collegamento elettrico
T connector with electrical connection

track nest I



Connettore lineare con collegamento elettrico
Linear connector with electrical connection

track mini



Connettore lineare
Linear connector

track S



Kit sospensione per binario
Kit suspension for track rail

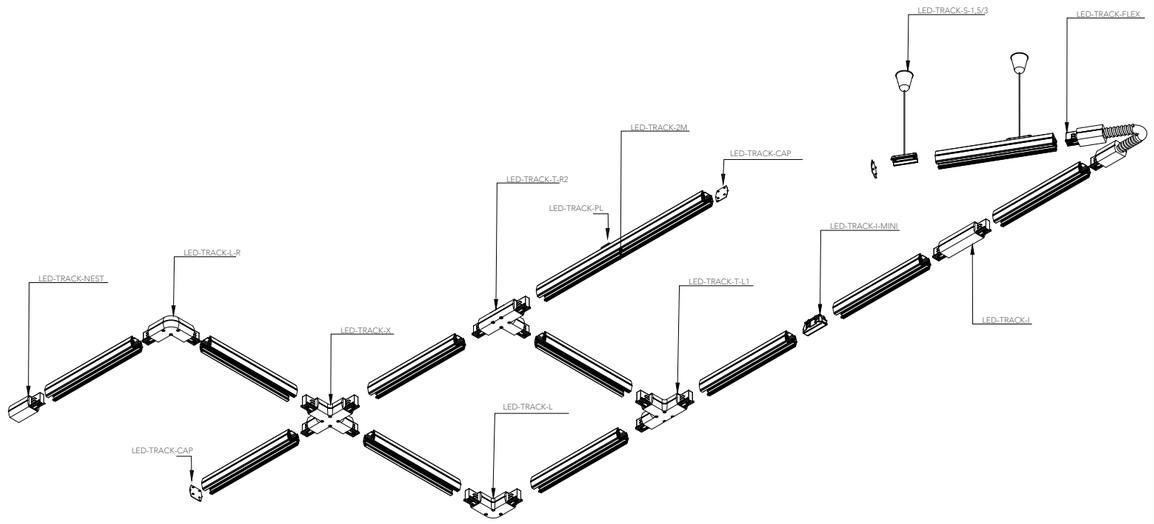



LED-TRACK-1M
8031439221263

Binari elettrificati trifase in alluminio bianco 1 metro (tappi inclusi)
1 meter track rail in white aluminium with three phase adaptor (endcap included)

Misure - Size
dimensioni in mm
size mm



LED-TRACK-2M
8031440360340

Binari elettrificati trifase in alluminio bianco 2 metri (tappi inclusi)
2 meters track rail in white aluminium with three phase adaptor (endcap included)

LED-TRACK-3M
8031440360357

Binari elettrificati trifase in alluminio bianco 3 metri (tappi inclusi)
3 meters track rail in white aluminium with three phase adaptor (endcap included)



LED-TRACK-1M NERO
8031440360425

Binari elettrificati trifase in alluminio nero 1 metro (tappi inclusi)
1 meter track rail in black aluminium with three phase adaptor (endcap included)

Misure - Size
dimensioni in mm
size mm



LED-TRACK-2M NERO
8031440360364

Binari elettrificati trifase in alluminio nero 2 metri (tappi inclusi)
2 meters track rail in black aluminium with three phase adaptor (endcap included)

LED-TRACK-3M NERO
8031440360371

Binari elettrificati trifase in alluminio nero 3 metri (tappi inclusi)
3 meters track rail in black aluminium with three phase adaptor (endcap included)



LED-TRACK-PL
8031440358668

Kit 2pz. basette bianche per binario guida trifase
Kit 2pcs. white Base for track rail three phase

Misure - Size
dimensioni in mm
size mm





LED-TRACK-PL NERO
8031440358699

Kit 2pz. basette nere per binario guida trifase
Kit 2pcs. black Base for track rail three phase



LED-TRACK-BASE
8031440361668

Base tonda bianca per faro con adattatore trifase (non adatto per art. KONE, ACTION,EAGLE)
White round base for track lamp with three phase adaptor (not useful items KONE, ACTION, EAGLE)

Misure - Size
dimensioni in mm
size mm





LED-TRACK-BASE NERO
8031440361675

Base tonda nera per faro con adattatore trifase (non adatto per art. KONE, ACTION,EAGLE)
Black round base for track lamp with three phase adaptor (not useful items KONE, ACTION, EAGLE)



LED-TRACK-CAP
8031414866229

Tappo per binario bianco
White cap for three phase track rail

Misure - Size
dimensioni in mm
size mm





LED-TRACK-CAP NERO
8031414866205

Tappo per binario nero
Black cap for three phase track rail



LED-TRACK-ADAT
8031414866410

Adattatore bianco per binario trifase
White adapt for three phase track rail

Misure - Size
dimensioni in mm
size mm





LED-TRACK-ADAT NERO
8031414866397

Adattatore nero per binario trifase
Black adapt for three phase track rail



LED-TRACK-S-1,5
8031440359061

Sistema sospensione 1,5 metri per binari bianco
White sospension kit 1,5 meters for track rail

Misure - Size
dimensioni in mm
size mm



LED-TRACK-S-3
8031440359047

Sistema sospensione 3 metri per binari bianco
White sospension kit 3 meters for rail track



LED-TRACK-S-1,5 NERO
8031440359078

Sistema sospensione 1,5 metri per binari nero
Black sospension kit 1,5 meters for track rail

Misure - Size
dimensioni in mm
size mm



LED-TRACK-S-3 NERO
8031440359054

Sistema sospensione 3 metri per binari nero
Black sospension kit 3 meters for track rail





LED-TRACK-I-MINI
8031440358705

Connettore lineare mini bianco a scomparsa per sistema binari trifase
White mini invisible connector for three phase track rail system

Misure - Size
dimensioni in mm
size mm





LED-TRACK-I-MINI NERO
8031440357845

Connettore lineare mini nero a scomparsa per sistema binari trifase
Black mini invisible connector for three phase track rail system



LED-TRACK-NEST
8031440311564

Innesto bianco sinistro per binari guida entrata L N + cavo di terra per circuito a trifase
White Recess power connector left side for three phase track rail, L N input + ground cable for three-phase circuit

Misure - Size
dimensioni in mm
size mm



LED-TRACK-NEST-R
8031440359009

Innesto bianco destro per binari guida entrata L N + cavo di terra per circuito a trifase
White Recess power connector right side for three phase track rail, L N input + ground cable for three-phase circuit



LED-TRACK-NEST NERO
8031440360418

Innesto nero sinistro per binari guida entrata L N + cavo di terra per circuito a trifase
Black Recess power connector left side for three phase track rail, L N input + ground cable for three-phase circuit

LED-TRACK-NEST-R NERO
8031440359016

Innesto nero destro per binari guida entrata L N + cavo di terra per circuito a trifase
Black Recess power connector right side for three phase track rail, L N input + ground cable for three-phase circuit



LED-TRACK-I
8031440311526

Connettore bianco lineare per binari sistema trifase
White straight connector for three phase track rail system

Misure - Size
dimensioni in mm
size mm





LED-TRACK-I NERO
8031440360432

Connettore nero lineare per binari sistema trifase
Black straight connector for three phase track rail system



LED-TRACK-FLEX
8031440359085

Connettore bianco flessibile per sistema trifase
White flexible power connector for three phase track rail system

Misure - Size
dimensioni in mm
size mm





LED-TRACK-FLEX NERO
8031440359030

Connettore nero flessibile per sistema trifase
Black flexible power connector for three phase track rail system



LED-TRACK-X
8031439231262

Connettore a croce bianco per sistema trifase
White extension X shape for three phase track rail system

Misure - Size
dimensioni in mm
size mm





LED-TRACK-X NERO
8031440360395

Connettore a croce nero per sistema trifase
Black extension X shape for three phase track rail system



LED-TRACK-L-R
8031440358972

Connettore bianco track destro a elle per binari guida trifase
White L connector right side for three phase track rail system

Misure - Size
dimensioni in mm
size mm



LED-TRACK-L
8031439241261

Connettore bianco track sinistro a elle per binari guida trifase
White L connector left side for three phase track rail system



LED-TRACK-L-R NERO
8031440359023

Connettore nero track destro a elle per binari guida trifase
Black L connector right side for three phase track rail system

LED-TRACK-L NERO
8031440360401

Connettore nero track sinistro a elle per binari guida trifase
Black L connector left side for three phase track rail system



LED-TRACK-T
8031440311571

Connettore bianco destro a T per binari guida entrata L N + cavo di terra per circuito a trifase
White T connector right side for three phase track rail system, L N input + ground cable

Misure - Size
dimensioni in mm
size mm





LED-TRACK-T NERO
8031440360388

Connettore nero destro a T per binari guida entrata L N + cavo di terra per circuito a trifase
White T connector right side for three phase track rail system, L N input + ground cable



LED-TRACK-T-L1
8031440358989

Connettore bianco sinistro a T per binari guida entrata L N + cavo di terra per circuito a trifase
White T connector right side for three phase track rail system, L N input + ground cable



LED-TRACK-T-L1 NERO
8031440358996

Connettore nero sinistro a T per binari guida entrata L N + cavo di terra per circuito a trifase
White T connector right side for three phase track rail system, L N input + ground cable



LED-TRACK-T-R1
8031440357449

Connettore bianco destro a T per binari guida entrata L N + cavo di terra per circuito a trifase
White T connector right side for three phase track rail system

Misure - Size
dimensioni in mm
size mm





LED-TRACK-T-R1 NERO
8031440357456

Connettore nero destro a T per binari guida entrata L N + cavo di terra per circuito a trifase
Black T connector right side for three phase track rail system



LED-TRACK-T-R2
8031440357487

Connettore bianco sinistro a T per binari guida entrata L N + cavo di terra per circuito a trifase
White T connector left side for three phase track rail system

Misure - Size
dimensioni in mm
size mm





LED-TRACK-T-R2 NERO
8031440357661

Connettore nero sinistro a T per binari guida entrata L N + cavo di terra per circuito a trifase
Black T connector left side for three phase track rail system



INC-TRACK-NEST
8031414871193

Innesto sinistro per binario ad incasso trifase bianco
White recess power connector left side for three phase track rail

Misure - Size
dimensioni in mm
size mm



INC-TRACK-NEST-R
8031414871179

Innesto destro per binario ad incasso trifase bianco
White recess power connector right side for three phase track rail



INC-TRACK-NEST NERO
8031414871209

Innesto sinistro per binario ad incasso trifase nero
Black recess power connector left side for three phase track rail

Misure - Size
dimensioni in mm
size mm



INC-TRACK-NEST-R NERO
8031414871186

Innesto destro per binario ad incasso trifase nero
Black recess power connector right side for three phase track rail



INC-TRACK-I
8031414871254

Connettore bianco lineare ad incasso per binari trifase
White recess straight connection for three phase track rail system

Misure - Size
dimensioni in mm
size mm





INC-TRACK-I NERO
8031414871261

Connettore nero lineare ad incasso per binari trifase
Black recess straight connection for three phase track rail system



INC-TRACK-L-R
8031414871216

Connettore bianco ad incasso destro a L per binari trifase
White recess L connector right side for three phase track rail system

Misure - Size
dimensioni in mm
size mm



INC-TRACK-L
8031414871230

Connettore bianco ad incasso sinistro a L per binari trifase
White recess L connector left side for three phase track rail system



INC-TRACK-L-R NERO
8031414871223

Connettore nero ad incasso destro a L per binari trifase
Black recess L connector right side for three phase track rail system

Misure - Size
dimensioni in mm
size mm



INC-TRACK-L NERO
8031414871247

Connettore nero ad incasso sinistro a L per binari trifase
Black recess L connector left side for three phase track rail system



LED-TRACK-1M-INC
8031440361804

Binario trifase ad incasso bianco 1m
Recessed track rail in white aluminium 1m

Misure - Size
dimensioni in mm
size mm



LED-TRACK-2M-INC
8031440361811

Binario trifase ad incasso bianco 2m
Recessed track rail in white aluminium 2m



LED-TRACK-1M-INC NERO
8031414864836

Binario trifase ad incasso nero 1m
Recessed track rail in black aluminium 1m

Misure - Size
dimensioni in mm
size mm



LED-TRACK-2M-INC NERO
8031414864058

Binario trifase ad incasso nero 2m
Recessed track rail in black aluminium 2m



INC-TRACK-STAFFE
8031414879700

Kit 2pz staffe zincate per binario incasso
Kit 2pcs metal bracket for recessed track rail

Misure - Size
dimensioni in mm
size mm





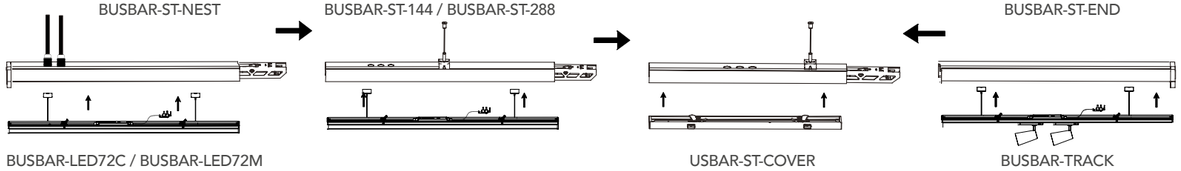



Sistema di fissaggio a soffitto o a sospensione
Ceiling mount or pendant fixing system



Estensibile grazie ai moduli in 2 misure
Extendable thanks to the extruded aluminum modules



7 cavi L1 L2 L3 N E D+ D- trifase più dimmer
7 wire connection system L1 L2 L3 N E D+ D- three-phase + dimmer



Sistema easy di fissaggio della lampada
Lamp easy installation system

Montaggio senza attrezzi
Toolless Mounting

IP54



Antipolvere e antispruzzo
Dustproof and Splashproof

LED rivestiti contro le influenze esterne
Coated LEDs Against External Influences

Lenti per diversi fasci di luce
Different beam angles optional lens



Lente inclusa
included lens



Lente opzionale/optional lens
doppio fascio luminoso 25°
double lens 25°



Lente opzionale/optional lens
fascio di luce asimmetrico 25° sx/dx
asymmetric lens 25° sx/dx





BUSBAR

Lampada lineare per sistema trunking

Linear lamp for trunking system

IP54



Materiale
Alluminio

Material
Aluminium

Colore finitura
Bianco

Finiture colour
White

Sorgente luminosa
LED SMD 72W

Light source
LED SMD 72W

Driver
integrato

Driver
built-in

Temperatura colore
3000K - 4000K

Color temperature
3000K - 4000K

Flusso luminoso
12240 Lm - 11520 Lm

Luminous flux
12240 Lm - 11520 Lm

Durata e on/off
50.000 h ~ >25.000 on/off

Life time and on/off
50.000 h ~ >25.000 on/off

Angolo di luce
90°

Beam angle
90°

CRI
>82

CRI
>82

Grado IK
IK08

IK degree
IK08

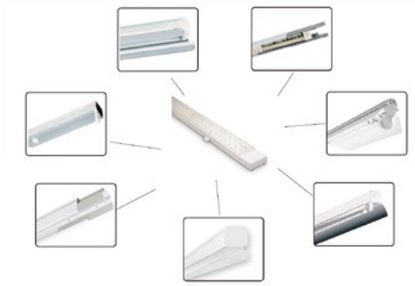

Compatibile con altri sistemi trunking in commercio
Compatible with other trunking systems

Dimmer 1-10

BUSBAR-LED72C 8031414883936		**72W**	**12240 LM**
BUSBAR-LED72M 8031414883929		**72W**	**11520 LM**

Fotometria del Prodotto

Photometric curve of the product



Misure - Size
dimensioni in mm - size mm



Accessori disponibili per lampada BUSBAR - *Accessories avaible for lamp BUSBAR*

BUSMAX-LENS-25 8031414884117	*Lente per doppio fascio luminoso 25° **Double lens 25°*



BUSMAX-LENS-RL 8031414884124	*Lente fascio di luce asimmetrica 25° sx/dx **Asymmetric lens 25° sx/dx*



Misure - Size
dimensioni in mm - size mm



*Per tutta la lampada BUSBAR occorrono 5 pezzi / *5 pieces need for the whole BUSBAR lamp*



BUSBAR-ST-NEST
8031414883943

Binario innesto 7 cavi per alimentazione
Feed in trunking with 7 input wire

Misure - Size
dimensioni in mm
size mm





BUSBAR-ST-END
8031414883950

Binario terminale 7 cavi con sistema di connessione multipla
Feed end trunking with 7 wire and multiconnection system

Misure - Size
dimensioni in mm
size mm





BUSBAR-ST-144
8031414883967

Binario intermedio 7 cavi
Intermediate trunking with 7 wire

Misure - Size
dimensioni in mm
size mm





BUSBAR-ST-288
8031414883974

Binario intermedio 7 cavi
Intermediate trunking with 7 wire

Misure - Size
dimensioni in mm
size mm





BUSBAR-ST-L
8031414884087

Connettore a L 7 cavi
L connector with 7 wire

Misure - Size
dimensioni in mm
size mm





BUSBAR-ST-T
8031414884100

Connettore a t 7 cavi
T connector with 7 wire

Misure - Size
dimensioni in mm
size mm





BUSBAR-ST-X
8031414884094

Connettore a x 7 cavi
X connector with 7 wire

Misure - Size
dimensioni in mm
size mm





BUSBAR-ST-COVER
8031414883981

Cover di alluminio bianco
White aluminum cover

Misure - Size
dimensioni in mm
size mm





BUSBAR-SENS
8031414884131

Cover elettrificata incluso sensore di movimento e crepuscolare 3 funioni
Electrified cover with crepuscolar and montion sensor
3 functions

Misure - Size
dimensioni in mm
size mm



1 Function



In un ambiente sufficientemente luminoso la lampada non si accende anche se viene rilevato movimento.
With sufficient ambient light, the light will not be switched on even if with motion signal

In un ambiente poco luminoso il sensore accende la lampada non appena viene rilevato un movimento.
With insufficient ambient light, the sensor switches on the light when motion is detected

Trascorso il tempo di attesa , il sensore spegne la lampada quando non viene rilevato movimento.
After elapse of hold time, the sensor switches off the light when no motion is detected

2 Function



Se non viene rilevato movimento la lampada rimane ad un basso livello di luminosità
If there is motion detected, the light will be remained at a low light level all the time

Quando viene rilevato movimento, il sensore porta la lampada al 100% di luminosità
When motion is detected, the sensor will switch on the light to 100% brightness

Trascorso il tempo di attesa , il sensore attenua la luce all'attuale livello di luminosità se non è rilevato movimento
After elapse of hold time, the sensor dims the light at present low light level if no motion is detected

3 Function



In un ambiente sufficientemente luminoso la lampada non si accende anche se viene rilevato movimento.
With sufficient ambient light, the light will not be switched on even if with motion signal

In un ambiente poco luminoso il sensore accende la lampada non appena viene rilevato un movimento.
With insufficient ambient light, the sensor switches on the light when motion is detected

Trascorso il tempo di attesa , il sensore attenua la luce all'attuale livello di luminosità se non è rilevato movimento
After elapse of hold time, the sensor dims the light at present low light level if no motion is detected

Trascorso il tempo di standby il sensore spegne la lampada se non è rilevato movimento
After elapse of standby period, the sensor switches off the light if no motion is detected



LED-SENSOR-REMOTE
8031414879717

Radiocomando per sensori industriali
Industrial sensors remote control



BUSBAR-TRACK
8031414884148

Cover elettrificata con binario trifase
Electrified cover with trephase track system

Misure - Size
dimensioni in mm
size mm





BUSBAR-FIX
8031414884155

Kit 2pz staffe per fissaggio a plafoniera
Bracket kit 2 pcs

Misure - Size
dimensioni in mm
size mm





BUSBAR-ST-SOSP
8031414883998

Kit 2pz cavi per binario a sospensione cavo 5 metri
Suspension kit 2pcs with 5 meters cable





APOLLO

Incasso antiriflesso luce spot
con doppia orientabilità

Materiale

Alluminio

Colore finitura

Bordo bianco e interno nero satinato

Sorgente luminosa

LED COB 10W - 20W - 30W - 45W

Driver

incluso

Temperatura colore

3000K - 4000K

Punti luce

1 - 2 - 3

Flusso luminoso

800 Lm - 1600 Lm - 2400 Lm - 3600 Lm
1600 Lm - 3200 Lm - 4800 Lm - 7200 Lm
2400 Lm - 4800 Lm - 7200 Lm - 10800 Lm

Angolo di luce

40°

CRI

>80

Antiglare recess spot light
with double orientability

Material

Aluminium

Finiture colour

body with white edge and satin black internal

Light source

LED COB 10W - 20W - 30W - 45W

Driver

included

Colour temperature

3000K - 4000K

Number of light sources

1 - 2 - 3

Luminous flux

800 Lm - 1600 Lm - 2400 Lm - 3600 Lm
1600 Lm - 3200 Lm - 4800 Lm - 7200 Lm
2400 Lm - 4800 Lm - 7200 Lm - 10800 Lm

Beam angle

40°

CRI

>80



Fotometria del Prodotto

Photometric curve of the product


INC-APOLLO-1X10


INC-APOLLO-1X20


INC-APOLLO-1X30


INC-APOLLO-1X45


INC-APOLLO-2X10*


INC-APOLLO-2X20*


INC-APOLLO-2X30*


INC-APOLLO-2X45*


INC-APOLLO-3X10*


INC-APOLLO-3X20*


INC-APOLLO-3X30*


INC-APOLLO-3X45*

** Le curve fotometriche sopra indicate rappresentano il singolo modulo LED per ogni elemento*
** Above photometric curve represent the single module of each element*



INC-APOLLO-1X10C 8031440360623	10W	800 LM		INC-APOLLO-1X30C 8031440360753	30W	2400 LM	PF 0.90
INC-APOLLO-1X10M 8031440360630	10W	800 LM		INC-APOLLO-1X30M 8031440360760	30W	2400 LM	PF 0.90
INC-APOLLO-1X20C 8031440360692	20W	1600 LM		INC-APOLLO-1X45C 8031440360777	45W	3600 LM	PF 0.90
INC-APOLLO-1X20M 8031440360708	20W	1600 LM		INC-APOLLO-1X45M 8031440360784	45W	3600 LM	PF 0.90

Potenza - power: 10W | 20W | 30W - 45W

Foro - cut out
dimensioni in mm - size mm



Misure - Size
dimensioni in mm - size mm





INC-APOLLO-2X10C 8031440360647	2X10W	1600 LM		INC-APOLLO-2X30C 8031440360791	2X30W	4800 LM	PF 0.90
INC-APOLLO-2X10M 8031440360654	2X10W	1600 LM		INC-APOLLO-2X30M 8031440360807	2X30W	4800 LM	PF 0.90
INC-APOLLO-2X20C 8031440360715	2X20W	3200 LM		INC-APOLLO-2X45C 8031440360814	2X45W	7200 LM	PF 0.90
INC-APOLLO-2X20M 8031440360722	2X20W	3200 LM		INC-APOLLO-2X45M 8031440360821	2X45W	7200 LM	PF 0.90

Potenza - power: 2x10W | 2x20W | 2x30W - 2x45W

Foro - cut out
dimensioni in mm - size mm



Misure - Size
dimensioni in mm - size mm





INC-APOLLO-3X10C 8031440360661	3X10W	2400 LM		INC-APOLLO-3X30C 8031440360845	3X30W	7200 LM	PF 0.90
INC-APOLLO-3X10M 8031440360678	3X10W	2400 LM		INC-APOLLO-3X30M 8031440360838	3X30W	7200 LM	PF 0.90
INC-APOLLO-3X20C 8031440360746	3X20W	4800 LM		INC-APOLLO-3X45C 8031440360852	3X45W	10800 LM	PF 0.90
INC-APOLLO-3X20M 8031440360739	3X20W	4800 LM		INC-APOLLO-3X45M 8031440360869	3X45W	10800 LM	PF 0.90

Potenza - power: 3x10W | 3x20W | 3x30W - 3x45W

Foro - cut out
dimensioni in mm - size mm



Misure - Size
dimensioni in mm - size mm



OUTSIDER

Incasso antiriflesso luce spot con testa estraibile e orientabile

Materiale
Alluminio

Colore
Bianco matto con bordatura interna nera

Sorgente luminosa
LED COB 15W - 30W

Driver
incluso

Temperatura colore
3000K - 4000K

Punti luce
1 - 2 - 3

Flusso luminoso
1200 Lm - 2400 Lm - 4800 Lm - 3600 Lm - 7200 Lm

Angolo di luce
24°

CRI
>80

Antiglare recess spot light with extractable orientable head

Material
Alluminium

Colour
Matt white color and black internal ring

Light source
LED COB 15W - 30W

Driver
included

Colour temperature
3000K - 4000K

Number of light sources
1 - 2 - 3

Luminous flux
1200 Lm - 2400 Lm - 4800 Lm - 3600 Lm - 7200 Lm

Beam angle
24°

CRI
>80







Fotometria del Prodotto

Photometric curve of the product


INC-OUTSIDER-1X15


INC-OUTSIDER-1X30


INC-OUTSIDER-2X15


INC-OUTSIDER-2X30


INC-OUTSIDER-3X15


INC-OUTSIDER-3X30

** Le curve fotometriche sopra indicate rappresentano il singolo modulo LED per ogni elemento*

** Above photometric curve represent the single module of each element*



INC-OUTSIDER-1X15C 8031414864225	15W	1200 LM	
INC-OUTSIDER-1X15M 8031414864119	15W	1200 LM	
INC-OUTSIDER-1X30C 8031414864256	30W	2400 LM	PF 0.90
INC-OUTSIDER-1X30M 8031414864133	30W	2400 LM	PF 0.90

Potenza - power: 1X15W | 1X30W

Foro - cut out
dimensioni in mm - size mm





Misure - Size
dimensioni in mm - size mm







INC-OUTSIDER-2X15C 8031414864232	2X15W	2400 LM	
INC-OUTSIDER-2X15M 8031414864126	2X15W	2400 LM	
INC-OUTSIDER-2X30C 8031414864263	2X30W	4800 LM	PF 0.90
INC-OUTSIDER-2X30M 8031414864140	2X30W	4800 LM	PF 0.90

Potenza - power: 2X15W | 2X30W

Foro - cut out
dimensioni in mm - size mm





Misure - Size
dimensioni in mm - size mm







INC-OUTSIDER-3X15C 8031414864249	3X15W	3600 LM	
INC-OUTSIDER-3X15M 8031414864102	3X15W	3600 LM	
INC-OUTSIDER-3X30C 8031414864270	3X30W	7200 LM	PF 0.90
INC-OUTSIDER-3X30M 8031414864157	3X30W	7200 LM	PF 0.90

Potenza - power: 3X15W | 3X30W

Foro - cut out
dimensioni in mm - size mm





Misure - Size
dimensioni in mm - size mm





DELTA

Faro incasso luce spot con testa estraibile e orientabile

Recess spot light with exstractable head orientability



Materiale
Alluminio

Material
Alluminium

Colore
Bianco satinato riflettore silver

Color
Satin white and silver reflector

Sorgente luminosa
LED COB 20W - 30W

Light source
LED COB 8W - 20W - 33W

Driver
incluso

Driver
included

Temperatura colore
3000K - 4000K

Colour temperature
3000K - 4000K

Punti luce
1

Number of light sources
1

Flusso luminoso
2600 Lm - 3900 Lm

Luminous flux
2600 Lm - 3900 Lm

Angolo di luce
24°

Beam angle
24°



INC-DELTA-20M 8031414883530		**2600 LM**	
INC-DELTA-20C 8031414883523		**2600 LM**	

Foro - cut out
dimensioni in mm - size mm



Misure - Size
dimensioni in mm - size mm



Fotometria del Prodotto

Photometric curve of the product



INC-DELTA-20



INC-DELTA-30M 8031414883288		**3900 LM**	PF 0,90	
INC-DELTA-30C 8031414883271		**3900 LM**	PF 0,90	

Foro - cut out
dimensioni in mm - size mm



Misure - Size
dimensioni in mm - size mm



Fotometria del Prodotto

Photometric curve of the product



INC-DELTA-33

DELTA

Faro incasso luce spot con testa estraibile e orientabile

Recess spot light with exstractable head orientability



Materiale
Alluminio

Material
Alluminium

Colore
Bianco satinato riflettore silver

Color
Satin white and silver reflector

Sorgente luminosa
LED COB 30W

Light source
LED COB 30W

Driver
incluso

Driver
included

Temperatura colore
2500K - 3000K - 3100K

Color temperature
2500K - 3000K - 3100K

Flusso luminoso
3000 LM
2400 LM
2180 LM
3250 LM

Luminous flux
3000 LM
2400 LM
2180 LM
3250 LM

Angolo di luce
24°

Beam angle
24°





INC-DELTA-30BR 8031414883417	**2500K**	**3000 LM**	PF 0,90	**CRI** >90



INC-DELTA-30RM 8031414883448	**3100K**	**2400 LM**	PF 0,90	**CRI** >70



INC-DELTA-30FM 8031414883424	**3000K**	**2180 LM**	PF 0,90	**CRI** >60-63



INC-DELTA-30FR 8031414883431	**3000K**	**3250 LM**	PF 0,90	**CRI** >95

Foro - cut out
dimensioni in mm - size mm



Misure - Size
dimensioni in mm - size mm



LYBRA

Faro ad incasso con orientabilità verticale

Recess spot light vertical orientability



Materiale
Alluminio

Material
Alluminium

Colore
Bianco satinato riflettore silver

Colour
Satin white and silver reflector

Sorgente luminosa
LED COB 30W

Light source
LED COB 30W

Driver
incluso

Driver
included

Temperatura colore
3200K

Colour temperature
3200K

Punti luce
1

Number of light sources
1

Lumen
1600 Lm

Luminous flux
1600 Lm

Angolo di luce
99°

Beam angle
99°

CRI
>80

CRI
>80







INC-LYBRA-30			
8031434951226	30W	1600 LM	PF 0,90

Foro - cut out
dimensioni in mm - size mm



Misure - Size
dimensioni in mm - size mm



Fotometria del Prodotto

Photometric curve of the product



INC-LYBRA-30

FIBRA OTTICA

Kit fibra ottica

LED optical fiber kit

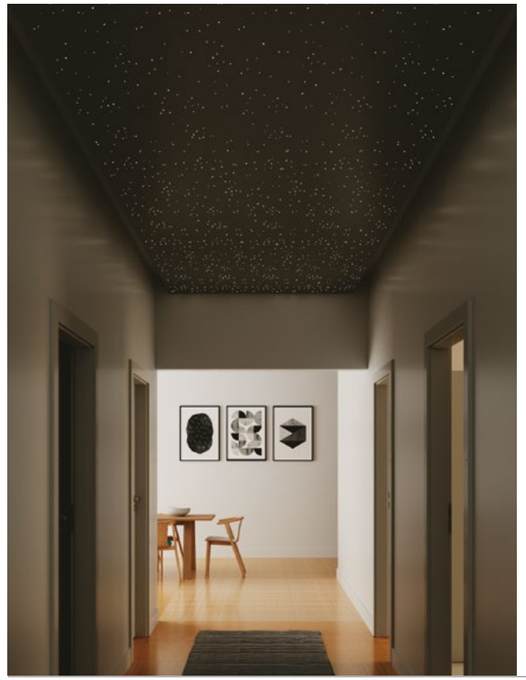

Materiale
Fibra ottica traslucente

Material
Translucent optical fiber

Sorgente luminosa
16W

Light source
16W

Driver
incluso

Driver
included

Temperatura colore
RGB + 4000K

Color temperature
RGB + 4000K

Punti luce
100

Number of light sources
100

Dimmer
Dimmerabile con radiocomando

Dimmer
Dimmable with remote control

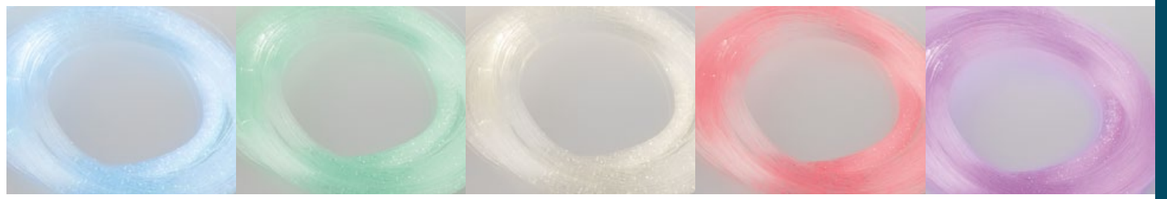



FIBRAOTTICA-LED-RGB
8031436691236

Misure - Size
dimensioni in mm - size mm



Accessori inclusi
included accessories

Driver
Radio controller



STARLIGHT

Mini faretto a incasso cielo stellato
con doppia ghiera di colore bianco o silver
intercambiabile

Downlight for decorative starlight with double
interchangeable ring color white or silver



Materiale
Alluminio

Material
Alluminium

Colore
Bianco, argento

Colour
White, silver

Sorgente luminosa
LED 0,2W

Light source
LED 0,2W

Driver
NON INCLUSO

Driver
NOT INCLUDED

Temperatura colore
4000K, BLU

Colour temperature
4000K, BLU

Punti luce
1

Number of light sources
1

Flusso luminoso
11 Lm

Luminous flux
11 Lm

CRI
>80

CRI
>80

LED-STARLIGHT-W 8031440361682		**11 LM**	**INCL. CAVO 1 M. WITH 1M. CABLE**
LED-STARLIGHT-BLU 8031440361699			**INCL. CAVO 1 M. WITH 1M. CABLE**



GHIERA SILVER INTERCAMBIABILE INCLUSE
SILVER CHANGEABLE RING INCLUDED

GHIERA BIANCA INTERCAMBIABILE INCLUSE
SILVER CHANGEABLE RING INCLUDED

Foro - cut out
dimensioni in mm - size mm



Misure - Size
dimensioni in mm - size mm



CONNESSIONE IN PARALLELO
PARALLEL CONNECTION

Fotometria del Prodotto

Photometric curve of the product



LED-STARLIGHT 0,2W

ACCESSORI STARLIGHT non inclusi



LED-STARLIGHT-NEX
8031440364430

SCATOLA CONNESSIONE PER 10 TESTE 12V DC 1A INCL. CAVO 1 M.
BOX CONNECTION FOR 10 PCS 12V DC 1A WITH 1MT. CABLE



LED-STARLIGHT-CONN
8031440364843

CONNETTORE CON SINGOLA ENTRATA 3 USCITE PER KIT CIELO STELLATO 12V DC 1A INCL. CAVO 1 M.
CONNECTOR ONE INPUT THREE OUTPUT FOR STARLIGHT 12V DC 1A WITH 1M CABLE



LED-STARLIGHT-DR
8031440364447

DRIVER 12V DC 100MA 6W INCL. CAVO 1 M.

STARLIGHT 30

Kit 30 mini faretti a incasso cielo stellato
con doppia ghiera di colore bianco o silver
intercambiabile

Kit 30 downlight for decorative starlight with
double interchangeable ring color white or silver



Materiale
Alluminio

Material
Alluminium

Sorgente luminosa
LED 30x0,2W

Light source
LED 30x0,2W

Driver
Driver 12V DC 100mA 6W

Driver
Driver 12V DC 100mA 6W

Temperatura colore
4000K

Colour temperature
4000K

Punti luce
30

Number of light sources
30

Flusso luminoso
30x11Lm

Luminous flux
30x11Lm

CRI
>80

CRI
>80

LED-STARLIGHT-30-W 8031440357692		**330 LM**	**INCL. CAVO 1 M. WITH 1MT. CABLE**



GHIERE SILVER INTERCAMBIABILI INCLUSE
SILVER CHANGEABLE RINGS INCLUDED

GHIERE BIANCHE INTERCAMBIABILI INCLUSE
SILVER CHANGEABLE RINGS INCLUDED









Accessori inclusi

3 SCATOLE CONNESSIONE PER 10 TESTE 12V DC 1A INCL. CAVO 1 M.
3 BOX CONNECTION FOR 10 PCS 12V DC 1A WITH 1MT. CABLE

1 CONNETTORE CON SINGOLA ENTRATA 3 USCITE PER KIT CIELO STELLATO 12V DC 1A INCL. CAVO 1M
1 CONNECTOR ONE INPUT THREE OUTPUT FOR STARLIGHT 12V DC 1A WITH 1M CABLE

1 DRIVER 12V DC 100MA 6W INCL. CAVO 1 M
1 DRIVER 12V DC 100MA 6W WITH 1M CABLE

Fotometria del Prodotto

Photometric curve of the product



LED-STARLIGHT 0,2W

Foro - cut out
dimensioni in mm - size mm



Misure - Size
dimensioni in mm - size mm



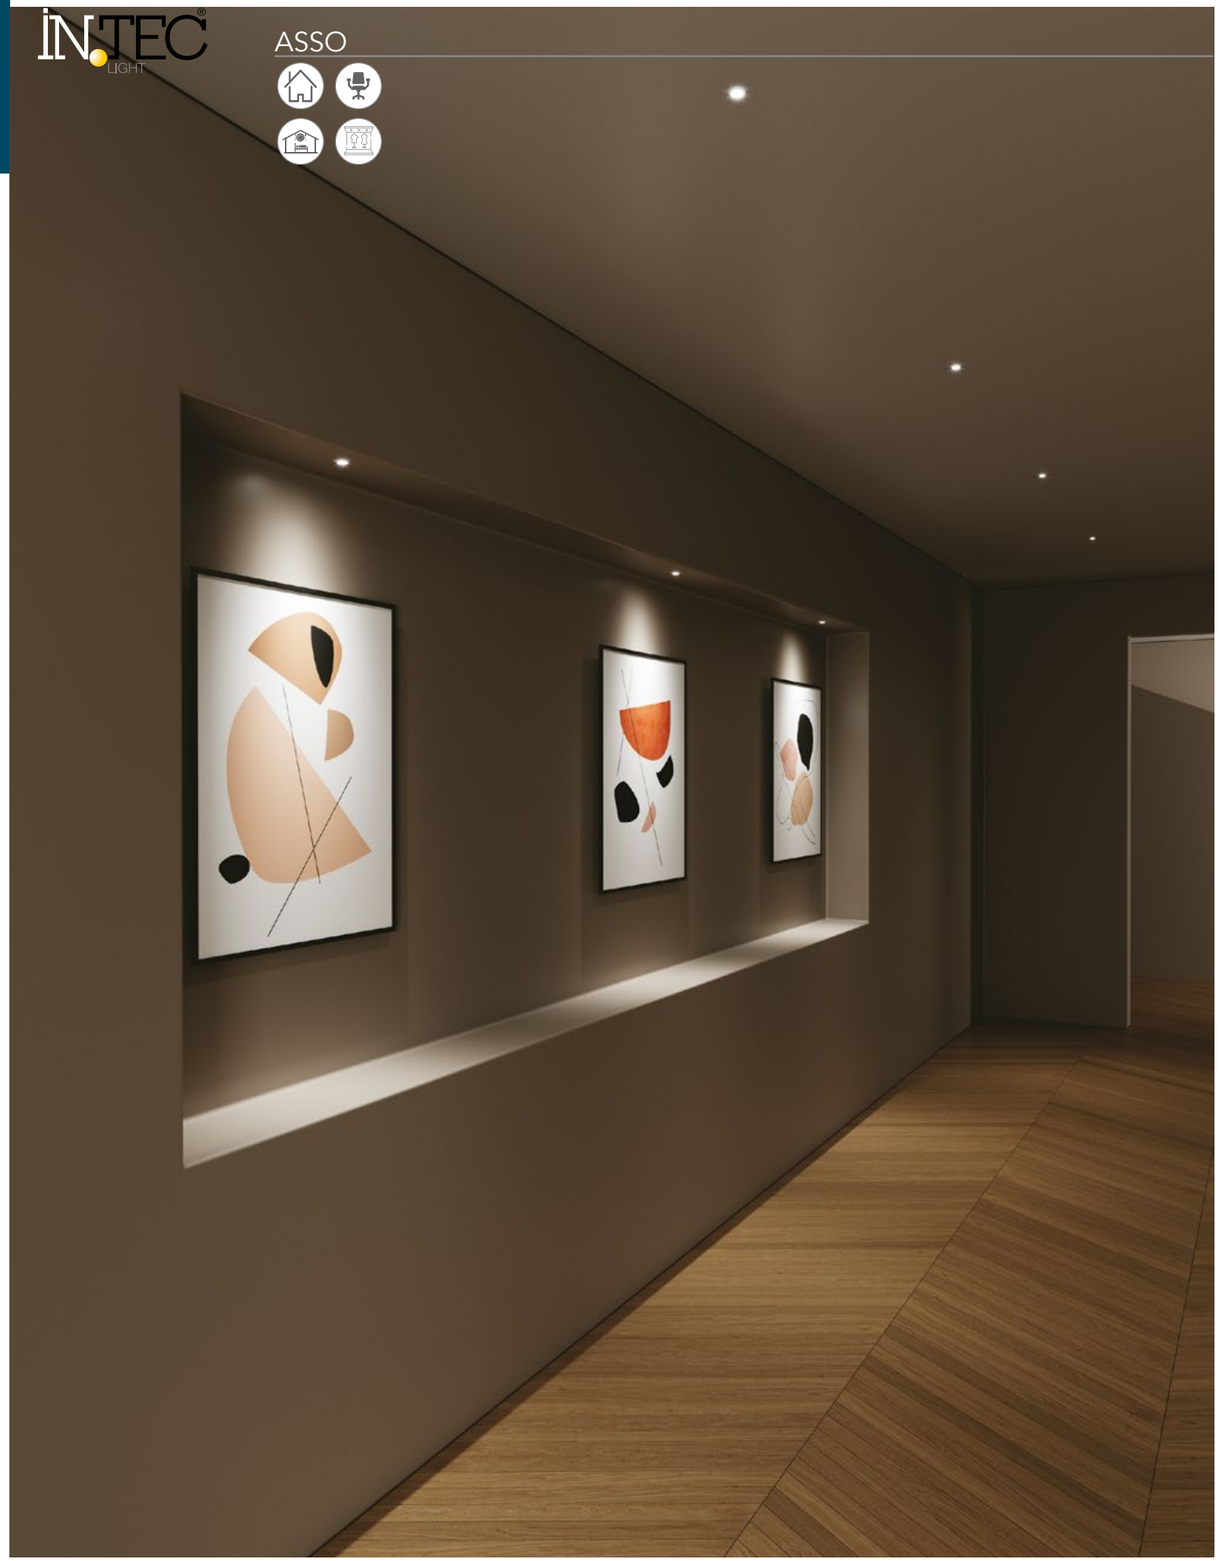

ASSO KIT 3

Kit 3 faretti incasso

3 reccessed light kit



Materiale
Alluminio

Material
Aluminium

Colore
Silver

Colour
Silver

Sorgente luminosa
LED 3x1W

Light source
LED 3x1W

Driver
incluso

Driver
included

Temperatura colore
4000K

Colour temperature
4000K

Punti luce
3

Number of light sources
3

Flusso luminoso
3x80Lm

Luminous flux
3x80Lm

Angolo di luce
30°

Beam angle
30°

CRI
>80

CRI
>80



INC-ASSO-Q3 8031414881628	3X80 LM	KIT 3 PZ KIT 3 PCS	DRIVER INCLUSO* *DRIVER ICLUDED**
INC-ASSO-R3 8031414881611	3X80 LM	KIT 3 PZ KIT 3 PCS	DRIVER INCLUSO* *DRIVER ICLUDED**

Fotometria del Prodotto

Photometric curve of the product



Modello	R	Q
Foro - cut out dimensioni in mm - size mm	Ø 25	Ø 25
Misure - Size dimensioni in mm - size mm	22 Ø 32	22 32x32

Accessori inclusi

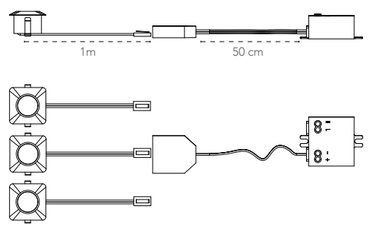

ASSO

Faretto incasso

Recessed light



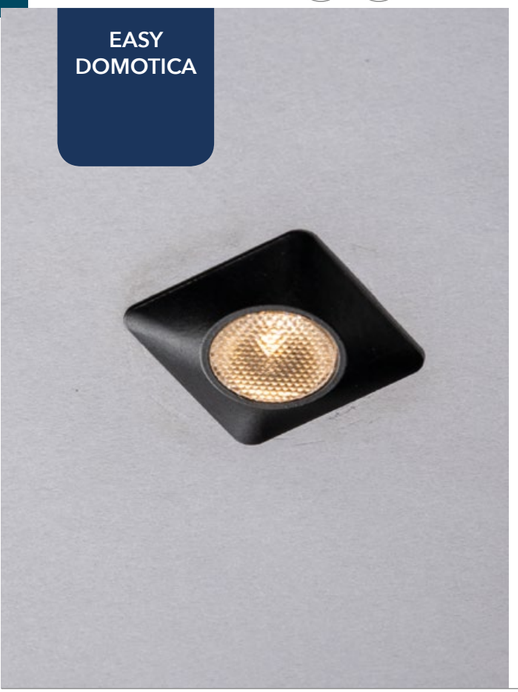

Materiale
Alluminio

Material
Aluminium

Colore
Bianco - Nero

Colour
White - Black

Sorgente luminosa
LED 1W

Light source
LED 1W

Driver
DC 24V tensione costante
non incluso

Driver
DC24V costant voltage
not included

Temperatura colore
3000K 4000K

Colour temperature
3000K 4000K

Flusso luminoso
80 Lm

Luminous flux
80 Lm

Angolo di luce
30°

Beam angle
30°

CRI
>80

CRI
>80



INC-ASSO-Q30M 8031414881659		**80 LM**	
INC-ASSO-Q30C 8031414881642		**80 LM**	
INC-ASSO-Q30M-NER 8031414881673		**80 LM**	
INC-ASSO-Q30C-NER 8031414881666		**80 LM**	

Fotometria del Prodotto

Photometric curve of the product



Foro - cut out
dimensioni in mm - size mm



Accessori inclusi

Misure - Size
dimensioni in mm - size mm





Connessione in parallelo
Parallel connection system

Driver pag. 701

Controller pag. 708



ASSO

Faretto incasso

Recessed light



Materiale
Alluminio

Material
Aluminium

Colore
Bianco - Nero

Colour
White - Black

Sorgente luminosa
LED 1W

Light source
LED 1W

Driver
DC 24V tensione costante
non incluso

Driver
DC24V costant voltage
not included

Temperatura colore
3000K 4000K BLU

Colour temperature
3000K 4000K BLU

Flusso luminoso
80 Lm

Luminous flux
80 Lm

Angolo di luce
30°

Beam angle
30°

CRI
>80

CRI
>80



INC-ASSO-R30M 8031414877928		**80 LM**	
INC-ASSO-R30C 8031414877829		**80 LM**	
INC-ASSO-R30-BLU 8031414877935		--	
INC-ASSO-R30M-NER 8031414881680		**80 LM**	
INC-ASSO-R30C-NER 8031414881635		**80 LM**	

Fotometria del Prodotto

Photometric curve of the product



Foro - cut out
dimensioni in mm - size mm



Accessori inclusi

Misure - Size
dimensioni in mm - size mm





Connessione in parallelo
Parallel connection system

Driver pag. 701

Controller pag. 708





DAMA

Faretto incasso con doppia ghiera intercambiabile rotonda o quadrata

Recessed light with double interchangeble ring round or square



Materiale
PC

Material
PC

Colore
Bianco - Nero

Colour
White - Black

Sorgente luminosa
LED 3W

Light source
LED 3W

Driver
integrato

Driver
built-in

Temperatura colore
4000K

Colour temperature
4000K

Flusso luminoso
240Lm

Luminous flux
240Lm

Angolo di luce
100°

Beam angle
100°

CRI
>80

CRI
>80



INC-DAMA-QR44-BCO 8031414881581	3W	240 LM	
INC-DAMA-QR44-NER 8031414881598	3W	240 LM	

Foro - cut out
dimensioni in mm - size mm



Misure - Size
dimensioni in mm - size mm



Fotometria del Prodotto

Photometric curve of the product



Accessori inclusi

Cavo 30 cm
30 cm cable



Ghiere intercambiabili
Interchangeable ring



SINKRO

Incasso lineare antiriflesso in alluminio pressofuso

Die-cust aluminium anti-glare linear down-light



Materiale
Alluminio pressofuso

Material
Diecast aluminium

Colore finitura
Bordo bianco e interno nero lucido

Finiture colour
White and glossy black inside

Sorgente luminosa
LED COB 2W, 5x2W, 10x2W

Light source
LED COB 2W, 5x2W, 10x2W

Driver
incluso

Driver
included

Temperatura colore
4000K

Colour temperature
4000K

Punti luce
1 - 5 - 10

Number of light sources
1 - 5 - 10

Flusso luminoso
160 Lm - 800 Lm - 1600 Lm

Luminous flux
160 Lm - 800 Lm - 1600 Lm

Angolo di luce
45°

Beam angle
45°

CRI
>80

CRI
>80





Fotometria del Prodotto

Photometric curve of the product



INC-SINKRO-2M



INC-SINKRO-10M



INC-SINKRO-20M



INC-SINKRO-2M
8031440360876
2W 160 LM

Misure - Size
dimensioni in mm - size mm



Foro - cut out
dimensioni in mm - size mm





INC-SINKRO-10M
8031440360890
5X2W 800 LM

Misure - Size
dimensioni in mm - size mm



Foro - cut out
dimensioni in mm - size mm





INC-SINKRO-20M
8031440360906
10X2W 1600 LM

Misure - Size
dimensioni in mm - size mm



Foro - cut out
dimensioni in mm - size mm



ELITE

Incasso antiriflesso luce spot orientabile

Orientable recessed spot light anti-glare



Materiale
Alluminio

Material
Alluminium

Colore
Bianco goffrato

Colour
Embossed white

Sorgente luminosa
LED COB 10W - 20W - 30W - 45W

Light source
COB LED 10W - 20W - 30W - 45W

Driver
incluso

Driver
included

Temperatura colore
3000K - 4000K

Colour temperature
3000K - 4000K

Punti luce
1

Number of light sources
1

Flusso luminoso
800 Lm - 1600 Lm - 2400 Lm - 3600Lm

Luminous flux
80 Lm - 1600 Lm - 2400 Lm - 3600Lm

Angolo di luce
40°

Beam angle
40°

CRI
>80

CRI
>80

Fotometria del Prodotto

Photometric curve of the product


INC-ELITE-1X10


INC-ELITE-1X20


INC-ELITE-1X30


INC-ELITE-1X45





INC-ELITE-1X10C 8031440363396	10W	800 LM	
INC-ELITE-1X10M 8031440363365	10W	800 LM	
INC-ELITE-1X20C 8031440363372	20W	1600 LM	
INC-ELITE-1X20M 8031440363341	20W	1600 LM	

Potenza - power	10W	20W
Foro - cut out dimensioni in mm - size mm		
Misure - Size dimensioni in mm - size mm		





INC-ELITE-1X30C 8031440363358	30W	2400 LM	PF 0,90
INC-ELITE-1X30M 8031440363327	30W	2400 LM	PF 0,90
INC-ELITE-1X45C 8031440363334	45W	3600 LM	PF 0,90
INC-ELITE-1X45M 8031440363303	45W	3600 LM	PF 0,90

Potenza - power	30W	45W
Foro - cut out dimensioni in mm - size mm		
Misure - Size dimensioni in mm - size mm		

LANDER

Incasso in alluminio anti abbagliamento

Materiale
Alluminio

Colore
Bianco con riflettore cromato
Nero con riflettore nero lucido

Sorgente luminosa
LED COB 15W - 30W

Driver
incluso

Temperatura colore
4000K - 3000K

Punti luce
1

UGR
<19

Flusso luminoso
1500 Lm - 3000 Lm

Durata e on/off
50.000 h ~ >25.000 on/off

Angolo di luce
35°

CRI
90

Alluminium down light anti-glare

Material
Alluminium

Colour
White with chrome reflector
Black with shine black reflector

Light source
LED COB 15W - 30W

Driver
included

Colour temperature
4000K - 3000K

Number of light sources
1

UGR
<19

Luminous flux
1500 Lm - 3000 Lm

Life time and on/off
50.000 h ~ >25.000 on/off

Beam angle
35°

CRI
90





Fotometria del Prodotto

Photometric curve of the product


INC-LANDER-Q 15W


INC-LANDER-Q 30W


INC-LANDER-R 15W


INC-LANDER-R 30W

LANDER





INC-LANDER-Q15 BCO 8031414866625			15W	1500 LM			
INC-LANDER-Q15 NER 8031414866465			15W	1500 LM			
INC-LANDER-Q30 BCO 8031414866601			30W	3000 LM	PF 0,90		
INC-LANDER-Q30 NER 8031414866618			30W	3000 LM	PF 0,90		

INC-LANDER-Q15C BCO 8031414874040			15W	1500 LM			
INC-LANDER-Q15C NER 8031414874002			15W	1500 LM			
INC-LANDER-Q30C BCO 8031414873999			30W	3000 LM	PF 0,90		
INC-LANDER-Q30C NER 8031414873982			30W	3000 LM	PF 0,90		

Potenza - power — 15W — 30W

Foro - cut out
dimensioni in mm - size mm





Misure - Size
dimensioni in mm - size mm









INC-LANDER-R15 BCO 8031414866564			15W	1500 LM			
INC-LANDER-R15 NER 8031414866434			15W	1500 LM			
INC-LANDER-R30 BCO 8031414866540			30W	3000 LM	PF 0,90		
INC-LANDER-R30 NER 8031414866595			30W	3000 LM	PF 0,90		

INC-LANDER-R15C BCO 8031414869053			15W	1500 LM			
INC-LANDER-R15C NER 8031414873944			15W	1500 LM			
INC-LANDER-R30C BCO 8031414873937			30W	3000 LM	PF 0,90		
INC-LANDER-R30C NER 8031414873920			30W	3000 LM	PF 0,90		

Potenza - power — 15W — 30W

Foro - cut out
dimensioni in mm - size mm





Misure - Size
dimensioni in mm - size mm





XANTO

Incasso in alluminio pressofuso antiriflesso

Diecast aluminium anti-glare down-light



Materiale

Alluminio pressofuso

Colore

Bianco satinato

Sorgente luminosa

LED SMD 12W - 18W - 30W

Driver

incluso

Temperatura colore

4000K - 5000K - 3000K

Punti luce

1

Flusso luminoso

960 Lm - 980 Lm - 1000 Lm
1500 Lm - 1550Lm - 1600 Lm
2700 Lm - 2800 Lm - 2900 Lm

Angolo di luce

98°

CRI

>80

Material

Die cast alluminium

Colour

Satin white color

Light source

LED SMD 12W - 18W - 30W

Driver

included

Colour temperature

4000K - 5000K - 3000K

Number of light sources

1

Luminous flux

960 Lm - 980 Lm - 1000 Lm
1500 Lm - 1550Lm - 1600 Lm
2700 Lm - 2800 Lm - 2900 Lm

Beam angle

98°

CRI

>80

Fotometria del Prodotto

Photometric curve of the product



INC-XANTO-F-R120



INC-XANTO-F-R154



INC-XANTO-F-R220



INC-XANTO-M-R120 8031414861224		12W	980 Lm
INC-XANTO-F-R120 8031414861163		12W	1000 Lm
INC-XANTO-C-R120 8031414861101		12W	960 Lm

Misure - Size
dimensioni in mm - size mm



Foro - cut out
dimensioni in mm - size mm





INC-XANTO-M-R154 8031414861231		18W	1550 Lm
INC-XANTO-F-R154 8031414861170		18W	1600 Lm
INC-XANTO-C-R154 8031414861118		18W	1500 Lm

Misure - Size
dimensioni in mm - size mm



Foro - cut out
dimensioni in mm - size mm





INC-XANTO-M-R220 8031414861248		30W	2800 Lm	PF 0,90
INC-XANTO-F-R220 8031414861187		30W	2900 Lm	PF 0,90
INC-XANTO-C-R220 8031414861125		30W	2700 Lm	PF 0,90

Misure - Size
dimensioni in mm - size mm



Foro - cut out
dimensioni in mm - size mm



XANTO-INT

Incasso in alluminio pressofuso con funzione smart Wi-Fi, RF2.4G compatibili con dispositivi VOICE CONTROL

Diecast aluminium down light with smart Wi-Fi function, RF2.4G compatible with VOICE CONTROL devices

Materiale
Alluminio pressofuso

Material
Die cast alluminium

Sorgente luminosa
LED RGB+CCT 12W - 30W

Light source
LED RGB+CCT 12W - 30W



Driver
incluso

Driver
included

Temperatura colore

Color temperature

Punti luce
1

Light spot
1

Flusso
810-900 Lm - 1632-1944 Lm

Luminous flux
810-900 Lm - 1632-1944 Lm

Angolo di luce
98°

Light angle
98°

CRI
>80

CRI
>80



INC-XANTO-R120-INT 8031414872695	**12W 810-900LM**	
INC-XANTO-R220-INT 8031414868643	**30W 1632-1944 LM**	PF 0,90

non incluso - not included



RADIOCOMANDO-RF 8031414872725	Radiocomando RF 2.4G - controllo gruppi *RF 2.4G remote control - control groups*

CONTROL SYSTEM
EASY INSTALLATION

SMART INTEC

Powered by tuya Intelligence Inside

Smart Life

VOICE CONTROL
ALEXA E GOOGLE HOME

RF 2.4G
CONTROL
SYSTEM

non incluso
not *included*

Potenza - power	12W	30W
Foro - cut out dimensioni in mm - size mm	Ø 110	Ø 200
Misure - Size dimensioni in mm - size mm	47 Ø 120	55 Ø 220

Fotometria del Prodotto

Photometric curve of the product



INC-XANTO-R120-INT



INC-XANTO-R220-INT



XANTO

Incasso in alluminio pressofuso antiriflesso



Materiale

Alluminio pressofuso

Colore

Bianco satinato

Sorgente luminosa

LED SMD 12W - 18W - 30W

Driver

incluso

Temperatura colore

3000K - 4000K - 5000K

Punti luce

1

Flusso luminoso

960 Lm - 980 Lm - 1000 Lm
1500 Lm - 1550Lm - 1600 Lm
2700 Lm - 2800 Lm - 2900 Lm

Angolo di luce

98°

CRI

>80

Diecast aluminium anti-glare down-light

Material

Die cast alluminium

Colour

Satin white color

Light source

LED SMD 12W - 18W - 30W

Driver

included

Colour temperature

3000K - 4000K - 5000K

Number of light sources

1

Luminous flux

960 Lm - 980 Lm - 1000 Lm
1500 Lm - 1550Lm - 1600 Lm
2700 Lm - 2800 Lm - 2900 Lm

Beam angle

98°

CRI

>80

Fotometria del Prodotto

Photometric curve of the product



INC-XANTO-F-Q120



INC-XANTO-F-Q145



INC-XANTO-F-Q220



INC-XANTO-M-Q110 8031414861194		12W	980 Lm
INC-XANTO-F-Q110 8031414861132		12W	1000 Lm
INC-XANTO-C-Q110 8031414861071		12W	960 Lm

Misure - Size
dimensioni in mm - size mm



Foro - cut out
dimensioni in mm - size mm





INC-XANTO-M-Q145 8031414861200		18W	1550 Lm
INC-XANTO-F-Q145 8031414861149		18W	1600 Lm
INC-XANTO-C-Q145 8031414861088		18W	1500 Lm

Misure - Size
dimensioni in mm - size mm



Foro - cut out
dimensioni in mm - size mm



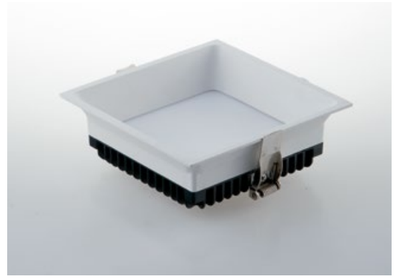

INC-XANTO-M-Q220 8031414861217		30W	2800 Lm	PF 0,90
INC-XANTO-F-Q220 8031414861156		30W	2900 Lm	PF 0,90
INC-XANTO-C-Q220 8031414861095		30W	2700 Lm	PF 0,90

Misure - Size
dimensioni in mm - size mm



Foro - cut out
dimensioni in mm - size mm



MACK

Incasso in policarbonato anti abbagliamento

Diecast polycarbonate anti-glare down-light



Materiale
PC

Material
PC

Colore
Bianco con riflettore cromato

Colour
White with chrome reflector

Sorgente luminosa
LED SMD 15W - 20W - 25W

Light source
LED SMD 15W - 20W - 25W

Driver
integrato

Driver
built-in

Temperatura colore
3000K - 4000K

Colour temperature
3000K - 4000K

Punti luce
1

Number of light sources
1

UGR
<19

UGR
<19

Flusso luminoso
1350 Lm - 1800 Lm - 2250 Lm
1500 Lm - 2000 Lm - 2500 Lm

Luminous flux
1350 Lm - 1800 Lm - 2250 Lm
1500 Lm - 2000 Lm - 2500 Lm

Angolo di luce
75°

Beam angle
75°

CRI
>80

CRI
>80

Fotometria del Prodotto

Photometric curve of the product


INC-MACK 15W


INC-MACK 20W


INC-MACK 25W



INC-MACK-15 8031414867974	15W	1500 Lm	UGR<19
INC-MACK-15C 8031414873913	15W	1350 Lm	UGR<19

Misure - Size
dimensioni in mm - size mm



Foro - cut out
dimensioni in mm - size mm





INC-MACK-20 8031414867981	20W	2000 Lm	UGR<19
INC-MACK-20C 8031414873906	20W	1800 Lm	UGR<19

Misure - Size
dimensioni in mm - size mm



Foro - cut out
dimensioni in mm - size mm





INC-MACK-25 8031414867998	25W	2500 Lm	UGR<19
INC-MACK-25C 8031414873890	25W	2250 Lm	UGR<19

Misure - Size
dimensioni in mm - size mm



Foro - cut out
dimensioni in mm - size mm



TRON

Incasso con interruttore per regolazione kelvin

Materiale
Struttura in alluminio diffusore in acrilico

Colore finitura
Bianco opaco

Sorgente luminosa
LED SMD 7W - 20W - 30W

UGR
<19

Driver
incluso

Temperatura colore selezionabile
4000K - 6000K - 3000K

Punti luce
1

Flusso luminoso
770 Lm - 2200 Lm - 3280 Lm

Angolo di luce
120°

CRI
>85

Recessed light with switch for kelvin adjustment

Material
Alluminium structure , acrylic diffuser

Finiture colour
Matt white

Light source
LED SMD 7W - 20W - 30W

UGR
<19

Driver
included

Selectable color temperature
4000K - 6000K - 3000K

Number of light sources
1

Luminous flux
770 Lm - 2200 Lm - 3280 Lm

Beam angle
120°

CRI
>85





Fotometria del Prodotto

Photometric curve of the product


INC-TRON-7


INC-TRON-20


INC-TRON-30



INC-TRON-7
8031414876198
7W 770 LM

Misure - Size
dimensioni in mm - size mm



Foro - cut out
dimensioni in mm - size mm





INC-TRON-20
8031414876204
20W 2200 LM PF 0,90

Misure - Size
dimensioni in mm - size mm



Foro - cut out
dimensioni in mm - size mm





INC-TRON-30
8031414876211
30W 3280 LM PF 0,90

Misure - Size
dimensioni in mm - size mm



Foro - cut out
dimensioni in mm - size mm



BLINK-EYES

Incasso in policarbonato con funzione smart bluetooth

Smart bluetooth diecast polycarbonate down-light



Materiale
Policarbonato

Colore
Bianco matto

Sorgente luminosa
LED SMD 9W

Driver
Integrato

Temperatura colore
RGB + CCT
CCT

Punti luce
1

Flusso luminoso CCT
700Lm 740Lm 750Lm

Angolo di luce
96°

CRI
>80

Material
Polycarbonate

Colour
Matt white

Light source
LED SMD 9W

Driver
Built-in

Colour temperature
RGB + CCT
CCT

Number of light sources
1

Luminous Flux CCT
700Lm 740Lm 750Lm

Beam angle
96°

CRI
>80





INC-EYES-BT 8031414877881	9W	CCT
INC-BLINK-BT 8031414877911	9W	RGB CCT

Foro - cut out
dimensioni in mm - size mm



Misure - Size
dimensioni in mm - size mm



Fotometria del Prodotto

Photometric curve of the product



INC-EYES-BT



INC-BLINK-BT

SLIM-INT

Incasso in alluminio pressofuso con funzione smart Wi-Fi, RF2,4G compatibili con dispositivi VOICE CONTROL

Diecast aluminium down light with smart Wi-Fi function, RF2,4G compatible with VOICE CONTROL

Materiale
Struttura in alluminio diffusore in acrilico

Colore
Bianco satinato

Sorgente luminosa
LED SMD 6W - 18W

Driver
incluso

Temperatura colore
RGB + CCT

Punti luce
1

Flusso
310-350 Lm - 643-794 Lm

Angolo di luce
120°

CRI
>80

Material
Alluminium structure , acrylic diffuser

Colour
Satin white

Light source
LED SMD 6W - 18W

Driver
included

Color temperature
RGB + CCT

Light spot
1

Luminous flux
310-350 Lm - 643-794 Lm

Light angle
120°

CRI
>80





INC-SLIM/6W-INT 8031414872701	6W 310-350LM
INC-SLIM/18W-INT 8031414868612	18W 643-794 LM

non incluso - not included



RADIOCOMANDO-RF 8031414872725	Radiocomando RF 2.4G - controllo gruppi *RF 2.4G remote control - control groups*





Potenza	6W	18W
Foro dimensioni in mm	 Ø 105	 Ø 210
Misure dimensioni in mm	 26 Ø 120	 26 Ø 225

Fotometria del Prodotto

Photometric curve of the product



INC-SLIM/6W-INT



INC-SLIM/18W-INT

SLIM

Incasso in alluminio ultrasottile

Aluminium ultra slim down light



Materiale
Alluminio pressofuso

Material
Die cast alluminium

Colore
Bianco - nikel

Colour
White - nikel

Sorgente luminosa
LED SMD 8W - 12W - 18W - 24W

Light source
LED SMD 8W - 12W - 18W - 24W

Driver
incluso

Driver
included

Temperatura colore
3000K - 4000K - 6500K

Colour temperature
3000K - 4000K - 6500K

Punti luce
1

Number of light sources
1

Flusso luminoso
460 Lm - 960 Lm - 1520 Lm - 2040 Lm

Luminous flux
460 Lm - 960 Lm - 1520 Lm - 2040 Lm

Angolo di luce
120°

Beam angle
120°

CRI
>80

CRI
>80





Fotometria del Prodotto

Photometric curve of the product



INC-SLIM/8W



INC-SLIM/12W



INC-SLIM/18W



INC-SLIM/24W



INC-SLIM/8W BCO 8031440357203		8W	460 LM
INC-SLIM/8WF BCO 8031440357197		8W	460 LM
INC-SLIM/8WC BCO 8031440357180		8W	460 LM





INC-SLIM/12W BCO 8031431491183		12W	960 LM
INC-SLIM/12WF BCO 8031440357234		12W	960 LM
INC-SLIM/12WC BCO 8031440357258		12W	960 LM
INC-SLIM/12W NIK 8031431501189		12W	960 LM





INC-SLIM/18W BCO 8031431511188		18W	1520 LM
INC-SLIM/18WF BCO 8031440357210		18W	1520 LM
INC-SLIM/18WC BCO 8031440357227		18W	1520 LM
INC-SLIM/18W NIK 8031431521187		18W	1520 LM





INC-SLIM/24W BCO 8031440364720		24W	2040 LM
INC-SLIM/24WF BCO 8031440364713		24W	2040 LM
INC-SLIM/24WC BCO 8031440364706		24W	2040 LM
INC-SLIM/24W NIK 8031440364775		24W	2040 LM

Potenza - power	8W	12W	18W	24W
Foro - cut out dimensioni in mm - size mm	Ø 110	Ø 156	Ø 205	Ø 220
Misure - Size dimensioni in mm - size mm	Ø 120 - 18,5	Ø 170 - 18,5	Ø 225 - 18,5	Ø 240 - 18,5

FLAP

Incasso in alluminio ultrasottile

Aluminium ultra slim down light



Materiale

Alluminio pressofuso

Colore

Bianco opaco

Sorgente luminosa

LED SMD 8W - 12W - 18W

Driver

incluso

Temperatura colore

3000K - 4000K - 6500K

Punti luce

1

Flusso luminoso

460 Lm - 960 Lm - 1520 Lm

Angolo di luce

120°

CRI

>80

Material

Die cast alluminium

Colour

Satin white

Light source

LED SMD 8W - 12W - 18W

Driver

included

Colour temperature

3000K - 4000K - 6500K

Number of light sources

1

Luminous flux

460 Lm - 960 Lm - 1520 Lm

Beam angle

120°

CRI

>80

Fotometria del Prodotto

Photometric curve of the product



INC-FLAP 8W



INC-FLAP 12W



INC-FLAP 18W



INC-FLAP/8WM 8031440363402		8W	460 LM
INC-FLAP/8WF 8031440363389		8W	460 LM
INC-FLAP/8WC 8031440363419		8W	460 LM



INC-FLAP/12W 8031431441188		12W	960 LM
INC-FLAP/12WF 8031440357265		12W	960 LM
INC-FLAP/12WC 8031440354615		12W	960 LM



INC-FLAP/18W 8031431451187		18W	1520 LM
INC-FLAP/18WF 8031440357241		18W	1520 LM
INC-FLAP/18WC 8031440357272		18W	1520 LM

Potenza - power	8W	12W	18W
Foro - cut out dimensioni in mm - size mm	105x105	155x155	205x205
Misure - Size dimensioni in mm - size mm	120x120 / 18,5	166x166 / 18,5	225x225 / 18,5

PLUS

Incasso in alluminio con bordo effetto plafoniera

Aluminium recessed light with surface mount edge effect



Materiale

Struttura in alluminio diffusore in acrilico

Material

Aluminium structure , acrylic diffuser

Colore

Bianco opaco

Colour

Satin white

Sorgente luminosa

LED SMD 8W - 20W - 30W

Light source

LED SMD 8W - 20W - 30W

Driver

incluso

Driver

included

Temperatura colore

4000K

Colour temperature

4000K

Punti luce

1

Number of light sources

1

Flusso luminoso

800 Lm - 2200 Lm - 3300 Lm

Luminous flux

800 Lm - 2200 Lm - 3300 Lm

Angolo di luce

120°

Beam angle

120°

CRI

>85

CRI

>85

Fotometria del Prodotto

Photometric curve of the product



INC-PLUS-R8M



INC-PLUS-R20M



INC-PLUS-R30M



INC-PLUS-R8M
8031414876105
8W **800 LM**

Misure - Size
dimensioni in mm - size mm



Foro - cut out
dimensioni in mm - size mm





INC-PLUS-R20M
8031414876136
20W **2200 LM**

Misure - Size
dimensioni in mm - size mm



Foro - cut out
dimensioni in mm - size mm





INC-PLUS-R30M
8031414876167
30W **3300 LM** **PF 0,90**

Misure - Size
dimensioni in mm - size mm



Foro - cut out
dimensioni in mm - size mm



MIZAR

Incasso orientabile in policarbonato

Materiale
PC

Colore
Bianco

Sorgente luminosa
LED SMD 3W - 6,5W - 15W

Driver
integrato

Temperatura colore
4000K

Punti luce
1

Flusso luminoso
240 Lm - 500 Lm - 1000 Lm

Angolo di luce
38° - 45°

CRI
>80

Adjustable recessed light in polycarbonate

Material
PC

Colour
White

Light source
LED SMD 3W - 6,5W - 15W

Driver
built-in

Colour temperature
4000K

Number of light sources
1

Luminous flux
240 Lm - 500 Lm - 1000 Lm

Beam angle
38° - 45°

CRI
>80





Fotometria del Prodotto

Photometric curve of the product


INC-MIZAR 3W


INC-MIZAR 6,5W


INC-MIZAR 15W

MIZAR



INC-MIZAR-R3 8031414866632	3W	38°	240 LM
INC-MIZAR-R6 8031414866816	6,5W	38°	500 LM
INC-MIZAR-R15 8031414866786	15W	45°	1000 LM

Modello	R3	R6	R15
Foro - cut out dimensioni in mm - size mm	Ø 55	Ø 70	Ø 120
Misure - Size dimensioni in mm - size mm	45 Ø 75	45 Ø 90	55 Ø 145



INC-MIZAR-Q3 8031414866649	3W	38°	240 LM
INC-MIZAR-Q6 8031414866793	6,5W	38°	500 LM
INC-MIZAR-Q15 8031414866755	15W	45°	1000 LM

Modello	Q3	Q6	Q15
Foro - cut out dimensioni in mm - size mm	Ø 55	Ø 70	Ø 120
Misure - Size dimensioni in mm - size mm	45 75x75	45 90x90	55 145x145

PLASMA

Incasso in alluminio bordo in vetro

Aluminium recessed light with glass edge



Materiale
Bordo in vetro trasparente temperato con anello cromato

Material
clear tempered glass edge whit chrome metal ring

Colore
Cromato

Colour
Chrome

Sorgente luminosa
LED SMD 12W- 18W

Light source
LED SMD 12W - 18W

Driver
incluso

Driver
included

Temperatura colore
4000K

Colour temperature
4000K

Punti luce
1

Number of light sources
1

Flusso luminoso
900 Lm - 1400 Lm

Luminous flux
900 Lm - 1400 Lm

Angolo di luce
120°

Beam angle
120°

CRI
>80

CRI
>80





INC-PLASMA-12W 8031440081276	12W	900 LM
INC-PLASMA-18W 8031440091275	18W	1400 LM

Potenza - power	12W	18W
Foro - cut out dimensioni in mm - size mm		
Misure - Size dimensioni in mm - size mm		

Fotometria del Prodotto

Photometric curve of the product



INC-PLASMA-12W



INC-PLASMA-18W

POLARIS

Incasso in alluminio orientabile

Aluminium adjustable recessed light



Materiale
Alluminio

Material
Alluminium

Colore
Bianco o silver goffrato

Colour
Embossed white or silver

Sorgente luminosa
LED COB 3W

Light source
LED COB 3W

Driver
incluso

Driver
included

Temperatura colore
4000K

Colour temperature
4000K

Punti luce
1

Number of light sources
1

Flusso luminoso
240 Lm

Luminous flux
240 Lm

Durata e on/off
25.000 h ~ >10.000 on/off

Life time and on/off
25.000 h ~ >10.000 on/off

Angolo di luce
24°

Beam angle
24°

CRI
>80

CRI
>80





INC-POLARIS-R3 8031432041196		240 LM
INC-POLARIS-R3 BCO 8031429681169		240 LM

Foro - cut out
dimensioni in mm - size mm



Misure - Size
dimensioni in mm
size mm



Fotometria del Prodotto

Photometric curve of the product



INC-POLARIS R3





INC-POLARIS-Q3 8031432051195		240 LM
INC-POLARIS-Q3 BCO 8031429761168		240 LM

Foro - cut out
dimensioni in mm - size mm



Misure - Size
dimensioni in mm
size mm



Fotometria del Prodotto

Photometric curve of the product



INC-POLARIS R3

GEMINI

Incasso in alluminio orientabile

Aluminium adjustable recessed light



Materiale
Alluminio

Material
alluminium

Colore
Bianco o silver goffrato

Colour
Embossed white or silver

Sorgente luminosa
LED COB 2X5W

Light source
LED COB 2X5W

Driver
incluso

Driver
included

Temperatura colore
4000K

Colour temperature
4000K

Punti luce
2

Number of light sources
2

Flusso luminoso
630 Lm

Luminous flux
630 Lm

Angolo di luce
87°

Beam angle
87°

CRI
>80

CRI
>80





INC-GEMINI-PL6 8031432011199	☐	**630 LM**
INC-GEMINI-PL6 BCO 8031439191269	☐	**630 LM**

Foro - cut out
dimensioni in mm - size mm



Misure - Size
dimensioni in mm - size mm



Fotometria del Prodotto

Photometric curve of the product



INC-GEMINI PL6*

** Le curve fotometriche sopra indicate rappresentano il singolo modulo LED per ogni elemento*
** Above photometric curve represent the single module of each element*

ORIONE

Incasso in alluminio orientabile

Aluminium adjustable recessed light



Materiale
Alluminio

Material
Alluminium

Colore
Bianco o silver goffrato

Colour
Embossed white or silver

Sorgente luminosa
LED COB 6W

Light source
LED COB 6W

Driver
incluso

Driver
included

Temperatura colore
4000K

Colour temperature
4000K

Punti luce
1

Number of light sources
1

Flusso luminoso
380 Lm

Luminous flux
380 Lm

Angolo di luce
87°

Beam angle
87°

CRI
>80

CRI
>80





INC-ORIONE-R6 8031432021198	☐	**380 LM**
INC-ORIONE-R6 BCO 8031429771167	☐	**380 LM**

Foro - cut out
dimensioni in mm
size mm



Misure - Size
dimensioni in mm
size mm



Fotometria del Prodotto

Photometric curve of the product



INC-ORIONE R6





INC-ORIONE-Q6 8031432031197	☐	**380 LM**
INC-ORIONE-Q6 BCO 8031434361216	☐	**380 LM**

Foro - cut out
dimensioni in mm
size mm



Misure - Size
dimensioni in mm
size mm



Fotometria del Prodotto

Photometric curve of the product



INC-ORIONE Q6

BLITZ

Lampada sottopensile kit 3 pz

Cabinet ceiling lamp kit 3 pcs



Materiale
Struttura in alluminio
diffusore in pc

Material
Aluminium structure with
PC diffuser

Colore
Bianco opaco

Colour
Matt white

Sorgente luminosa
LED SMD 3x5W

Light source
LED SMD 3x5W

Driver
Incluso

Driver
Included

Temperatura colore
4000K

Color temperature
4000K

Flusso luminoso
3x350 Lm

Luminous flux
3x350 Lm

Angolo di luce
105°

Beam angle
105°

CRI
>80

CRI
>80

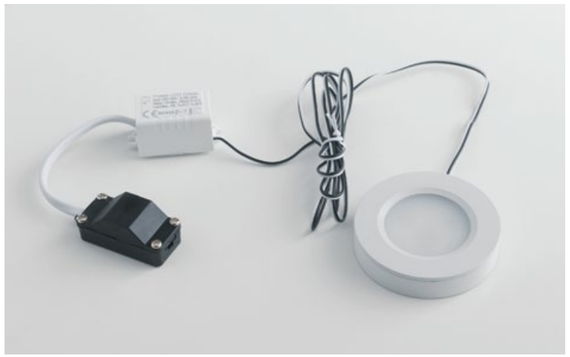

LED-BLITZ-R3 **3X5W - 3X350 LM**
8031440353274

Misure - Size
dimensioni in mm - size mm



Fotometria del Prodotto

Photometric curve of the product



LED-BLITZ-R3*

Accessori inclusi
Included accessories

x3
Driver + morsettiera
con cavo 1500 mm
Driver + connector
with 1500mm cable included



** Le curve fotometriche sopra indicate rappresentano il singolo elemento*
** Above photometric curve represent the single element*



FUSION

Incasso in alluminio

Materiale
Alluminio

Colore
Nikel - bianco satinato - oro

Sorgente luminosa
LED SMD 5W

Driver
integrato

Temperatura colore
4000K

Punti luce
1

Flusso luminoso
230 Lm

Angolo di luce
120°

CRI
>80

Aluminium recessed light

Material
Alluminium

Colour
Nikel - satin white - gold finish

Light source
LED SMD 5W

Driver
built-in

Colour temperature
4000K

Number of light sources
1

Luminous flux
230 Lm

Beam angle
120°

CRI
>80





Fotometria del Prodotto

Photometric curve of the product



INC-FUSION 5W

INC-FUSION-5W NIK 8031440361705		5W	230 LM
INC-FUSION-5W BCO 8031440361736		5W	230 LM
INC-FUSION-5W ORO 8031440361712		5W	230 LM

Misure - Size
dimensioni in mm - size mm



Foro - cut out
dimensioni in mm - size mm



FUSION

Incasso in alluminio

Materiale
Alluminio

Colore
Nikel - bianco satinato - oro

Sorgente luminosa
LED SMD 3x5W

Driver
integrato

Temperatura colore
4000K

Punti luce
3

Flusso luminoso
3x230 Lm

Angolo di luce
120°

CRI
>80

Aluminium recessed light

Material
Alluminium

Colour
Nikel - satin white - gold finish

Light source
LED SMD 3x5W

Driver
built-in

Colour temperature
4000K

Number of light sources
3

Luminous flux
3x230 Lm

Beam angle
120°

CRI
>80





Fotometria del Prodotto

Photometric curve of the product



INC-FUSION 5W

Le curve fotometriche sopra indicate rappresentano il singolo elemento

Above photometric curve represent the single element

INC-FUSION-3X5W NIK 8031440353342		3X5W	3X230 LM	KIT 3 PZ
INC-FUSION-3X5W BCO 8031440353335		3X5W	3X230 LM	KIT 3 PZ
INC-FUSION-3X5W ORO 8031440353359		3X5W	3X230 LM	KIT 3 PZ

Misure - Size
dimensioni in mm - size mm



Foro - cut out
dimensioni in mm - size mm



NEMO

Lampada sottopensile da incasso

Recessed cabinet lamp



Materiale
Struttura in termoplastica

Material
Thermoplastic structure

Colore
Bianco - silver

Colour
white - silver

Sorgente luminosa
LED SMD 3,5W

Light source
LED SMD 3,5W

Driver
Integrato

Driver
Built-in

Temperatura colore
4000K

Color temperature
4000K

Flusso luminoso
250 Lm

Luminous flux
250 Lm

Angolo di luce
120°

Beam angle
120°

CRI
>80

CRI
>80



INC-NEMO-65 BCO 8031414877065		3,5W	250 LM
INC-NEMO-65 SIL 8031414877072		3,5W	250 LM

Misure - Size
dimensioni in mm - size mm



Misure foro - hole size
dimensioni in mm - size mm



Fotometria del Prodotto

Photometric curve of the product



INC-NEMO 3,5W

RAINBOW

Incasso in alluminio

Alluminium recessed light



Materiale
Alluminio

Material
Alluminium

Colore
Cromato o bianco

Colour
Chrome or white

Sorgente luminosa
LED SMD 5W

Light source
LED SMD 5W

Driver
DC 12V tensione costante
non incluso

Driver
DC 12V costant voltage
not included

Temperatura colore
RGB + 4000K

Colour temperature
RGB + 4000K

Punti luce
1

Number of light sources
1

Angolo di luce
120°

Beam angle
120°

CRI
>80

CRI
>80





INC-RAINBOW-M 8031414862603	RGB +	
INC-RAINBOW-M BCO 8031414862627	RGB +	

Foro - cut out
dimensioni in mm - size mm



Misure - Size
dimensioni in mm - size mm



Fotometria del Prodotto

Photometric curve of the product



INC-RAINBOW 4000K

Sistema di connessione
Connection system



Driver pag. 701

Controller pag. 708

NADIR

Incasso in alluminio

Materiale
Alluminio pressofuso
Colore
Bianco goffrato

Sorgente luminosa
LED COB 6W

Driver
incluso

Temperatura colore
3200K - 5500K

Punti luce
1

Flusso luminoso
390 Lm, 420 Lm

Angolo di luce
21°

CRI
>80

Aluminium recessed light

Material
Die cast alluminium
Colour
Embossed white

Light source
LED COB 6W

Driver
included

Colour temperature
3200K - 5500K

Number of light sources
1

Luminous flux
390 Lm, 420 Lm

Beam angle
21°

CRI
>80





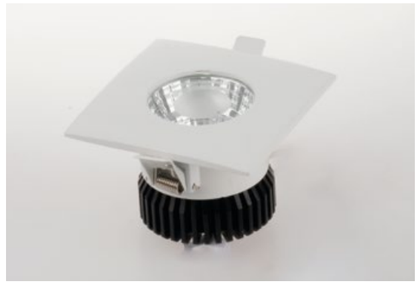

INC-NADIR-R6C 8031439671266		390 LM
INC-NADIR-R6F 8031439641269		420 LM

Foro - cut out
dimensioni in mm - size mm



Misure - Size
dimensioni in mm - size mm



INC-NADIR-Q6C 8031439691264		390 LM
INC-NADIR-Q6F 8031439661267		420 LM

Foro - cut out
dimensioni in mm - size mm



Misure - Size
dimensioni in mm - size mm



Fotometria del Prodotto

Photometric curve of the product



INC-NADIR 6W

ZENIT

Incasso orientabile

Materiale
Policarbonato
Colore
Nikel - bianco satinato - cromo - oro

Sorgente luminosa
LED SMD 5W

Driver
integrato

Temperatura colore
3000K

Punti luce
1

Flusso luminoso
400 Lm

Angolo di luce
120°

CRI
>80

Adjustable recessed light

Material
Polycarbonate
Colour
Nikel - satin white - chrome - gold finish

Light source
LED SMD 5W

Driver
built-in

Colour temperature
3000K

Number of light sources
1

Luminous flux
400 Lm

Beam angle
120°

CRI
>80









INC-ZENIT-5W NIK 8031439901271		5W	400 LM
INC-ZENIT-5W BCO 8031439881276		5W	400 LM
INC-ZENIT-5W CR 8031439891275		5W	400 LM
INC-ZENIT-5W ORO 8031439911270		5W	400 LM

Foro - cut out
dimensioni in mm - size mm



Misure - Size
dimensioni in mm - size mm



Fotometria del Prodotto

Photometric curve of the product



INC-ZENIT 5W

HORUS

Incasso dimmerabile





Materiale
Policarbonato

Colore
Bianco opaco

Sorgente luminosa
LED SMD 10W -15W - 20W - 25W

Driver
integrato

Temperatura colore
4000K

Dimmer
Dimmer 1-10

Punti luce
1

Flusso luminoso
750 Lm - 1100 Lm - 1800 Lm - 2200 Lm

Angolo di luce
100°

CRI
>80

Dimmable recessed light

Material
Polycarbonate

Colour
Matt white

Light source
LED SMD 10W -15W - 20W - 25W

Driver
built-in

Colour temperature
4000K

Dimmer
Dimmable 1-10

Number of light sources
1

Luminous flux
750 Lm - 1100 Lm - 1800 Lm - 2200 Lm

Beam angle
100°

CRI
>80

Fotometria del Prodotto

Photometric curve of the product


INC-HORUS-10W


INC-HORUS-15W


INC-HORUS-20W


INC-HORUS-25W



INC-HORUS-10W
8031440363501
10W **750 LM**

Misure - Size
dimensioni in mm - size mm



Foro - cut out
dimensioni in mm - size mm





INC-HORUS-15W
8031440363518
15W **1100 LM**

Misure - Size
dimensioni in mm - size mm



Foro - cut out
dimensioni in mm - size mm





INC-HORUS-20W
8031440363464
20W **1800 LM**

Misure - Size
dimensioni in mm - size mm



Foro - cut out
dimensioni in mm - size mm





INC-HORUS-25W
8031440363495
25W **PF 0,90** **2200 LM**

Misure - Size
dimensioni in mm - size mm



Foro - cut out
dimensioni in mm - size mm



MATRIX

Kit 3 pz. incasso in metallo con lampadina GU10 inclusa

Materiale
Metallo

Colore
Bianco opaco - nikel

Specifiche portalampada
GU10 230V~50Hz

Lampadine incluse
3pz x GU10 6W LED

Kit 3 pcs metal down lights with GU10 bulb included

Material
Metal

Colour
Matt white - nikel

Lampholder specification
GU10 230V~50Hz

Include bulbs
3pcs x GU10 6W LED



INC-MATRIX-LEDF3 NIK 8031440359337		3XGU10 6W LED
INC-MATRIX-LEDF3 BCO 8031440359320		3XGU10 6W LED



Foro - cut out
dimensioni in mm - size mm



Misure - Size
dimensioni in mm - size mm



ACCESSORI INCLUSI

3 lampadine LED SMD
3 LED SMD light bulbs

Dimmer	Watt	CRI	Lumen	Angolo	Kelvin	On/off
⊘	5W	80	413	100°	3000	>10.000

STAFFA CON CONNETTORE BRACKET WITH CONNECTOR INCLUDED		3 Pz inclusi *3 pcs included*
PORTALAMPADA LAMPHOLDER INCLUDED		3 Pz inclusi *3 pcs included*

MATRIX

Kit 3 pz. incasso in metallo con lampadina GU10 inclusa

Materiale
Metallo

Colore
Bianco - nikel - oro - cromo

Specifiche portalampada
GU10 230V~50Hz

Lampadine incluse
3pz x GU10 6W LED

Kit 3 pcs metal down lights with GU10 bulb included

Material
Metal

Colour
White - nikel - gold - chrome

Lampholder specification
GU10 230V~50Hz

Include bulbs
3pcs x GU10 6W LED





INC-MATRIX-LEDM3 NIK 8031431571182		3XGU10 6W LED
INC-MATRIX-LEDM3 BCO 8031429651162		3XGU10 6W LED
INC-MATRIX-LEDM3 CR 8031440313032		3XGU10 6W LED
INC-MATRIX-LEDM3 ORO 8031440313025		3XGU10 6W LED

Foro - cut out
dimensioni in mm - size mm



Misure - Size
dimensioni in mm - size mm



ACCESSORI INCLUSI

3 lampadine LED SMD
3 LED SMD light bulbs

Dimmer	Watt	CRI	Lumen	Angolo	Kelvin	On/off
⊘	5W	80	413	100°	3000	>10.000

STAFFA CON CONNETTORE BRACKET WITH CONNECTOR INCLUDED		3 Pz inclusi *3 pcs included*
PORTALAMPADA LAMPHOLDER INCLUDED		3 Pz inclusi *3 pcs included*

MATRIX

incasso in metallo con lampadina GU10 inclusa

Materiale
Metallo

Colore
Bianco - nikel - oro - cromo

Specifiche portalampada
GU10 230V~50Hz

Lampadine incluse
GU10 6W LED

metal down lights with GU10 bulb included

Material
Metal

Colour
White - nikel - gold - chrome

Lampholder specification
GU10 230V~50Hz

Include bulbs
GU10 6W LED



15°

INC-MATRIX-LEDM1 NIK 8031440313049		1XGU10 6W LED
INC-MATRIX-LEDM1 BCO 8031440313063		1XGU10 6W LED
INC-MATRIX-LEDM1 CR 8031440313056		1XGU10 6W LED
INC-MATRIX-LEDM1 ORO 8031440313070		1XGU10 6W LED

Foro - cut out
dimensioni in mm - size mm



Misure - Size
dimensioni in mm - size mm



ACCESSORI INCLUSI

lampadina LED SMD
LED SMD light bulbs

Dimmer	Watt	CRI	Lumen	Angolo	Kelvin	On/off
	5W	80	413	100°	3000	>10.000

STAFFA CON CONNETTORE BRACKET WITH CONNECTOR INCLUDED		1 Pz inclusi *1 pcs included*
PORTALAMPADA LAMPHOLDER INCLUDED		1 Pz inclusi *1 pcs included*

STARRY

Incasso in gesso da integrare nel cartongesso per dare omogeneità tra parete e corpo illuminante con punto luce a LED integrato

Materiale
Gesso - Alluminio

Colore
Bianco

Sorgente luminosa
LED COB 2,5W

Driver
incluso

Temperatura colore
3000K - 4000K

Punti luce
1

Flusso luminoso
212 Lm 219 Lm

Angolo di luce
45°

CRI
>80

Gypsun recessed light to be integrated into the plasterboard to give homogeneity between the wall and the lighting body with built-in LED light source

Material
Gypsun - Aluminum

Colour
White

Light source
LED COB 2,5W

Driver
included

Colour temperature
3000K - 4000K

Number of light sources
1

Luminous flux
212 Lm 219 Lm

Beam angle
45°

CRI
>80

Personalizza il tuo articolo
Personalize your item

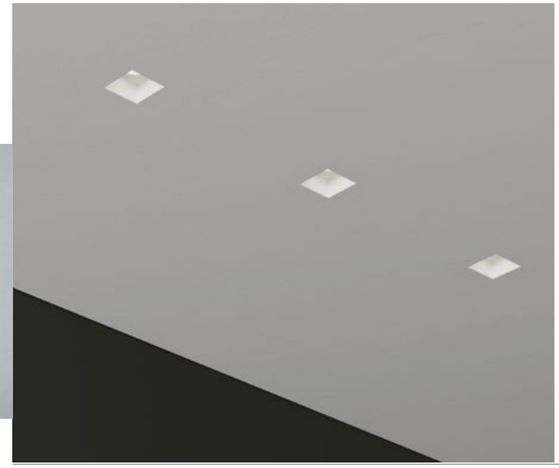



LED-STARRY-C 8031414884476		2,5W	212 LM
LED-STARRY-M 8031414884483		2,5W	219 LM

Misure - Size
dimensioni in mm - size mm



Fotometria del Prodotto
Photometric curve of the product



LED-STARRY



INC-STARRY-Q1
8031414884469

Misure - Size
dimensioni in mm - size mm



Foro - cut out
dimensioni in mm - size mm





INC-STARRY-R1
8031414884452

Misure - Size
dimensioni in mm - size mm



Foro - cut out
dimensioni in mm - size mm



TUBEX

Incasso in gesso da integrare nel cartongesso per dare omogeneità tra parete e corpo illuminante con punto luce a LED integrato regolabile e orientabile.

Gypsun recessed light to be integrated into the plasterboard to give homogeneity between the wall and the lighting body with built-in LED light source adjustable

Verniciabile
Paintable

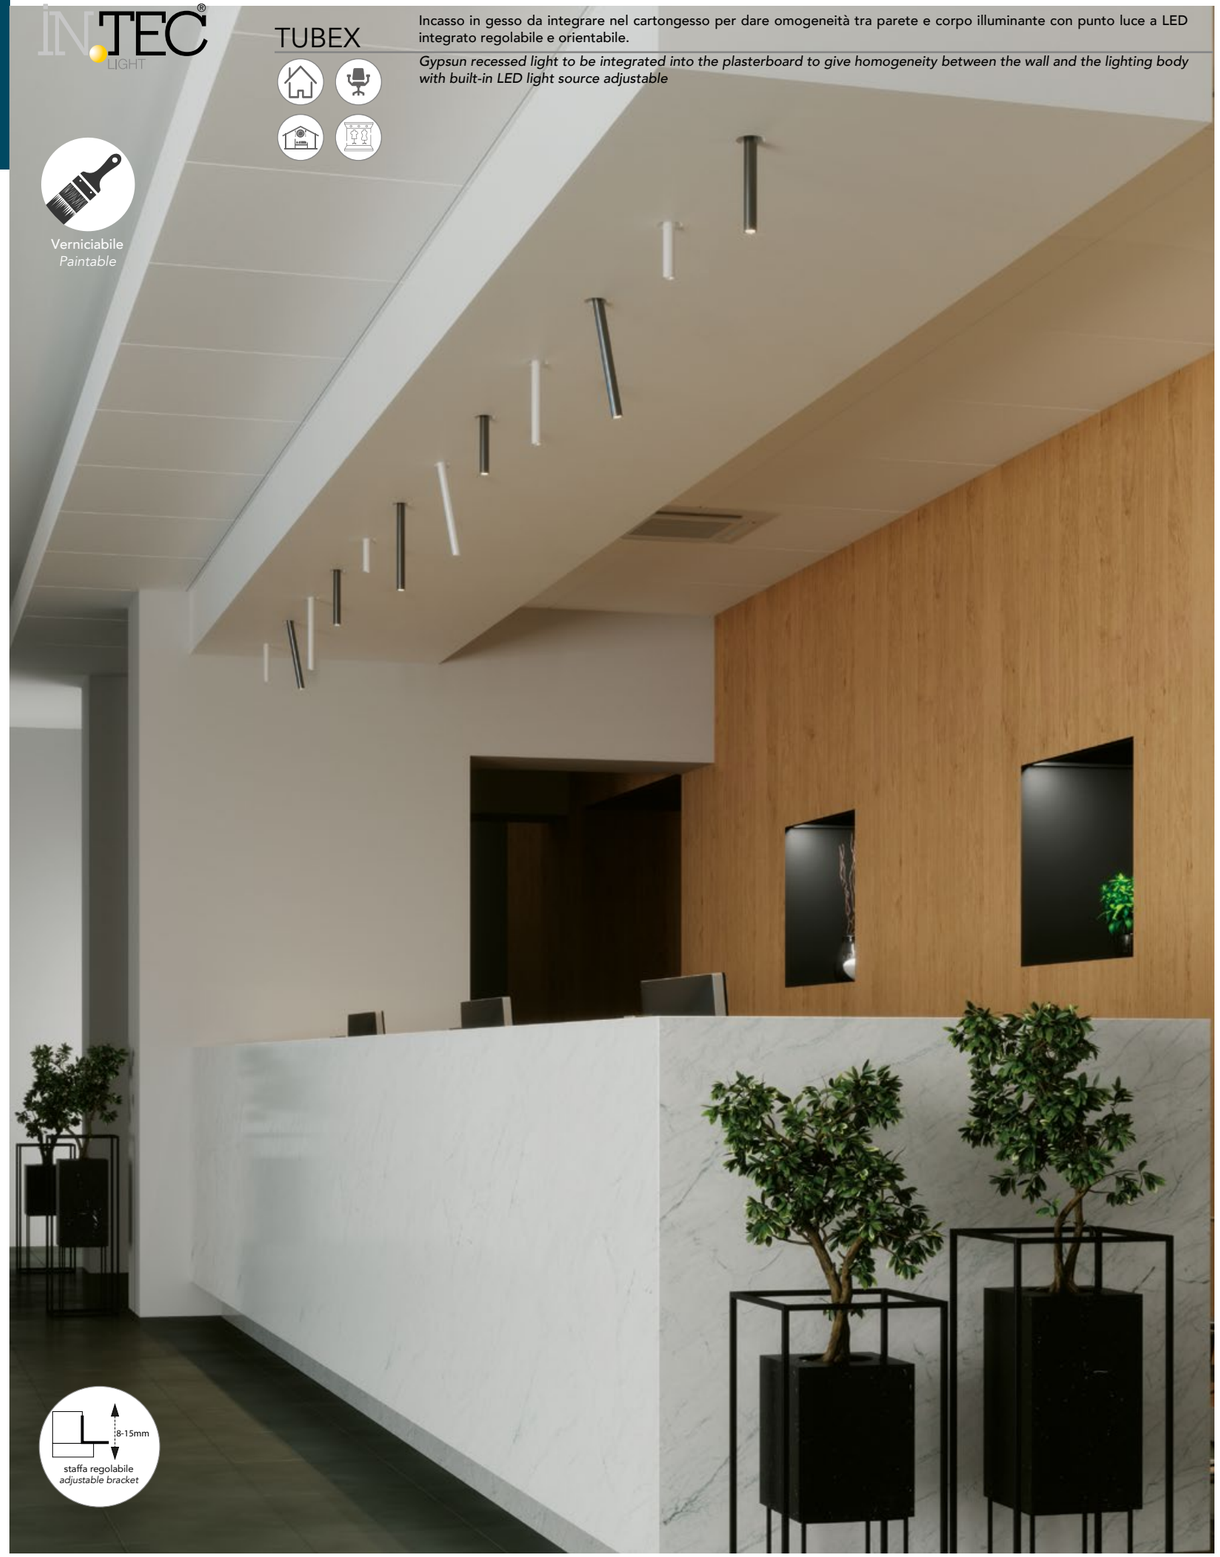

TUBEX



Materiale
Gesso e alluminio
Colore
Bianco matto - Nero matto
Sorgente luminosa
LED COB 2,5W
Driver
incluso
Temperatura colore
3000K - 4000K
Punti luce
1
Flusso luminoso
217 Lm
Angolo di luce
30°
CRI
>80

Material
Gypsum and aluminum
Colour
Finish matt white - black
Light source
LED COB 2,5W
Driver
included
Colour temperature
3000K - 4000K
Number of light sources
1
Luminous flux
217 Lm
Beam angle
30°
CRI
>80

Personalizza il tuo articolo
Personalize your item





INC-TUBEX-2C-NER 8031414883776		2,5W	217 LM
INC-TUBEX-2M-NER 8031414883783		2,5W	217 LM
INC-TUBEX-2C-BCO 8031414883752		2,5W	217 LM
INC-TUBEX-2M-BCO 8031414883769		2,5W	217 LM

Misure - Size
dimensioni in mm - size mm







INC-TUBEX-BASE
8031414883745

Foro - cut out
dimensioni in mm - size mm



Misure - Size
dimensioni in mm - size mm



VULKAN

Incasso in gesso verniciabile con cilindri intercambiabili

Gypsun down light paintable with interchangeable cylinders

Personalizza il tuo articolo
Personalize your item

Verniciabile
Paintable

GU10
Attacco sorgente
Light source



8-15mm
staffa regolabile
adjustable bracket



INC-VULKAN-BASE
8031414883707

Misure - Size
dimensioni in mm - size mm



Foro - cut out
dimensioni in mm - size mm



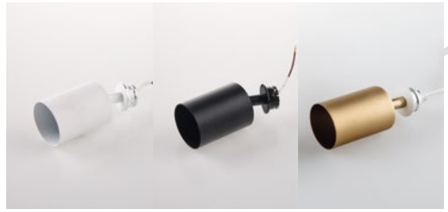

Portalampada incluso
Lampholder included

INC-VULKAN-BCO 8031414883714		1XGU10 MAX 35W
INC-VULKAN-NER 8031414883721		1XGU10 MAX 35W
INC-VULKAN-ORO 8031414883738		1XGU10 MAX 35W

Lampadina non inclusa
Light bulb not included

Misure - Size
dimensioni in mm - size mm



ENTITY

Incasso in gesso verniciabile con ghiere intercambiabili

Gypsun down light paintable with interchangeable reflector

Personalizza il tuo articolo
Personalize your item

Verniciabile
Paintable

GU10
Attacco sorgente
Light source



8-15mm
staffa regolabile
adjustable bracket



Portalampada incluso
Lampholder included

INC-ENTITY-Q
8031414883790
1XGU10 MAX 35W

Lampadina non inclusa
Light bulb not included

Misure - Size
dimensioni in mm - size mm



Foro - cut out
dimensioni in mm - size mm





ENTITY-RING-CR 8031414883813	
ENTITY-RING-NER 8031414883820	
ENTITY-RING-ORO 8031414883806	

Misure - Size
dimensioni in mm - size mm



GOBLET

Incasso in gesso verniciabile.

Gypsun down light paintable.

Verniciabile
Paintable

GU10
Attacco sorgente
Light source



Portalampada incluso
Lampholder included

INC-GOBLET-R
8031414882960
1XGU10 MAX 35W

Lampadina non inclusa
Light bulb not included

Misure - Size
dimensioni in mm - size mm



Foro - cut out
dimensioni in mm - size mm





Portalampada incluso
Lampholder included

INC-GOBLET-Q
8031414882977
1XGU10 MAX 35W

Lampadina non inclusa
Light bulb not included

Misure - Size
dimensioni in mm - size mm



Foro - cut out
dimensioni in mm - size mm



CE

SHADOW

Incassi in gesso verniciabili.

Gypsun down light paintable.

Verniciabile
Paintable

GU10
Attacco sorgente
Light source





Portalampada incluso
Lampholder included

INC-SHADOW-R
8031414882984
1XGU10 MAX 35W

Lampadina non inclusa
Light bulb not included

Misure - Size
dimensioni in mm - size mm



Foro - cut out
dimensioni in mm - size mm





Portalampada incluso
Lampholder included

INC-SHADOW-Q
8031414882991
1XGU10 MAX 35W

Lampadina non inclusa
Light bulb not included

Misure - Size
dimensioni in mm - size mm



Foro - cut out
dimensioni in mm - size mm



CE

PHANTOM

Incasso in gesso verniciabile.

Gypsun down light paintable.



Verniciabile
Paintable

GU10
Attacco sorgente
Light source



Portalampada incluso
Lampholder included

INC-PHANTOM-R1
8031431551184
1XGU10 MAX 35W

Lampadina non inclusa
Light bulb not included

Misure - Size
dimensioni in mm - size mm



Foro - cut out
dimensioni in mm - size mm



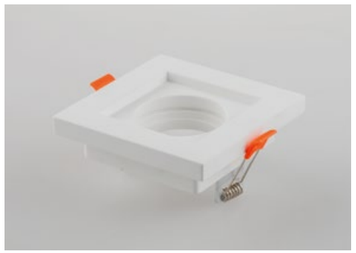

Portalampada incluso
Lampholder included

INC-PHANTOM-Q1
8031431561183
1XGU10 MAX 35W

Lampadina non inclusa
Light bulb not included

Misure - Size
dimensioni in mm - size mm



Foro - cut out
dimensioni in mm - size mm



SPETTRO

Incassi in gesso verniciabili.

Gypsun down light paintable.



Verniciabile
Paintable

GU10
Attacco sorgente
Light source



Portalampada incluso
Lampholder included

INC-SPETTRO-R1
8031431531186
1XGU10 MAX 35W

Lampadina non inclusa
Light bulb not included

Misure - Size
dimensioni in mm - size mm



Foro - cut out
dimensioni in mm - size mm





Portalampada incluso
Lampholder included

INC-SPETTRO-Q1
8031431541185
1XGU10 MAX 35W

Lampadina non inclusa
Light bulb not included

Misure - Size
dimensioni in mm - size mm



Foro - cut out
dimensioni in mm - size mm



MINI

Faretto da incasso in gesso da integrare nel cartongesso per dare omogeneità tra soffitto e corpo illuminante

Recessed gypsun downlight to be integrated into the plasterboard to give homogeneity between the ceiling and the lighting body



Verniciabile
Paintable

GU10
Attacco sorgente
Light source

ø 34
Misura lampadina
Bulb size







Portalampada incluso
Lampholder included

INC-MINI-R1
8031414873623

1XMINI GU10 MAX 35W

Lampadina non inclusa
Light bulb not included

Misure - Size
dimensioni in mm - size mm



Foro - cut out
dimensioni in mm - size mm



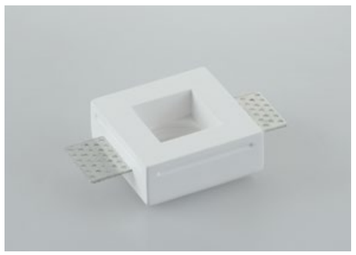

Portalampada incluso
Lampholder included

INC-MINI-Q1
8031414873616

1XMINI GU10 MAX 35W

Lampadina non inclusa
Light bulb not included

Misure - Size
dimensioni in mm - size mm



Foro - cut out
dimensioni in mm - size mm



SPIRIT

Faretto da incasso in gesso da integrare nel cartongesso per dare omogeneità tra soffitto e corpo illuminante

Recessed gypsun downlight to be integrated into the plasterboard to give homogeneity between the ceiling and the lighting body

Verniciabile
Paintable

GU10
Attacco sorgente
Light source









Portalampada incluso
Lampholder included

INC-SPIRIT-R1
8031440362177

1XGU10 MAX 35W

Lampadina non inclusa
Light bulb not included

Misure - Size
dimensioni in mm - size mm



Foro - cut out
dimensioni in mm - size mm



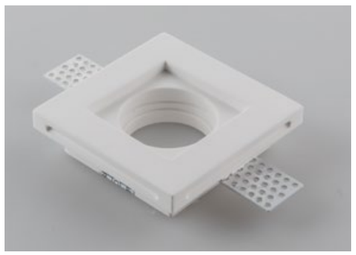

Portalampada incluso
Lampholder included

INC-SPIRIT-Q1
8031440362160

1XGU10 MAX 35W

Lampadina non inclusa
Light bulb not included

Misure - Size
dimensioni in mm - size mm



Foro - cut out
dimensioni in mm - size mm



GHOST

Faretto da incasso in gesso da integrare nel cartongesso per dare omogeneità tra soffitto e corpo illuminante

Recessed gypsun downlight to be integrated into the plasterboard to give homogeneity between the ceiling and the lighting body



Verniciabile
Paintable

GU10
Attacco sorgente
Light source

8-15mm
staffa regolabile
adjustable bracket



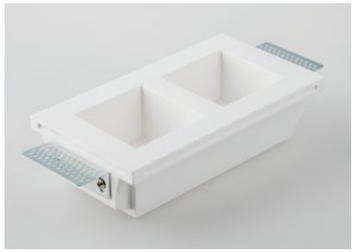

Portalampada incluso
Lampholder included

INC-GHOST-Q2
8031434301212
2XGU10 MAX 35W

Lampadina non inclusa
Light bulb not included

Misure - Size
dimensioni in mm - size mm



Foro - cut out
dimensioni in mm - size mm





Portalampada incluso
Lampholder included

INC-GHOST-Q1
8031434261219
1XGU10 MAX 35W

Lampadina non inclusa
Light bulb not included

Misure - Size
dimensioni in mm - size mm



Foro - cut out
dimensioni in mm - size mm





Portalampada incluso
Lampholder included

INC-GHOST-Q1D
8031434241211
1XGU10 MAX 35W

Lampadina non inclusa
Light bulb not included

Misure - Size
dimensioni in mm - size mm



Foro - cut out
dimensioni in mm - size mm



SNOW

Faretto da incasso in gesso con diffusore in vetro satinato da integrare nel cartongesso per dare omogeneità tra soffitto e corpo illuminante

Recessed gypsun downlight whit satin glass diffuser to be integrated into the plasterboard to give homogeneity between the ceiling and the lighting body



Verniciabile
Paintable

GU10
Attacco sorgente
Light source

8-15mm
staffa regolabile
adjustable bracket





Portalampada incluso
Lampholder included

INC-SNOW-R
8031440351607
1XGU10 MAX 10W

Lampadina non inclusa
Light bulb not included

Misure - Size
dimensioni in mm - size mm



Foro - cut out
dimensioni in mm - size mm





Portalampada incluso
Lampholder included

INC-SNOW-Q
8031440351577
1XGU10 MAX 10W

Lampadina non inclusa
Light bulb not included

Misure - Size
dimensioni in mm - size mm



Foro - cut out
dimensioni in mm - size mm



MORGANA

Faretto da incasso orientabile in gesso da integrare nel cartongesso per dare omogeneità tra soffitto e corpo illuminante

Adjustable recessed gypsun downlight to be integrated into the plasterboard to give homogeneity between the ceiling and the lighting body



Verniciabile
Paintable

GU10
Attacco sorgente
Light source

15°
Orientabile
Adjustable

8-15mm
staffa regolabile
adjustable bracket



2x Portalampada incluso
2x Lampholder included

INC-MORGANA-Q2
8031434201215
2XGU10 MAX 35W

Lampadina non inclusa
Light bulb not included

Misure - Size
dimensioni in mm - size mm



Foro - cut out
dimensioni in mm - size mm





Portalampada incluso
Lampholder included

INC-MORGANA-Q1
8031434231212
1XGU10 MAX 35W

Lampadina non inclusa
Light bulb not included

Misure - Size
dimensioni in mm - size mm



Foro - cut out
dimensioni in mm - size mm





Portalampada incluso
Lampholder included

INC-MORGANA-R1
8031434211214
1XGU10 MAX 35W

Lampadina non inclusa
Light bulb not included

Misure - Size
dimensioni in mm - size mm



Foro - cut out
dimensioni in mm - size mm



SENSO

Faretto da incasso in gesso da integrare nel cartongesso per dare omogeneità tra soffitto e corpo illuminante

Recessed gypsun downlight to be integrated into the plasterboard to give homogeneity between the ceiling and the lighting body

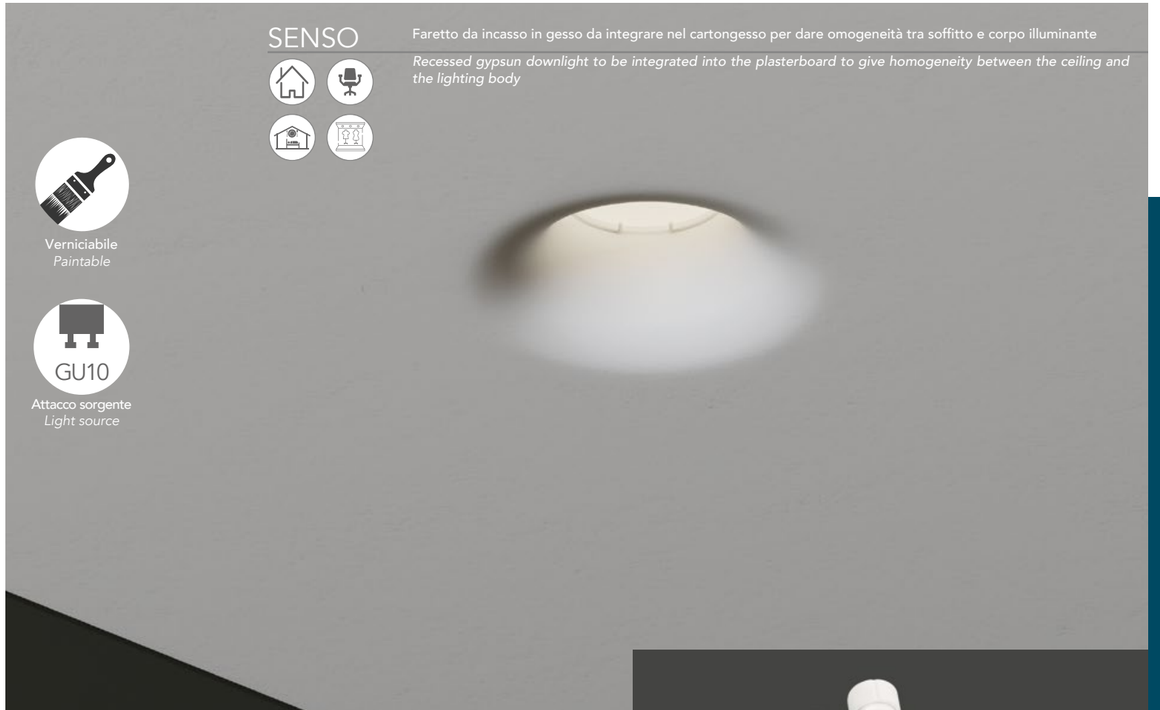

Verniciabile
Paintable

GU10
Attacco sorgente
Light source

8-15mm
staffa regolabile
adjustable bracket





Portalampada incluso
Lampholder included

INC-SENSO-1
8031434221213
1XGU10 MAX 35W

Lampadina non inclusa
Light bulb not included

Misure - Size
dimensioni in mm - size mm



Foro - cut out
dimensioni in mm - size mm





Portalampada incluso
Lampholder included

INC-SENSO-2
8031414873593
2XGU10 MAX 35W

Lampadina non inclusa
Light bulb not included

Misure - Size
dimensioni in mm - size mm



Foro - cut out
dimensioni in mm - size mm



BRICK

Faretto da incasso in gesso da integrare nel cartongesso per dare omogeneità tra soffitto e corpo illuminante

Recessed gypsun downlight to be integrated into the plasterboard to give homogeneity between the ceiling and the lighting body

Verniciabile
Paintable

GU10
Attacco sorgente
Light source





Portalampada incluso
Lampholder included

INC-BRICK-Q1
8031414873586

1XGU10 MAX 35W

Lampadina non inclusa
Light bulb not included

Misure - Size
dimensioni in mm - size mm



Foro - cut out
dimensioni in mm - size mm



HIVE

Faretto da incasso in gesso 4 punti luce da integrare nel cartongesso per dare omogeneità tra soffitto e corpo illuminante

Recessed gypsun downlight with 4 light to be integrated into the plasterboard to give homogeneity between the ceiling and the lighting body

Verniciabile
Paintable

GU10
Attacco sorgente
Light source

ø 34
Misura lampadina
Bulb size

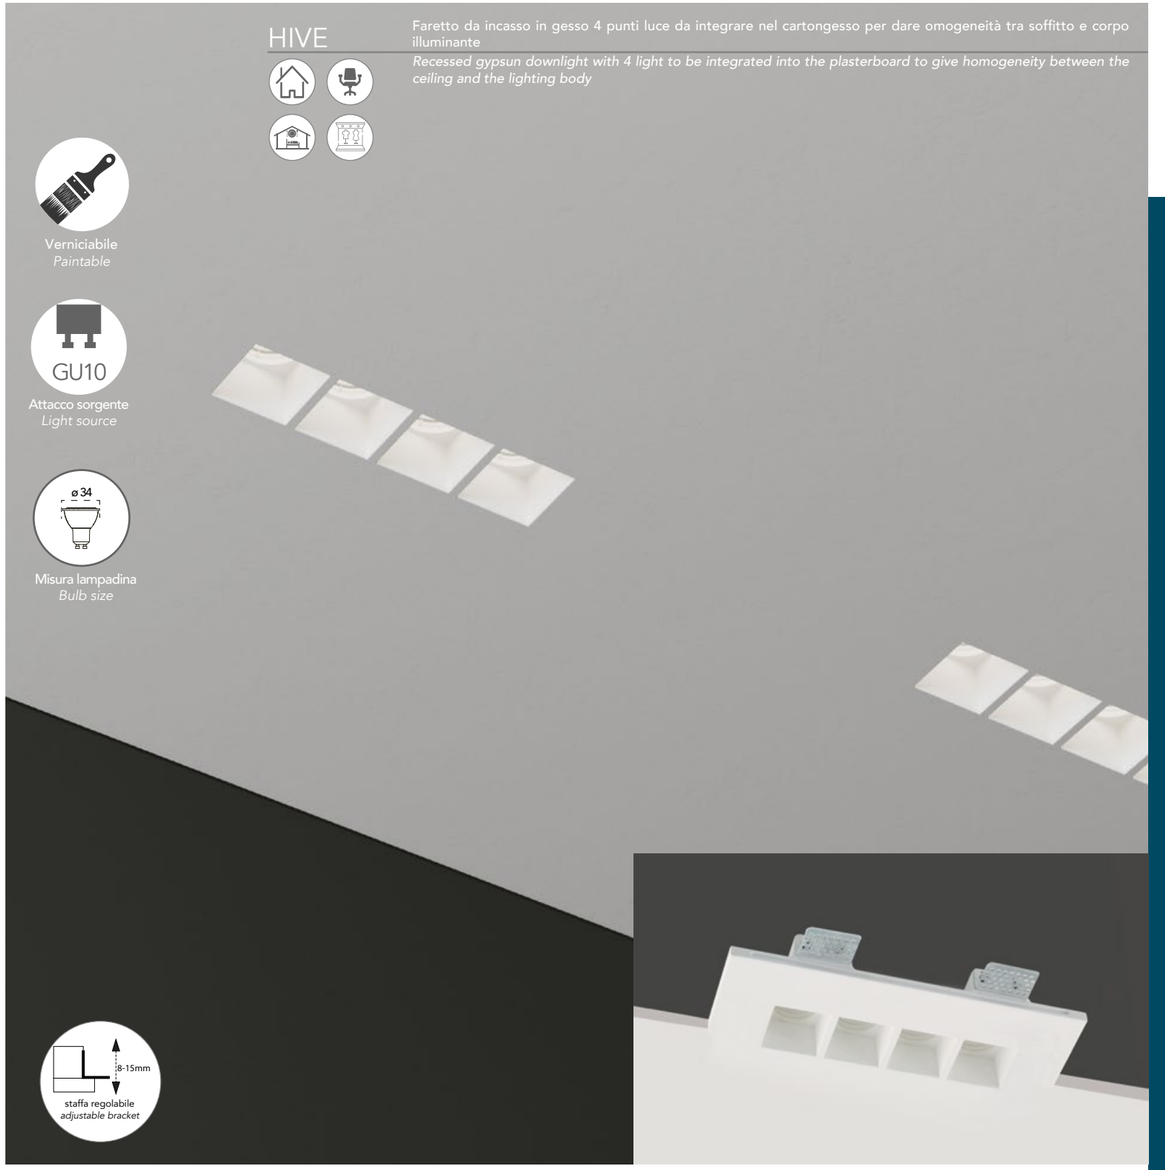



Portalampada incluso
Lampholder included

INC-HIVE-RT4
8031414884278

4XMINI GU10 MAX 35W

Lampadina non inclusa
Light bulb not included

Misure - Size
dimensioni in mm - size mm



Foro - cut out
dimensioni in mm - size mm



SKILIFT

Sistema componibile da incasso in gesso da integrare nel cartongesso per dare omogeneità tra soffitto e corpo illuminante

Modular recessed gypsun system to be integrated into the plasterboard to give homogeneity between the ceiling and the lighting body

Verniciabile
Paintable

GU10
Attacco sorgente
Light source

ø 34
Misura lampadina
Bulb size





INC-SKILIFT-40CM
8031414884346

Misure - Size
dimensioni in mm - size mm



Foro - cut out
dimensioni in mm - size mm



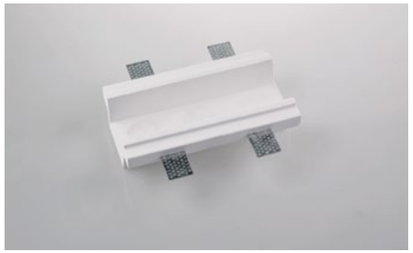

INC-SKILIFT-20CM
8031414884322

Misure - Size
dimensioni in mm - size mm



Foro - cut out
dimensioni in mm - size mm



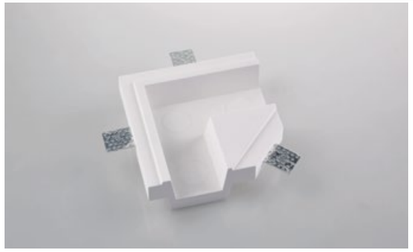

INC-SKILIFT-L16CM
8031414884360

Misure - Size
dimensioni in mm - size mm



Foro - cut out
dimensioni in mm - size mm



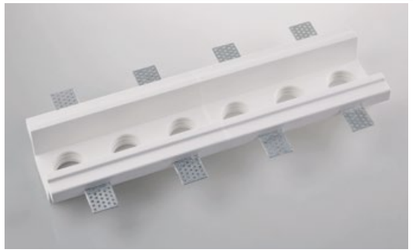



Portalampada incluso
Lampholder included

INC-SKILIFT-6
8031414884339
6XMINI GU10 MAX 35W

Lampadina non inclusa
Light bulb not included

Misure - Size
dimensioni in mm - size mm



Foro - cut out
dimensioni in mm - size mm



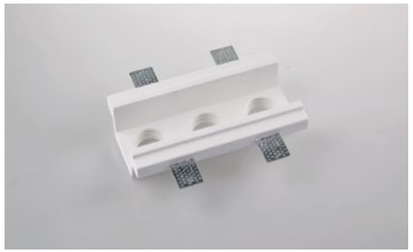



Portalampada incluso
Lampholder included

INC-SKILIFT-3
8031414884315
3XMINI GU10 MAX 35W

Lampadina non inclusa
Light bulb not included

Misure - Size
dimensioni in mm - size mm



Foro - cut out
dimensioni in mm - size mm



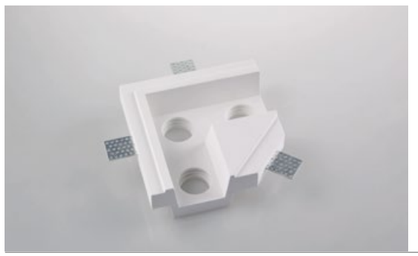



Portalampada incluso
Lampholder included

INC-SKILIFT-L3
8031414884353
3XMINI GU10 MAX 35W

Lampadina non inclusa
Light bulb not included

Misure - Size
dimensioni in mm - size mm



Foro - cut out
dimensioni in mm - size mm



EVA

Struttura ad incasso in gesso da integrare nel cartongesso per dare omogeneità tra soffitto e corpo illuminante

Recessed gypsun structure to be integrated into the plasterboard to give homogeneity between the ceiling and the lighting body



Verniciabile
Paintable

E27
Attacco sorgente
Light source



Portalampada incluso
Lampholder included

INC-EVA-R1
8031414873609
1XE27 MAX 35W

Lampadina non inclusa
Light bulb not included

Misure - Size
dimensioni in mm - size mm



Foro - cut out
dimensioni in mm - size mm



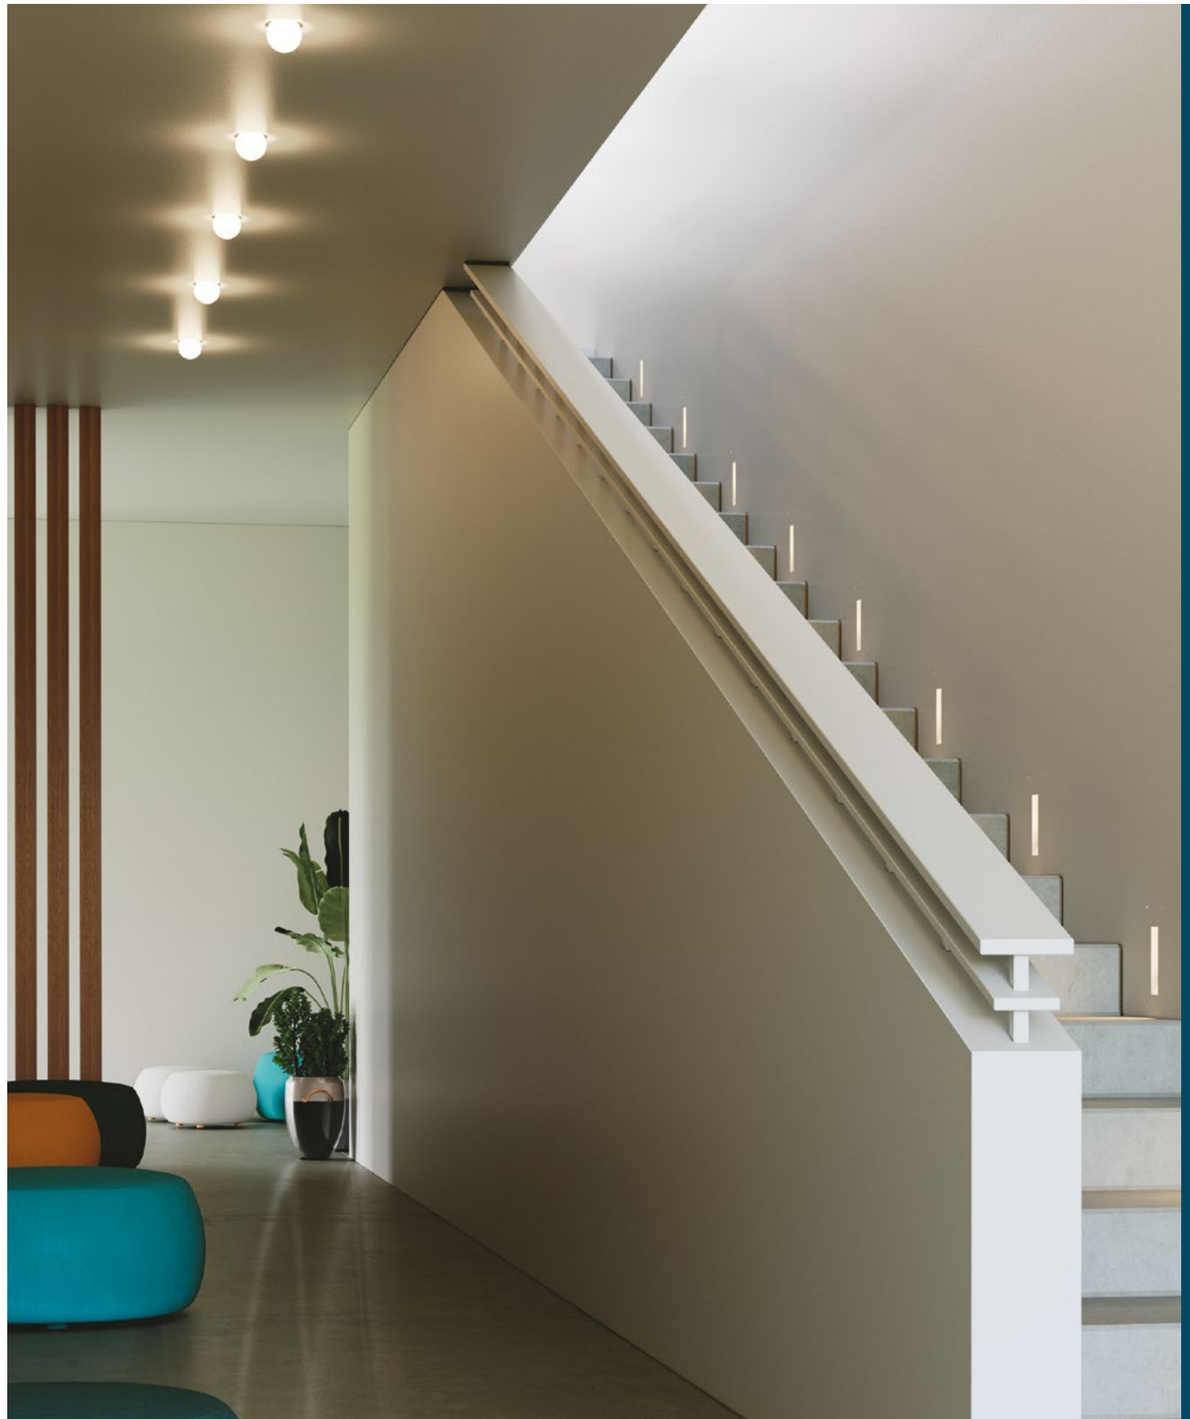

ARIEL

Segnapasso in gesso da integrare nel cartongesso per dare omogeneità tra parete e corpo illuminante

Gypsun wall-light to be integrated into the plasterboard to give homogeneity between the wall and the lighting body



Verniciabile
Paintable

GU10

Attacco sorgente
Light source

ø 34

Misura lampadina
Bulb size







Portalampada incluso
Lamp holder included

I-ARIEL-QL1
8031434151213

1XGU10 MINI MAX 35W

Lampadina non inclusa
Light bulb not included

Misure - size
dimensioni in mm - size mm



Foro - cut out
dimensioni in mm - size mm



Cassa di derivazione opzionale per fissaggio a parete in muratura materiale alluminio
Aluminium optional recess box for brickwork recess installation



I-ARIEL-QL1-BOX
8031414868360







Portalampada incluso
Lamp holder included

I-ARIEL-RS1
8031434131215

1XGU10 MINI MAX 35W

Lampadina non inclusa
Light bulb not included

Misure - size
dimensioni in mm - size mm



Foro - cut out
dimensioni in mm - size mm



Cassa di derivazione opzionale per fissaggio a parete in muratura materiale alluminio
Aluminium optional recess box for brickwork recess installation



I-ARIEL-RS1-BOX
8031414868377







Portalampada incluso
Lamp holder included

I-ARIEL-RM1
8031434121216

1XGU10 MINI MAX 35W

Lampadina non inclusa
Light bulb not included

Misure - size
dimensioni in mm - size mm



Foro - cut out
dimensioni in mm - size mm



Cassa di derivazione opzionale per fissaggio a parete in muratura materiale alluminio
Aluminium optional recess box for brickwork recess installation



I-ARIEL-RM1-BOX
8031414868384



ANIMA

Applique in gesso da integrare nel cartongesso per dare omogeneità tra parete e corpo illuminante

Gypsun wall-light to be integrated into the plasterboard to give homogeneity between the wall and the luminaire body



Verniciabile
Paintable

E14
Attacco sorgente
Light source



I-ANIMA-AP2
8031414861323
2XE14 MAX 14W

Lampadina non inclusa
Light bulb not included

Misure - size
dimensioni in mm - size mm



Foro - cut out
dimensioni in mm - size mm



Cassa di derivazione opzionale per fissaggio a parete in muratura materiale alluminio
Aluminium optional recess box for brickwork recess installation



I-ANIMA-AP2-BOX
8031414868391



VIPER

Strutture incasso IP65 in acciaio e diffusore in vetro satinato

Steel down light frame with satin glass diffuser IP65

IP65

Lampadina non inclusa
Light bulb not included

Portalampada GU10 o MR16 non inclusi
GU10 or MR16 Lamp holder not included





INC-VIPER-R-NIK 8031414861576		Portalampada non incluso *Lamp holder not included*
INC-VIPER-R-BCO 8031414861590		Portalampada non incluso *Lamp holder not included*
		Lampadina non inclusa *Light bulb not included*

Misure - size
dimensioni in mm - size mm



Foro - cut out
dimensioni in mm - size mm



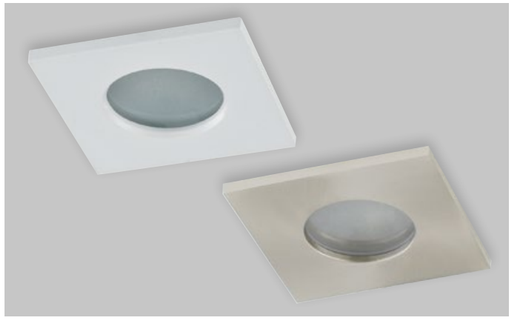

INC-VIPER-Q-NIK 8031414861873		Portalampada non incluso *Lamp holder not included*
INC-VIPER-Q-BCO 8031414861866		Portalampada non incluso *Lamp holder not included*
		Lampadina non inclusa *Light bulb not included*

Misure - size
dimensioni in mm - size mm



Foro - cut out
dimensioni in mm - size mm



AYRIS

Strutture incasso antiriflesso in alluminio nero o bianco goffrato

Antiglare aluminium down light frame embossed black or white

GU10

Attacco sorgente
Light source

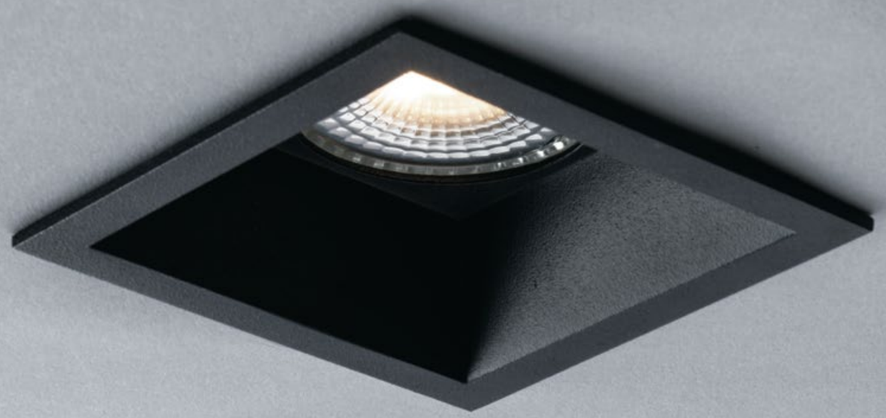



Portalampada incluso
Lampholder included

INC-AYRIS-Q BCO
8031414868223

1XGU10 MAX 35W

Lampadina non inclusa
Light bulb not included

Misure - Size
dimensioni in mm - size mm



Foro - cut out
dimensioni in mm - size mm





Portalampada incluso
Lampholder included

INC-AYRIS-Q NER
8031414868186

1XGU10 MAX 35W

Lampadina non inclusa
Light bulb not included

Misure - Size
dimensioni in mm - size mm



Foro - cut out
dimensioni in mm - size mm



AYRIS

Strutture incasso antiriflesso in alluminio nero o bianco goffrato

Antiglare aluminium down light frame embossed black or white

GU10

Attacco sorgente
Light source





Portalampada incluso
Lampholder included

INC-AYRIS-R BCO
8031414868216

1XGU10 MAX 35W

Lampadina non inclusa
Light bulb not included

Misure - Size
dimensioni in mm - size mm



Foro - cut out
dimensioni in mm - size mm





Portalampada incluso
Lampholder included

INC-AYRIS-R NER
8031414868193

1XGU10 MAX 35W

Lampadina non inclusa
Light bulb not included

Misure - Size
dimensioni in mm - size mm



Foro - cut out
dimensioni in mm - size mm



STENOS

Incasso in termoplastica orientabile quadrato diffusione asimmetrica antiriflesso

Thermoplastic recessed light square frame with asymmetric anti glare light diffuser



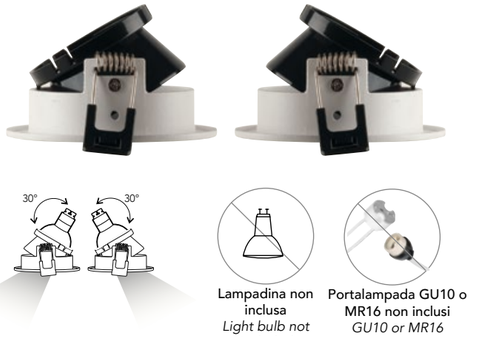

Lampadina non inclusa
Light bulb not included

Portalampada GU10 o MR16 non inclusi
GU10 or MR16
Lamp holder not included



Misure - size
dimensioni in mm - size mm



Foro - cut out
dimensioni in mm - size mm



INC-STENOS-Q-OV
8031414875856

Portalampada non incluso
Lamp holder not included



INC-STENOS-Q-QU
8031414875870

Portalampada non incluso
Lamp holder not included



INC-STENOS-Q-RO
8031414875849

Portalampada non incluso
Lamp holder not included



INC-STENOS-Q-ML
8031414875863

Portalampada non incluso
Lamp holder not included

STENOS

Incasso in termoplastica orientabile quadrato diffusione asimmetrica antiriflesso

Thermoplastic recessed light square frame with asymmetric anti glare light diffuser



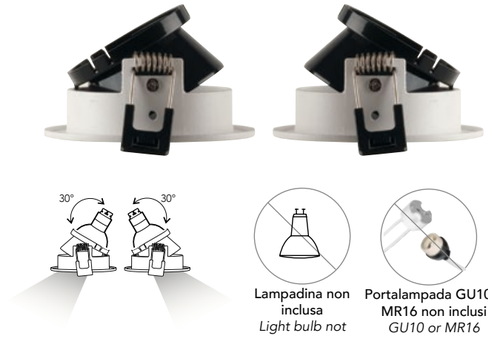

Lampadina non inclusa
Light bulb not included

Portalampada GU10 o MR16 non inclusi
GU10 or MR16
Lamp holder not included



Misure - size
dimensioni in mm - size mm



Foro - cut out
dimensioni in mm - size mm



INC-STENOS-R-OV
8031414875818

Portalampada non incluso
Lamp holder not included



INC-STENOS-R-QU
8031414875832

Portalampada non incluso
Lamp holder not included



INC-STENOS-R-RO
8031414875801

Portalampada non incluso
Lamp holder not included



INC-STENOS-R-ML
8031414875825

Portalampada non incluso
Lamp holder not included

REFLEX

Incasso in metallo

Metal down light



Lampadina non inclusa
Light bulb not included



Portalampada GU10 o MR16 non inclusi
GU10 or MR16 Lamp holder not included

Misure - size
dimensioni in mm - size mm



Foro - cut out
dimensioni in mm - size mm





INC-REFLEX-SF1 BCO
8031439321260

Portalampada non incluso
Lamp holder not included



INC-REFLEX-SF1 NIK
8031439311261

Portalampada non incluso
Lamp holder not included



INC-REFLEX-SF1 BR
8031439331269

Portalampada non incluso
Lamp holder not included



INC-REFLEX-SF1 CR
8031439301262

Portalampada non incluso
Lamp holder not included



INC-REFLEX-SF1 ORO
8031439341268

Portalampada non incluso
Lamp holder not included



INC-REFLEX-SF1 NER
8031414861552

Portalampada non incluso
Lamp holder not included

Misure - size
dimensioni in mm - size mm



Foro - cut out
dimensioni in mm - size mm





INC-REFLEX-Q-SF1 NIK
8031414861545

Portalampada non incluso
Lamp holder not included



INC-REFLEX-Q-SF1 BCO
8031414861538

Portalampada non incluso
Lamp holder not included



INC-REFLEX-Q-SF1 NER
8031414885053

Portalampada non incluso
Lamp holder not included

REFLEX

Incasso in metallo orientabile

Metal down light adjustable



Lampadina non inclusa
Light bulb not included



Portalampada GU10 o MR16 non inclusi
GU10 or MR16 Lamp holder not included



Orientabile 15°
Adjustable 15°

Misure - size
dimensioni in mm - size mm



Foro - cut out
dimensioni in mm - size mm





INC-REFLEX-SM1 BCO
8031439251260

Portalampada non incluso
Lamp holder not included



INC-REFLEX-SM1 NIK
8031439261269

Portalampada non incluso
Lamp holder not included



INC-REFLEX-SM1 BR
8031439291266

Portalampada non incluso
Lamp holder not included



INC-REFLEX-SM1 CR
8031439281267

Portalampada non incluso
Lamp holder not included



INC-REFLEX-SM1 ORO
8031439271268

Portalampada non incluso
Lamp holder not included



INC-REFLEX-SM1 NER
8031414861569

Portalampada non incluso
Lamp holder not included

Misure - size
dimensioni in mm - size mm



Foro - cut out
dimensioni in mm - size mm





INC-REFLEX-Q-SM1 NIK
8031440363280

Portalampada non incluso
Lamp holder not included



INC-REFLEX-Q-SM1 BCO
8031440363310

Portalampada non incluso
Lamp holder not included



INC-REFLEX-Q-SM1 NER
8031414885060

Portalampada non incluso
Lamp holder not included

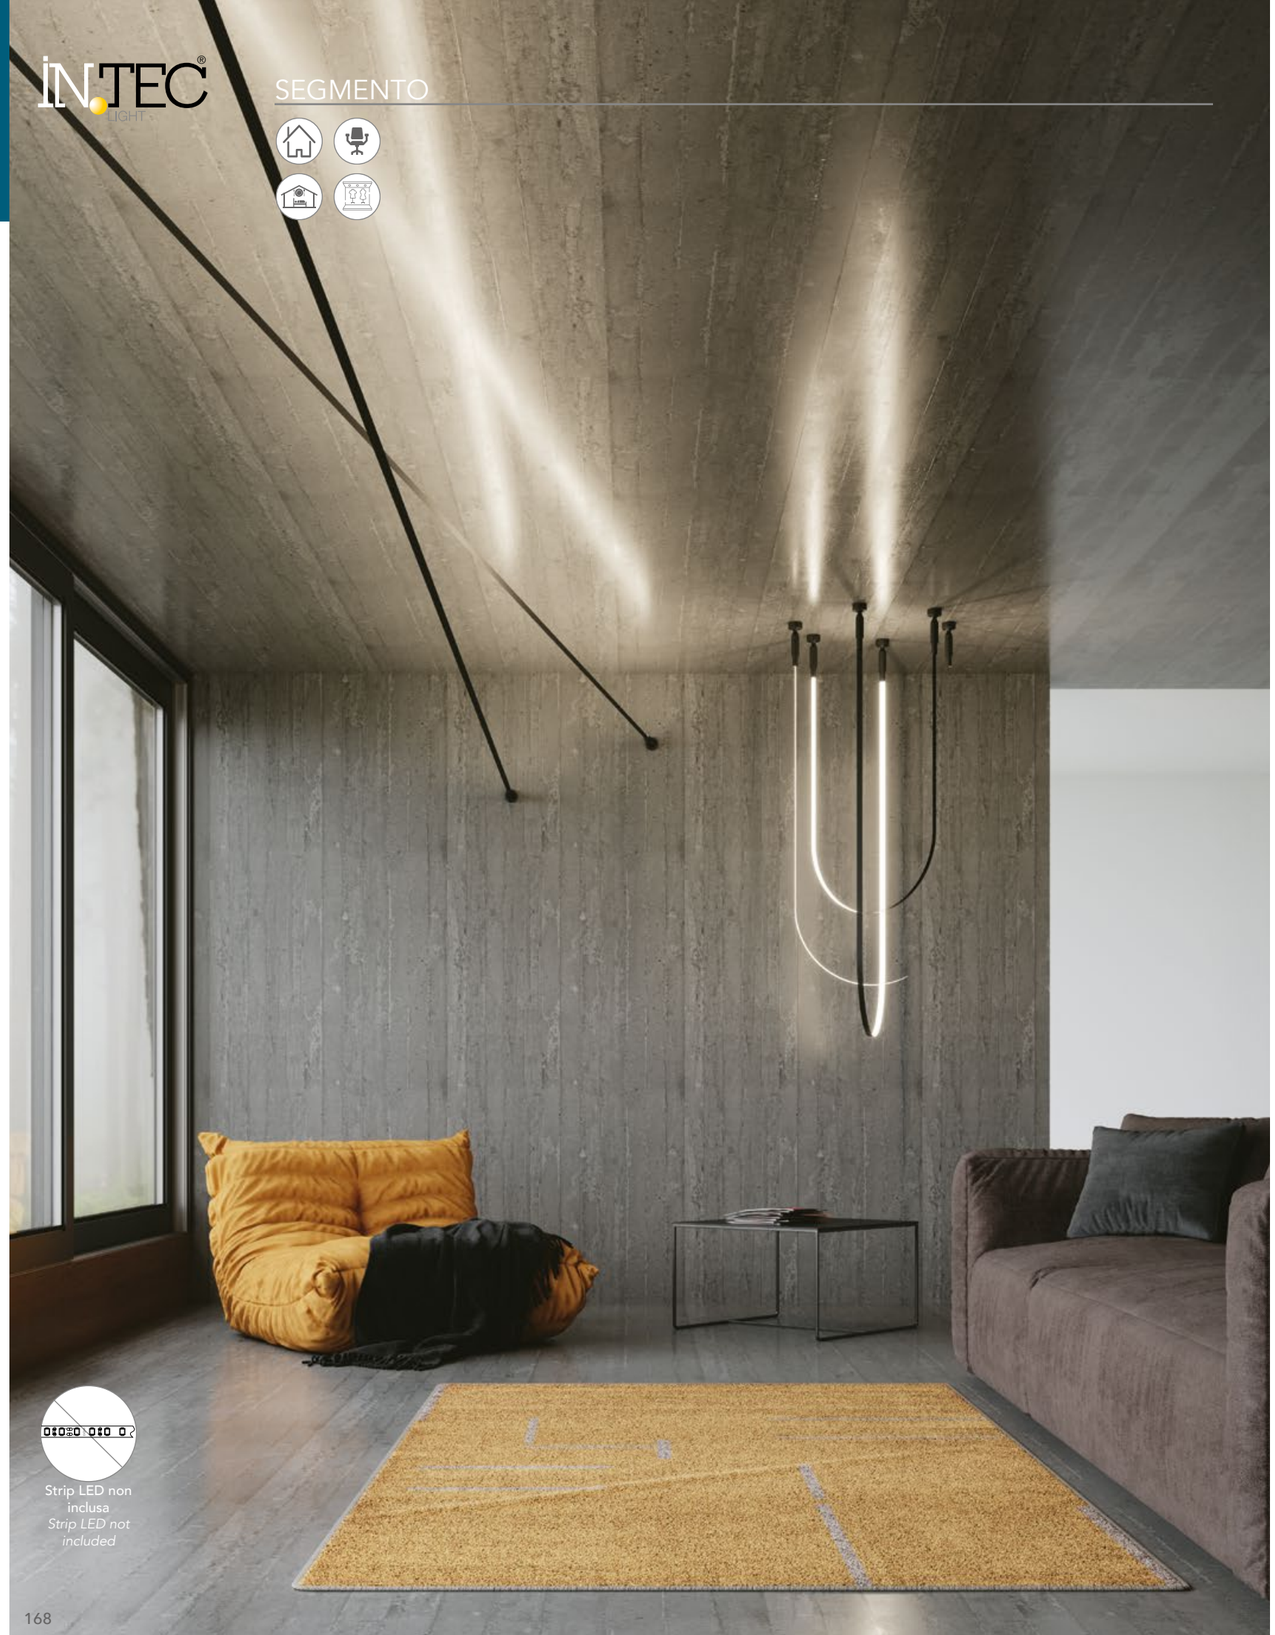

Strip LED non inclusa
Strip LED not included

SEGMENTO

Supporto lineare modulabile in acciaio rivestito in silicone nero

Modular linear support in steel coated in black silicone

Kit completo - Complete kit



I-SEGMENTO-6M
8031414882441

Kit base 6m con nastro tagliabile
6m basic kit with cuttable ribbon

Misure - size
dimensioni in mm - size mm



Accessori inclusi - accessories included





Elementi singoli per comporre il kit - *Single elements to compose the kit*





Servizio customizzato taglio su misura
Customized cut service



I-SEGMENTO-1M
8031414882441

Taglio 1m nastro*
*1m tape cut**

Misure - size
dimensioni in mm - size mm



Indicare la misura desiderata nell note del B2B (multipli di 1 metro)*
*Indicate the desired size in the B2B notes (multiples of 1 meter)**





I-SEGMENTO-FIX
8031414882465

Set di 2 basette ed accessori
Set of 2 bases and accessories

Misure - size
dimensioni in mm - size mm

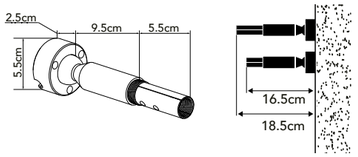



I-SEGMENTO-TOOL
8031414882472

Kit di arnesi
Tool kit

METRO

Sistema cavi tesi finitura cromo.

Wire system chrome finish.

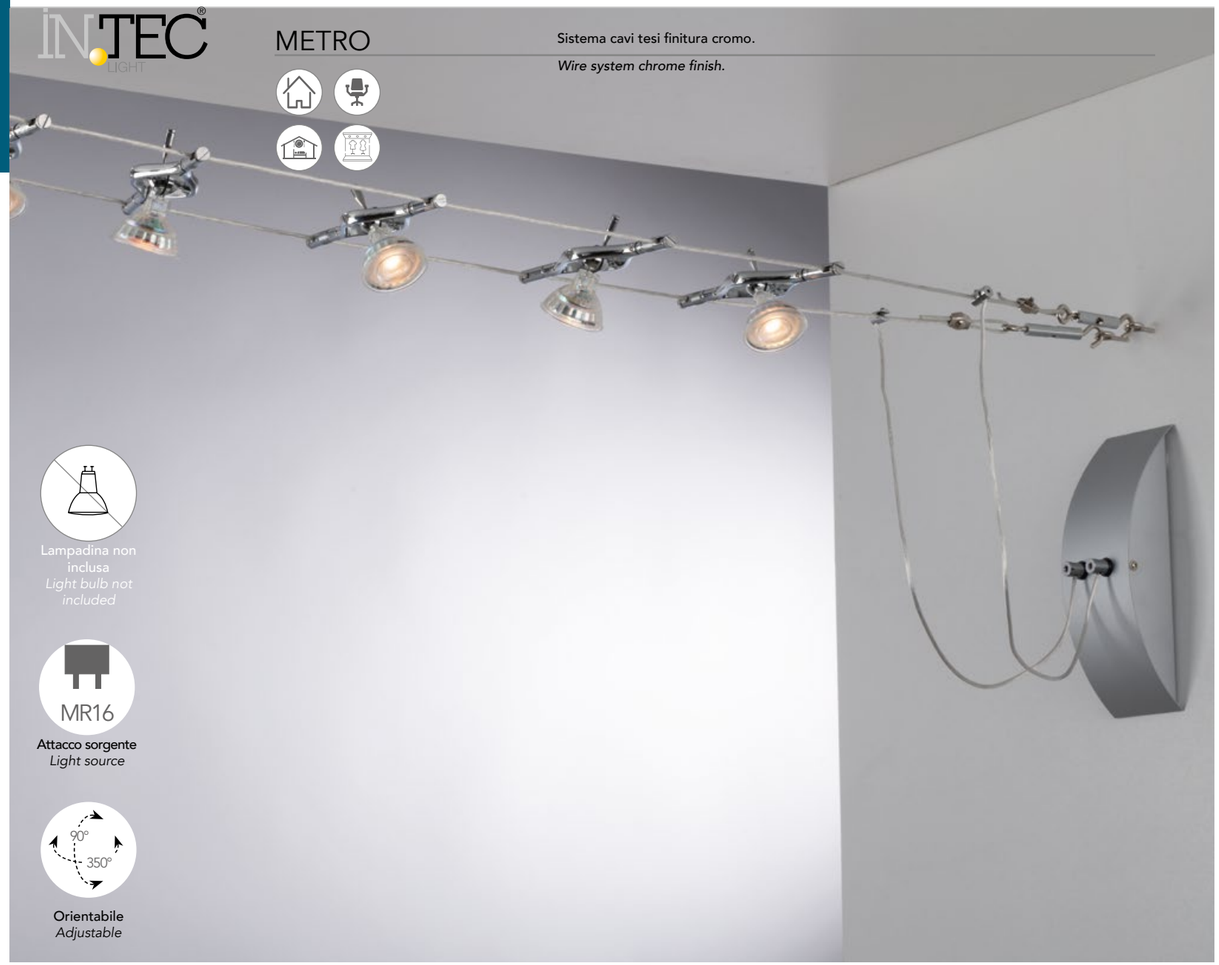

Lampadina non inclusa
Light bulb not included

MR16
Attacco sorgente
Light source

90° 350°
Orientabile
Adjustable



LED-METRO-5 8031414862139	5XMR16 MAX 9W	DRIVER 50W INCLUSO

Lampadina non inclusa
Light bulb not included

Misure - size
dimensioni in mm - size mm

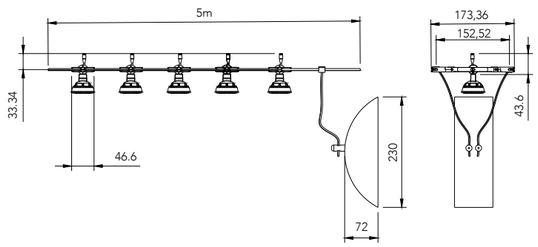

Accessori - accessories

I-WIRE-10M 8031414870387	Cavo 10 metri 10 meters wire



EUCLID

Sistema cavi tesi finitura nikel.

Wire system nikel finish.

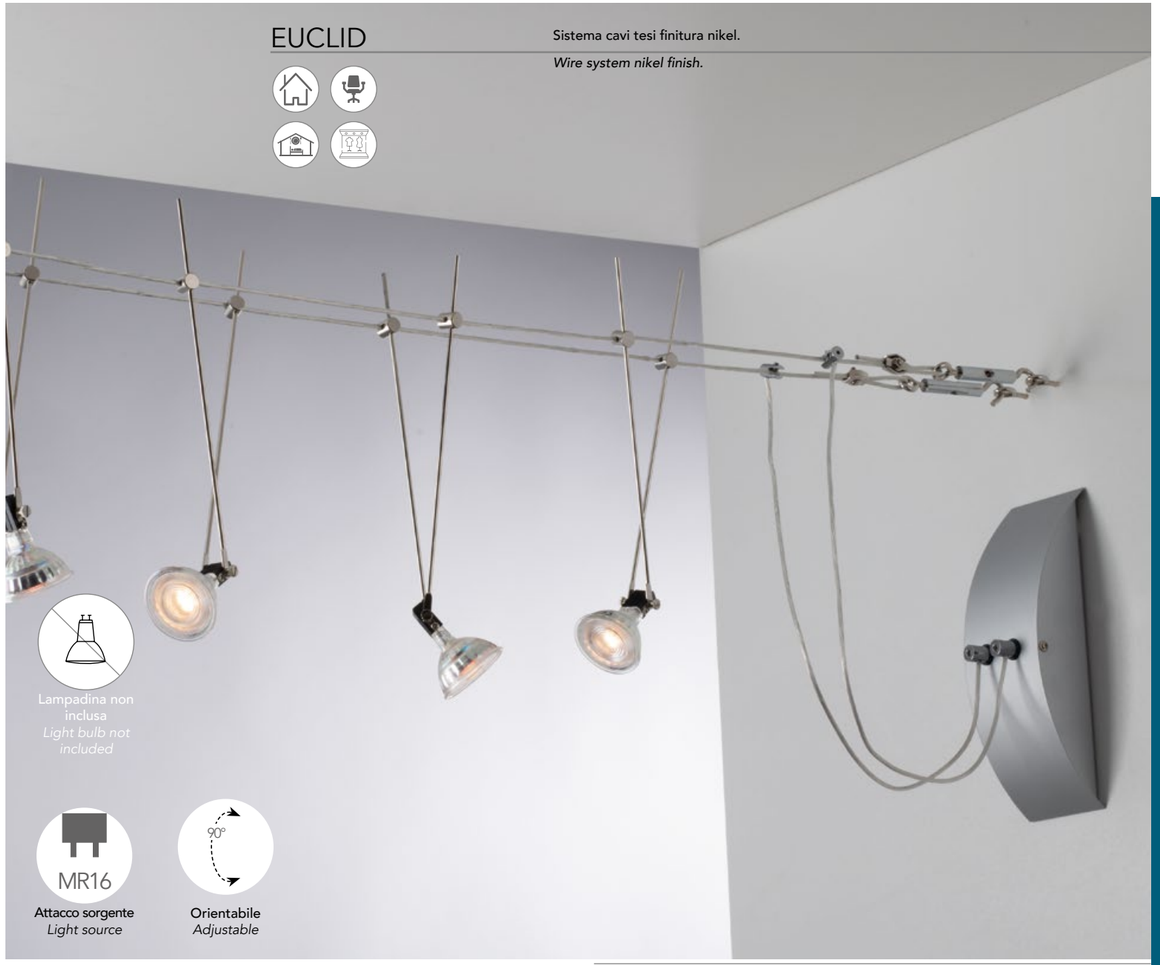

Lampadina non inclusa
Light bulb not included

MR16
Attacco sorgente
Light source

90°
Orientabile
Adjustable



LED-EUCLID-5 8031414862146	5XMR16 MAX 9W	DRIVER 50W INCLUSO

Lampadina non inclusa
Light bulb not included

Misure - size
dimensioni in mm - size mm

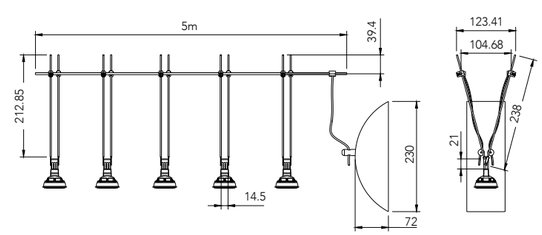

Accessori - accessories

I-WIRE-10M 8031414870387	Cavo 10 metri 10 meters wire



Barra plafoniera o sospensione

Materiale
Alluminio

Colore
Bianco o nero goffrato

Sorgente luminosa
LED SMD 26W - 52W

Driver
incluso

Temperatura colore
4000K

Punti luce
1

Flusso luminoso
2526 Lm - 5052 Lm

Angolo di luce
100°

CRI
>90

LED bar pendant or surface mount ceiling

Material
Alluminium

Colour
Finish embossed white or black

Light source
LED SMD 26W - 52W

Driver
included

Colour temperature
4000K

Number of light sources
1

Luminous Flux
2526 Lm - 5052 Lm

Beam angle
100°

CRI
>90



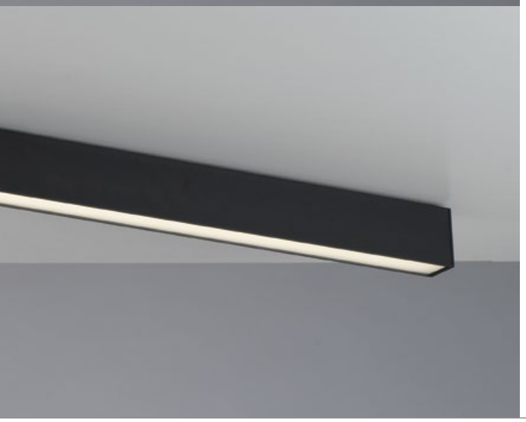



LED-BUILD-B-1M 8031414867899			26W	PF 0,90	2526 LM
LED-BUILD-W-1M 8031414867912			26W	PF 0,90	2526 LM
LED-BUILD-B-2M 8031414867936			52W	PF 0,90	5052 LM
LED-BUILD-W-2M 8031414867950			52W	PF 0,90	5052 LM

Fotometria del Prodotto

Photometric curve of the product



LED-BUILD 1M*

Misure - size
dimensioni in mm - size mm

INCL 1.5 m

KIT CAVI E FISSAGGIO A PLAFONIERA INCLUSI.
METAL BRACKET AND STEEL HANGING WIRE INCLUDED.

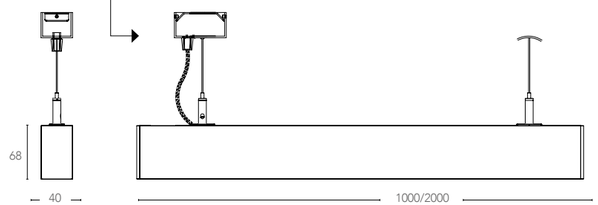

* Le curve fotometriche sopra indicate rappresentano il singolo metro
* Above photometric curve represent the single meter



PANEL

Pannello LED

Materiale
Alluminio, diffusore in acrilico

Colore
Bianco

Sorgente luminosa
LED SMD 40W

Driver
Incluso

Temperatura colore
4000K - 6000K - 3000K

Punti luce
1

Flusso luminoso
4000 Lm

Angolo di luce
120°

CRI
>80

LED panel

Material
Aluminium, acrylic diffuser

Colour
White

Light source
LED SMD 40W

Driver
Included

Colour temperature
4000K - 6000K - 3000K

Number of light sources
1

Luminous Flux
4000 Lm

Beam angle
120°

CRI
>80





LED-PANEL-60X60BK 8031414874323		40W	PF 0,90
LED-PANEL-F-60X60BK 8031414874347		40W	PF 0,90
LED-PANEL-C-60X60BK 8031414885046		40W	PF 0,90

Misure - size
dimensioni in mm - size mm



Fotometria del Prodotto
Photometric curve of the product



LED-PANEL-60X60 BK



LED-PANEL-30X120BK 8031414874316		40W	PF 0,90
LED-PANEL-F-30X120BK 8031414874330		40W	PF 0,90

Misure - size
dimensioni in mm - size mm

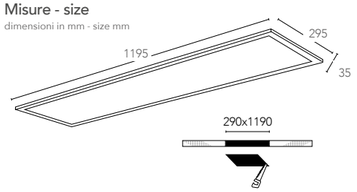



LED-PANEL-30X120 BK

PANEL

Pannello LED

Materiale
Alluminio, diffusore in PMMA

Colore
Finitura bianco

Sorgente luminosa
LED SMD 40W

Driver
Incluso

Temperatura colore
4000K - 6500K

Punti luce
1

Flusso luminoso
4000Lm

Durata e on/off
50.000h - >25.000 on/off

Angolo di luce
110°

CRI
>80

LED panel

Material
Aluminium, PMMA diffuser

Colour
White

Light source
LED SMD 40W

Driver
Included

Colour temperature
4000K - 6500K

Number of light sources
1

Luminous Flux
4000Lm

Lifetime and on/off
50.000h - >25.000 on/off

Beam angle
110°

CRI
>80



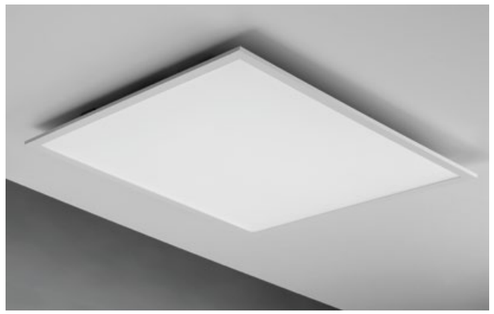

LED-PANEL-60X60-5Y 8031414875344		40W	PF 0,90
LED-PANEL-F-60X60-5Y 8031414875368		40W	PF 0,90

Misure - size
dimensioni in mm - size mm



Fotometria del Prodotto
Photometric curve of the product



LED-PANEL-60X60 5Y



LED-PANEL-30X120-5Y 8031414871773		40W	PF 0,90
LED-PANEL-F-30X120-5Y 8031414874354		40W	PF 0,90

Misure - size
dimensioni in mm - size mm

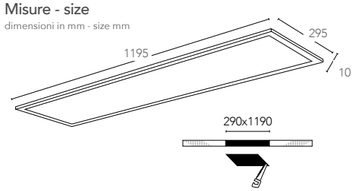



LED-PANEL-30X120 5Y



PANEL

Pannello LED

Materiale
Alluminio, diffusore in acrilico

Colore
Finitura bianco

Sorgente luminosa
LED SMD 40W

Driver
Incluso

Temperatura colore
4000K - 5000K

Punti luce
1

Flusso luminoso
4800Lm

Angolo di luce
120°

CRI
>80

LED panel

Material
Aluminium, acrylic diffuser

Colour
White

Light source
LED SMD 40W

Driver
Included

Colour temperature
4000K - 5000K

Number of light sources
1

Luminous Flux
4800Lm

Beam angle
120°

CRI
>80





LED-PANEL-60X120 8031440361897		60W	4800 Lm	PF 0,90
LED-PANEL-F-60X120 8031440361873		60W	4800 Lm	PF 0,90

Misure - size

dimensioni in mm - size mm

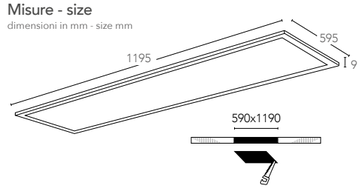

Fotometria del Prodotto

Photometric curve of the product



LED-PANEL-60X120

PANEL UGR

Pannello LED UGR<19

LED panel UGR<19



Materiale
Alluminio, diffusore in acrilico

Material
Aluminium, acrylic diffuser

Colore
Finitura bianco

Colour
White

Sorgente luminosa
LED SMD 40W

Light source
LED SMD 40W

Driver
Incluso

Driver
Included

Temperatura colore
4000K

Colour temperature
4000K

Punti luce
1

Number of light sources
1

UGR
<19

UGR
<19

Flusso luminoso
3600 Lm - 3200 Lm

Luminous Flux
3600 Lm

Angolo di luce
120°

Beam angle
120°

CRI
>80

CRI
>80

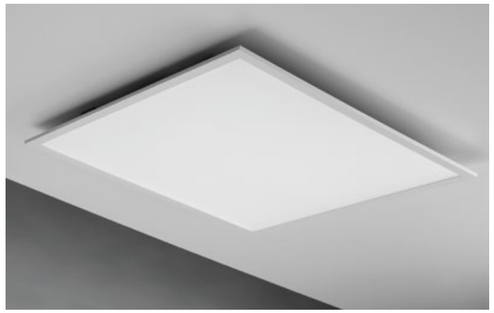

LED-PANEL-60X60-UGR
8031440357524
3600 Lm PF 0,90

Misure - size
dimensioni in mm - size mm



Misure - size
dimensioni in mm - size mm



Fotometria del Prodotto

Photometric curve of the product



LED-PANEL-60X60 UGR



LED-PANEL-30X120-UGR
8031414878444
3200 Lm PF 0,90

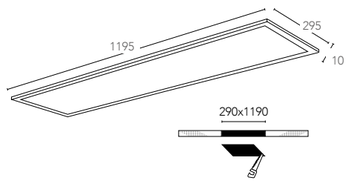



LED-PANEL-30X120
UGR

PANEL UGR

Pannello LED UGR<19

LED panel UGR<19



Materiale
Alluminio, diffusore in PMMA

Material
Aluminium, PMMA diffuser

Colore
Finitura bianco

Colour
White

Sorgente luminosa
LED SMD 36W

Light source
LED SMD 36W

Driver
Incluso

Driver
Included

Temperatura colore
4000K

Colour temperature
4000K

Punti luce
1

Number of light sources
1

UGR
<19

UGR
<19

Flusso luminoso
3240 Lm

Luminous Flux
3240 Lm

Angolo di luce
120°

Beam angle
120°

CRI
>80

CRI
>80



LED-PANEL-60X60-IP65
8031414876303
UGR<19 PF 0,90

Misure - size
dimensioni in mm - size mm





Fotometria del Prodotto

Photometric curve of the product



LED-PANEL-60X60 IP65
UGR

PANEL

Pannello con sistema di variazione intensità luminosa intelligente tramite sensore LUX integrato

Panel light with adjustable light intensity through built-in harvest lux sensor

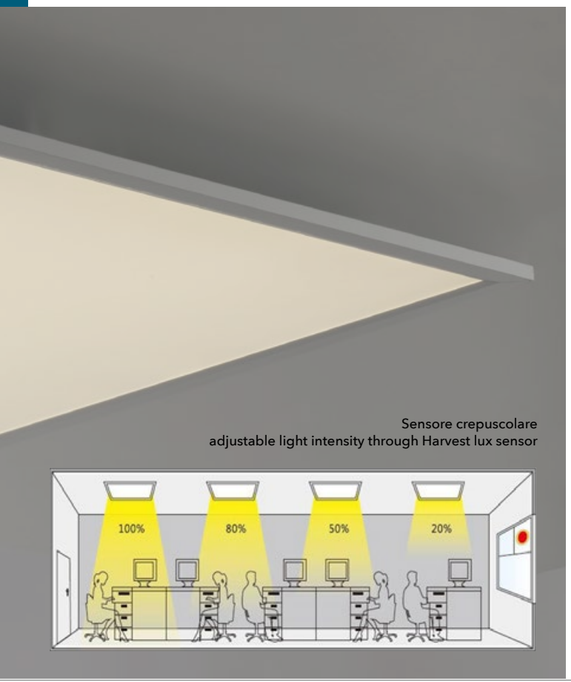

Materiale
Alluminio, diffusore in acrilico

Material
Aluminium, acrylic diffuser

Colore
Finitura bianco

Colour
White

Sorgente luminosa
LED SMD 40W

Light source
LED SMD 40W

Driver
Incluso

Driver
Included

Temperatura colore
4000K

Colour temperature
4000K

Punti luce
1

Number of light sources
1

Flusso luminoso
4000 Lm

Luminous Flux
4000 Lm

Angolo di luce
120°

Beam angle
120°

CRI
>80

CRI
>80

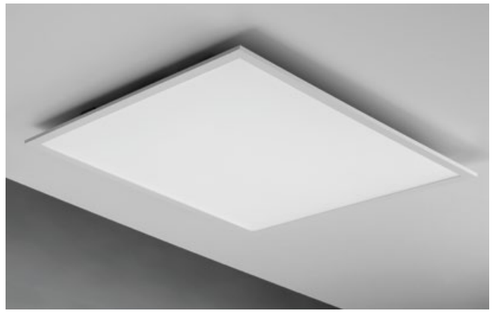

LED-PANEL-60X60-SENS
8031414861897
40W **PF 0,90**

Misure - size
dimensioni in mm - size mm



Fotometria del Prodotto
Photometric curve of the product



LED-PANEL-60X60-SENS



LED-PANEL-30X120-SENS
8031414861880
40W **PF 0,90**

Misure - size
dimensioni in mm - size mm

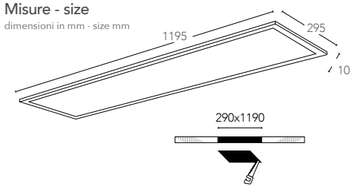



LED-PANEL-30X120-SENS

PANEL

Pannello con sistema di variazione intensità di luce in 3 step tramite interruttore

Panel light with three step dimmer by switch

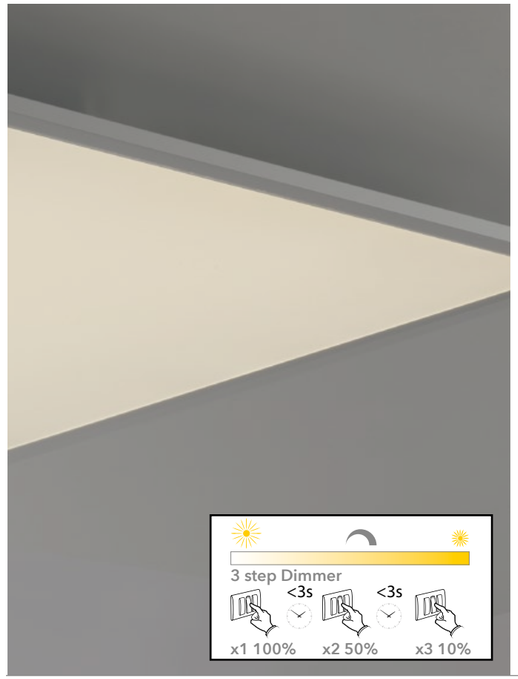

Materiale
Alluminio, diffusore in acrilico

Material
Aluminium, acrylic diffuser

Colore
Finitura bianco

Colour
White

Sorgente luminosa
LED SMD 40W

Light source
LED SMD 40W

Driver
Incluso

Driver
Included

Temperatura colore
4000K

Colour temperature
4000K

Punti luce
1

Number of light sources
1

Dimmer
3 step dimmer (x1 100%, x2 50%; x3 10%)

Dimmer
3 step dimmer (x1 100%, x2 50%; x3 10%)

Flusso luminoso
3600 Lm max

Luminous Flux
3600 Lm max

Angolo di luce
120°

Beam angle
120°

CRI
>80

CRI
>80

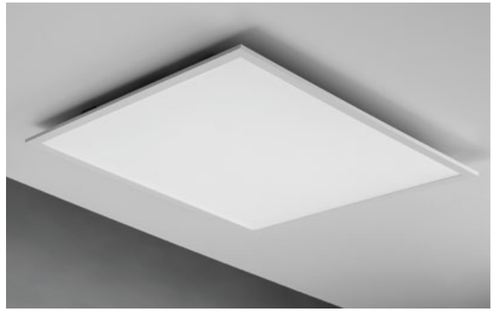

LED-PANEL-60x60-DIM
8031414861026
40W **PF 0,90**

Misure - size
dimensioni in mm - size mm



Fotometria del Prodotto
Photometric curve of the product



LED-PANEL-60X60-DIM



LED-PANEL-30x120-DIM
8031414861033
40W **PF 0,90**

Misure - size
dimensioni in mm - size mm

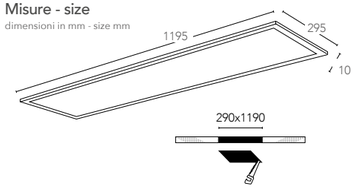



LED-PANEL-30X120-DIM

PANEL

Pannello con sistema di variazione colorazione luce RGB e luce bianca, con radiocomando (incluso)

Panel light RGB and natural white light adjustable with radio frequency remote control (included)

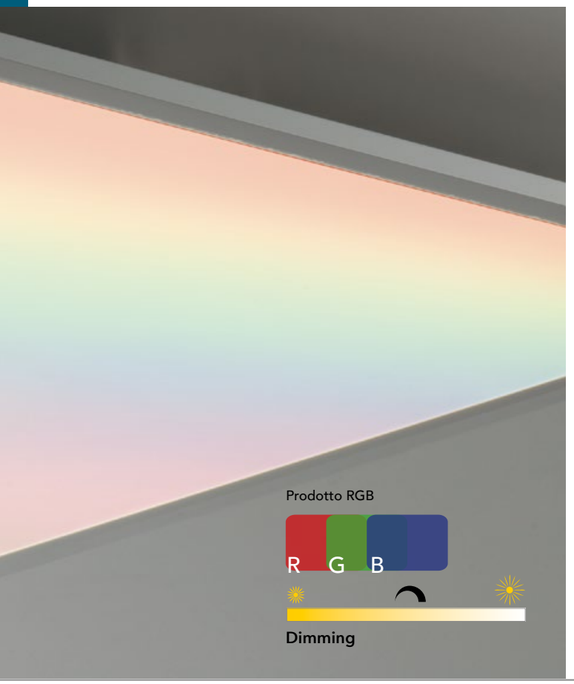

Materiale
Alluminio, diffusore in acrilico

Material
Aluminium, acrylic diffuser

Colore
Finitura bianco

Colour
White

Sorgente luminosa
LED SMD 40W

Light source
LED SMD 40W

Driver
Incluso

Driver
Included

Temperatura colore
RGB + 4000K

Colour temperature
RGB + 4000K

Dimmer
Dimmerabile con radiocomando (incluso)

Dimmer
Dimmable with radio frequency remote control (included)

Punti luce
1

Number of light sources
1

Flusso luminoso
3000 Lm

Luminous Flux
3000 Lm

Angolo di luce
120°

Beam angle
120°

CRI
>80

CRI
>80

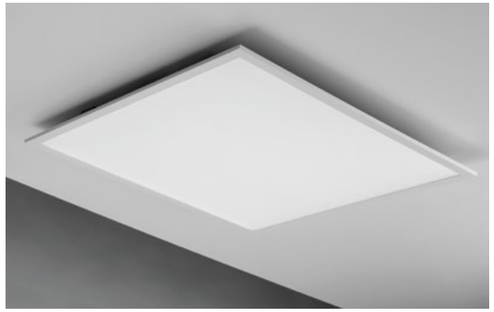

LED-PANEL-60x60-RGBW 8031414861064 — **40W** — **PF 0,90**

Misure - size
dimensioni in mm - size mm



Fotometria del Prodotto
Photometric curve of the product



LED-PANEL-60x60-R-GBW

Accessori inclusi
Included accessories

Telecomando incluso
Remote control included

PANEL

Pannello con sistema di variazione gradi Kelvin e intensità di luce, con radiocomando (incluso)

Panel light adjustable kelvin and luminous flux with radio frequency remote control (included)

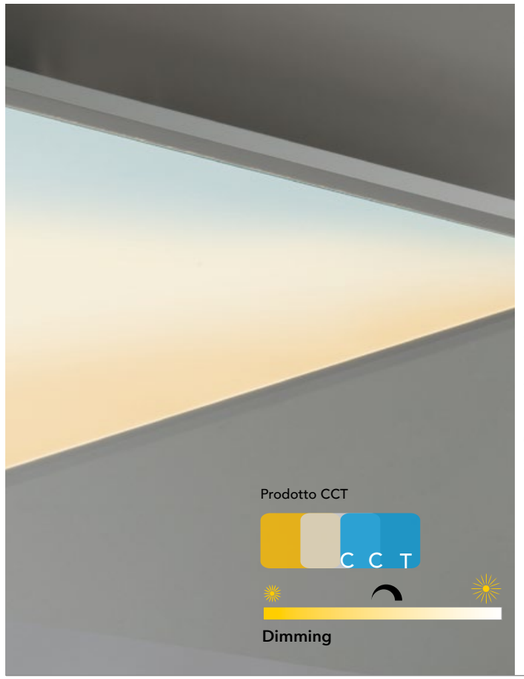

Materiale
Alluminio, diffusore in acrilico

Material
Aluminium, acrylic diffuser

Colore
Finitura bianco

Colour
White

Sorgente luminosa
LED SMD 40W

Light source
LED SMD 40W

Driver
Incluso

Driver
Included

Temperatura colore
CCT

Colour temperature
CCT

Dimmer
Dimmerabile con radiocomando (incluso)

Dimmer
Dimmable with radio frequency remote control (included)

Flusso luminoso
3600 Lm

Luminous Flux
3600 Lm

Angolo di luce
120°

Beam angle
120°

CRI
>80

CRI
>80

VIDEO TUTORIAL LED-PANEL-CCT

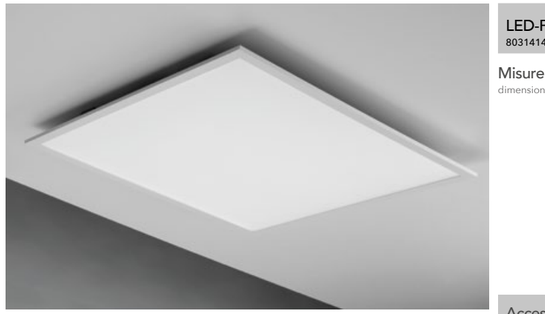

LED-PANEL-60x60-CCT 8031414861040 — **40W** — **PF 0,90**

Misure - size
dimensioni in mm - size mm



Fotometria del Prodotto
Photometric curve of the product



LED-PANEL-60x60-CCT

Accessori inclusi
Included accessories

Telecomando incluso
Remote control included



LED-PANEL-30x120-CCT 8031414861057 — **40W** — **PF 0,90**

Misure - size
dimensioni in mm - size mm

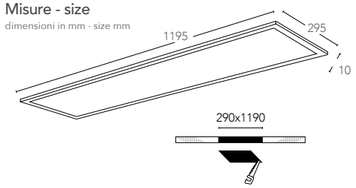



LED-PANEL-30x120-CCT

Accessori inclusi
Included accessories

Telecomando incluso
Remote control included

PANEL

Pannello con doppia emissione di luce

Panel with double emiting light



Materiale
Alluminio, diffusore in acrilico

Material
Aluminium, acrylic diffuser

Colore
Finitura bianco

Colour
White

Sorgente luminosa
LED SMD 40W

Light source
LED SMD 40W

Driver
Incluso

Driver
Included

Temperatura colore
4000K

Colour temperature
4000K

Punti luce
1

Number of light sources
1

Flusso luminoso
4000 Lm (↑ 2000 + ↓ 2000)

Luminous Flux
4000 Lm (↑ 2000 + ↓ 2000)

Angolo di luce
↑ 110° + ↓ 110°

Beam angle
↑ 110° + ↓ 110°

CRI
>80

CRI
>80





LED-PANEL-60X60-BIS 8031414865383 — 40W — PF 0,90

Kit cavi acciaio ed elettrico1,5 metri INCLUSI.
steel hanging cable and electric cable 1,5 meters INCLUDED

Misure - size
dimensioni in mm - size mm



Fotometria del Prodotto
Photometric curve of the product



LED-PANEL-60X60-BIS



LED-PANEL-30X120-BIS 8031414865376 — 40W — PF 0,90

Kit cavi acciaio ed elettrico1,5 metri INCLUSI.
steel hanging cable and electric cable 1,5 meters INCLUDED

Misure - size
dimensioni in mm - size mm

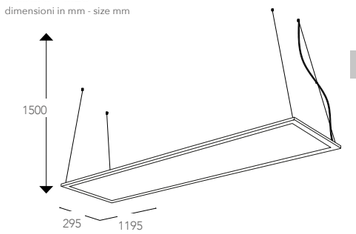

Fotometria del Prodotto
Photometric curve of the product



LED-PANEL-30X120-BIS

Accessorio base soffitto per driver - ***Metal canopy base for LED panel*** LED-PANEL-BASE

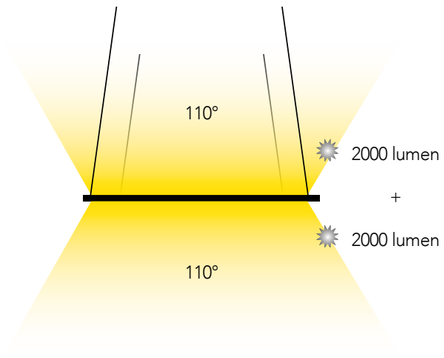

PANEL STRUTTURA

Struttura in alluminio per montaggio a plafoniera per pannello LED

Aluminum structure for panel light surface mount

Materiale

Alluminio

Material

Aluminum

Colore

Finitura bianco goffrato, grigio goffrato o nero goffrato

Color

Embossed white, grey or black



LED-PANEL-60X60-MT 8031414866212	Struttura per pannello LED *Aluminum frame for LED panel*
LED-PANEL-60X60-MT GR 8031414871452	Struttura per pannello LED *Aluminum frame for LED panel*
LED-PANEL-60X60-MT NER 8031414871469	Struttura per pannello LED *Aluminum frame for LED panel*

Misure - size
dimensioni in mm - size mm



LED-PANEL-60X120-MT 8031414869176	Struttura per pannello LED *Aluminum frame for LED panel*

Misure - size
dimensioni in mm - size mm





LED-PANEL-30X120-MT 8031414866199	Struttura per pannello LED *Aluminum frame for LED panel*
LED-PANEL-30X120-MT GR 8031414871506	Struttura per pannello LED *Aluminum frame for LED panel*
LED-PANEL-30X120-MT NER 8031414871476	Struttura per pannello LED *Aluminum frame for LED panel*

Misure - size
dimensioni in mm - size mm



PANEL ACCESSORI



LED-PANEL-KIT 8031440352451	Kit 6 cavi 150 cm in acciaio per sospensione *Steel cable kit 150 cm for sospension*





LED-PANEL-GANCI 8031440361903	Kit molle 4pz. *Metal spring kit 4pcs.*





LED-PANEL-STAFFE 8031414866175	Kit 6 staffe in acciaio per pannello LED *Steel fixing bars for LED panel*





LED-PANEL-BASE 8031414866236	Base a soffitto per driver pannello LED - Misure - size 160x110x35mm *Metal canopy base for LED panel*





LED-PANEL-SOSP 8031440361781	Kit sospensione pannello cavo 1,5 m + scatola di connessione elettrica a soffitto 120x120x60 mm *kit for sospension with 1,5 m cable + metal canopy with electric connection* 120x120x60 mm

PANEL

Pannello con speaker bluetooth , sistema di variazione gradi Kelvin e di intensità di luce regolabili con radiocomando (incluso).

Materiale
Alluminio, diffusore in acrilico

Colore
Finitura bianco

Sorgente luminosa
LED SMD 42W - 23W

Driver
Incluso

Speaker
2x5W
connessione bluetooth 4.2 max 10 metri

Temperatura colore
CCT

Dimmer
Dimmerabile con radiocomando (incluso)

Punti luce
1

Flusso luminoso
3360 Lm - 1840 Lm

Angolo di luce
120°

CRI
>80

Panel light with bluetooth speaker, adjustable kelvin and luminous flux with radio frequency remote control (included).

Material
Aluminium, acrylic diffuser

Colour
White

Light source
LED SMD 42W - 23W

Driver
Included

Speaker
2x5W
bluetooth 4.2 connection max 10 meters

Colour temperature
CCT

Dimmer
Dimmable with radio frequency remote control (included)

Number of light sources
1

Luminous Flux
3360 Lm - 1840 Lm

Beam angle
120°

CRI
>80









Speaker
2x5W
connessione bluetooth 4.2 max 10 metri
2x5W
bluetooth 4.2 connection max 10 meters

LED-PANEL-60X60-DJ
8031414876242 **42W**

RADIOCOMANDO INCLUSO

REMOTE CONTROL INCLUDED



Misure - size
dimensioni in mm - size mm



Fotometria del Prodotto
Photometric curve of the product



LED-PANEL-60X60-DJ





Speaker
2x5W
connessione bluetooth 4.2 max 10 metri
2x5W
bluetooth 4.2 connection max 10 meters

LED-PANEL-30X60-DJ
8031414876259 **23W**

RADIOCOMANDO INCLUSO

REMOTE CONTROL INCLUDED



Misure - size
dimensioni in mm - size mm



Fotometria del Prodotto
Photometric curve of the product



LED-PANEL-30X60-DJ

KLIO

Plafoniera in alluminio pressofuso

Materiale

Alluminio, diffusore in acrilico

Colore

Bianco o nero goffrato

Sorgente luminosa

LED SMD 16W - 22W - 36W - 64,8W

Driver

Incluso

Temperatura colore

3000K - 4000K

Punti luce

1

Flusso luminoso

- 1300 Lm - 1300 Lm
- 2200 Lm - 2000Lm
- 3600 Lm - 2900 Lm
- 5500 Lm - 6200 Lm

Angolo di luce

120°

CRI

>80

Aluminium ceiling lamp

Material

Aluminium, acrilic diffuser

Colour

Embossed white or black

Light source

LED SMD 16W - 22W - 36W - 64,8W

Driver

Included

Colour temperature

3000K - 4000K

Number of light sources

1

Luminous Flux

- 1300 Lm - 1300 Lm
- 2200 Lm - 2000Lm
- 3600 Lm - 2900 Lm
- 5500 Lm - 6200 Lm

Beam angle

120°

CRI

>80





LED-KLIO-Q11 NER 8031414868001	16W	1300 LM	
LED-KLIO-Q11C 8031414875672	16W	1300 LM	
LED-KLIO-Q11 8031440363563	16W	1300 LM	

Misure - size - Size
dimensioni in mm - size mm





LED-KLIO-Q17 NER 8031414868018	22W	2000 LM	
LED-KLIO-Q17C 8031414875689	22W	2200 LM	
LED-KLIO-Q17 8031440363570	22W	2000 LM	

Misure - size - Size
dimensioni in mm - size mm





LED-KLIO-Q21 NER 8031414868025	36W	2900 LM	PF 0,90	
LED-KLIO-Q21C 8031414875696	36W	3600 LM	PF 0,90	
LED-KLIO-Q21 8031440363549	36W	2900 LM	PF 0,90	

Misure - size - Size
dimensioni in mm - size mm





LED-KLIO-Q40 NER 8031414868063	64,8W	6200 LM	PF 0,90	
LED-KLIO-Q40C 8031414875702	64,8W	5500 LM	PF 0,90	
LED-KLIO-Q40 8031414868070	64,8W	6200 LM	PF 0,90	

Misure - size - Size
dimensioni in mm - size mm



Fotometria del Prodotto

Photometric curve of the product

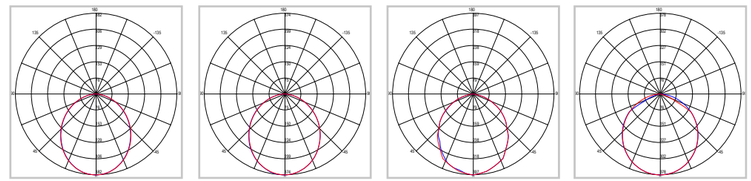

LED-KLIO-Q11 LED-KLIO-Q17 LED-KLIO-Q21 LED-KLIO-Q40

KLIO

Plafoniera in alluminio pressofuso

Materiale

Alluminio, diffusore in acrilico

Colore

Bianco o nero goffrato

Sorgente luminosa

LED SMD 16W - 22W - 36W - 64,8W

Driver

Incluso

Temperatura colore

3000K - 4000K

Punti luce

1

Flusso luminoso

1100 Lm - 1300 Lm
2200 Lm - 2000Lm
3600 Lm - 2900 Lm
5500 Lm - 6200 Lm

Angolo di luce

120°

CRI

>80

Aluminium ceiling lamp

Material

Aluminium, acrilic diffuser

Colour

Embossed white or black

Light source

LED SMD 16W - 22W - 36W - 64,8W

Driver

Included

Colour temperature

3000K - 4000K

Number of light sources

1

Luminous Flux

1100 Lm - 1300 Lm
2200 Lm - 2000Lm
3600 Lm - 2900 Lm
5500 Lm - 6200 Lm

Beam angle

120°

CRI

>80





LED-KLIO-R11 NER 8031414868032	16W	1300 LM	
LED-KLIO-R11C 8031414875719	16W	1100 LM	
LED-KLIO-R11 8031440358675	16W	1300 LM	

Misure - size - Size
dimensioni in mm - size mm





LED-KLIO-R17 NER 8031414868049	22W	2000 LM	
LED-KLIO-R17C 8031414875726	22W	2200 LM	
LED-KLIO-R17 8031440363587	22W	2000 LM	

Misure - size - Size
dimensioni in mm - size mm





LED-KLIO-R21 NER 8031414868056	36W	2900 LM	PF 0,90	
LED-KLIO-R21C 8031414875733	36W	3600 LM	PF 0,90	
LED-KLIO-R21 8031440363594	36W	2900 LM	PF 0,90	

Misure - size - Size
dimensioni in mm - size mm





LED-KLIO-R40 NER 8031414868094	64,8W	6200 LM	PF 0,90	
LED-KLIO-R40C 8031414875740	64,8W	5500 LM	PF 0,90	
LED-KLIO-R40 8031414868087	64,8W	6200 LM	PF 0,90	

Misure - size - Size
dimensioni in mm - size mm



Fotometria del Prodotto

Photometric curve of the product

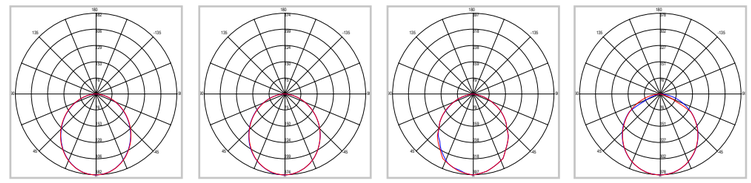

LED-KLIO-R11 LED-KLIO-R17 LED-KLIO-R21 LED-KLIO-R40

MIG

Plafoniera anti abbagliamento

Anti glare ceiling lamp



Materiale
Struttura in alluminio riflettore in acrilico

Colore
Bianco goffrato con riflettore cromato
nero goffrato con riflettore nero lucido

Sorgente luminosa
LED COB 20W

Driver
Incluso

Temperatura colore
3000K - 4000K

Punti luce
1

Flusso luminoso
2000Lm

Durata e on/off
50.000 h ~ >25.000 on/off

Angolo di luce
45°

CRI
>90

Material
Aluminium structure with acrylic reflector

Colour
Embossed white with chrome reflector
Embossed black with glossy black reflector

Light source
COB LED 20W

Driver
Included

Colour temperature
3000K - 4000K

Number of light sources
1

Luminous Flux
2000Lm

Lifetime and and on/off
50.000 h ~ >25.000 on/off

Beam angle
45°

CRI
>90



LED-MIG-R20 BCO 8031414866823		20W	2000 LM	PF 0,90	UGR<19
LED-MIG-R20 NER 8031414866717		20W	2000 LM	PF 0,90	UGR<19
LED-MIG-R20C BCO 8031414874064		20W	2000 LM	PF 0,90	UGR<19
LED-MIG-R20C NER 8031414874057		20W	2000 LM	PF 0,90	UGR<19

Misure - size
dimensioni in mm - size mm





LED-MIG R 20W



LED-MIG-Q20 BCO 8031414870981		20W	2000 LM	PF 0,90	UGR<19
LED-MIG-Q20 NER 8031414866731		20W	2000 LM	PF 0,90	UGR<19
LED-MIG-Q20C BCO 8031414874118		20W	2000 LM	PF 0,90	UGR<19
LED-MIG-Q20C NER 8031414874101		20W	2000 LM	PF 0,90	UGR<19

Misure - size
dimensioni in mm - size mm





LED-MIG Q 20W

GENESIS

Plafoniera per lampade GU10

Ceiling lamp for GU10



Materiale
Alluminio

Colore
Bianco o nero matto

Sorgente luminosa
1xGU10

Punti luce
1

Material
Alluminium

Colour
Matt white or black

Light source
1xGU10

Number of light sources
1



I-GENESIS-R6-BCO 8031414883202		1XGU10 MAX 35W	Lampadina non inclusa *Light bulb not included*
I-GENESIS-R6-NER 8031414883219		1XGU10 MAX 35W	Lampadina non inclusa *Light bulb not included*

Misure - size
dimensioni in mm - size mm



TOWN

Plafoniera per lampade GU10

Ceiling lamp for GU10

GU10

Attacco sorgente
Lampholder

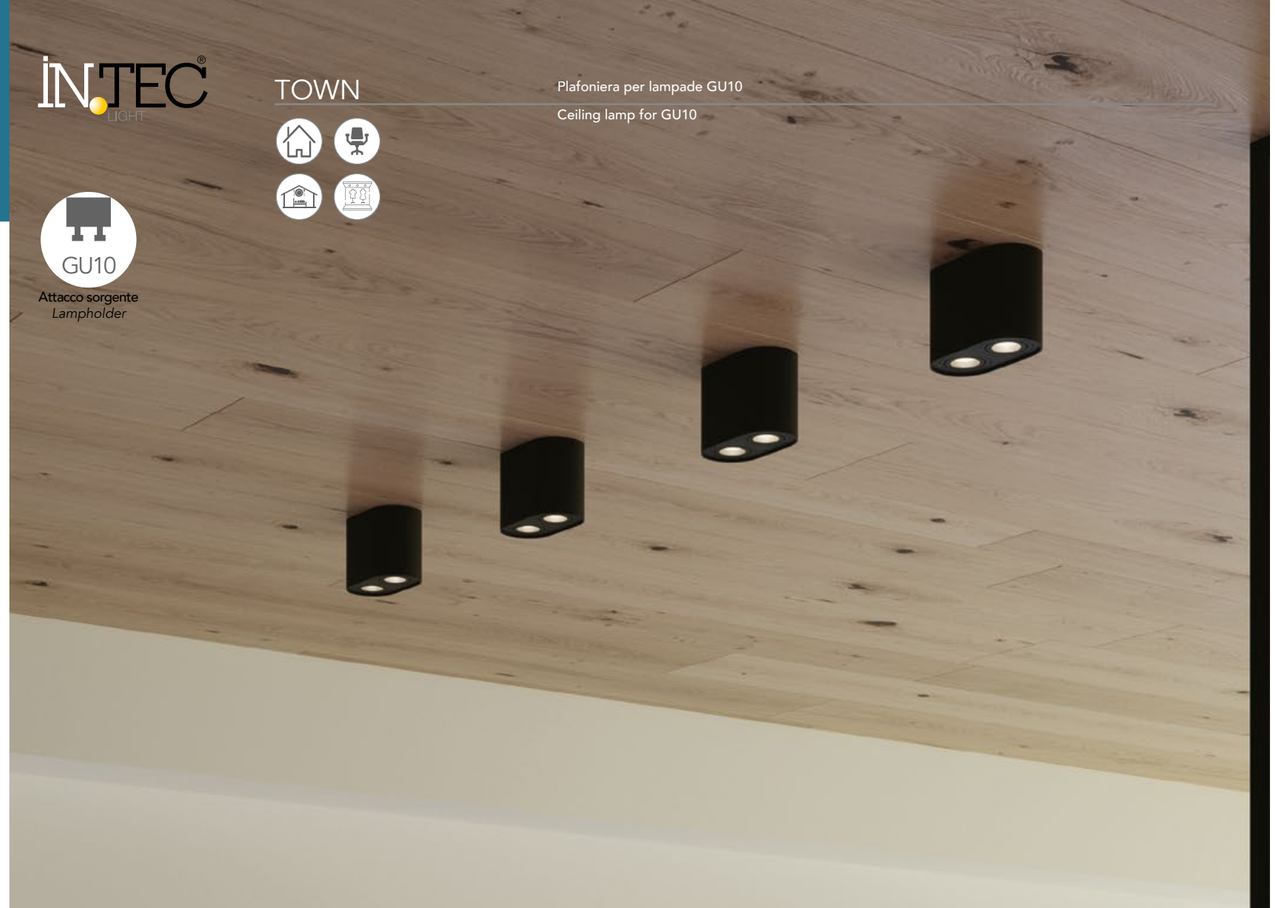





I-TOWN-R BCO 8031414868179		1XGU10 MAX 35W	Lampadina non inclusa *Light bulb not included*
I-TOWN-R NER 8031414868162		1XGU10 MAX 35W	Lampadina non inclusa *Light bulb not included*

Misure - size
dimensioni in mm - size mm





I-TOWN-Q BCO 8031414868155		1XGU10 MAX 35W	Lampadina non inclusa *Light bulb not included*
I-TOWN-Q NER 8031414868148		1XGU10 MAX 35W	Lampadina non inclusa *Light bulb not included*

Misure - size
dimensioni in mm - size mm





I-TOWN-R2 BCO 8031414883189		2XGU10 MAX 35W	Lampadina non inclusa *Light bulb not included*
I-TOWN-R2 NER 8031414883196		2XGU10 MAX 35W	Lampadina non inclusa *Light bulb not included*

Misure - size
dimensioni in mm - size mm





I-TOWN-Q2 BCO 8031414883165		2XGU10 MAX 35W	Lampadina non inclusa *Light bulb not included*
I-TOWN-Q2 NER 8031414883172		2XGU10 MAX 35W	Lampadina non inclusa *Light bulb not included*

Misure - size
dimensioni in mm - size mm



XICO

Plafoniera in gesso verniciabile con ghiere nere lucide e con interruttore per regolazione kelvin.

Paintable plaster ceiling lamp with glossy black metal decorative rings and with switch for kelvin adjustment.

Verniciabile
Paintable

Sorgente luminosa
Light source

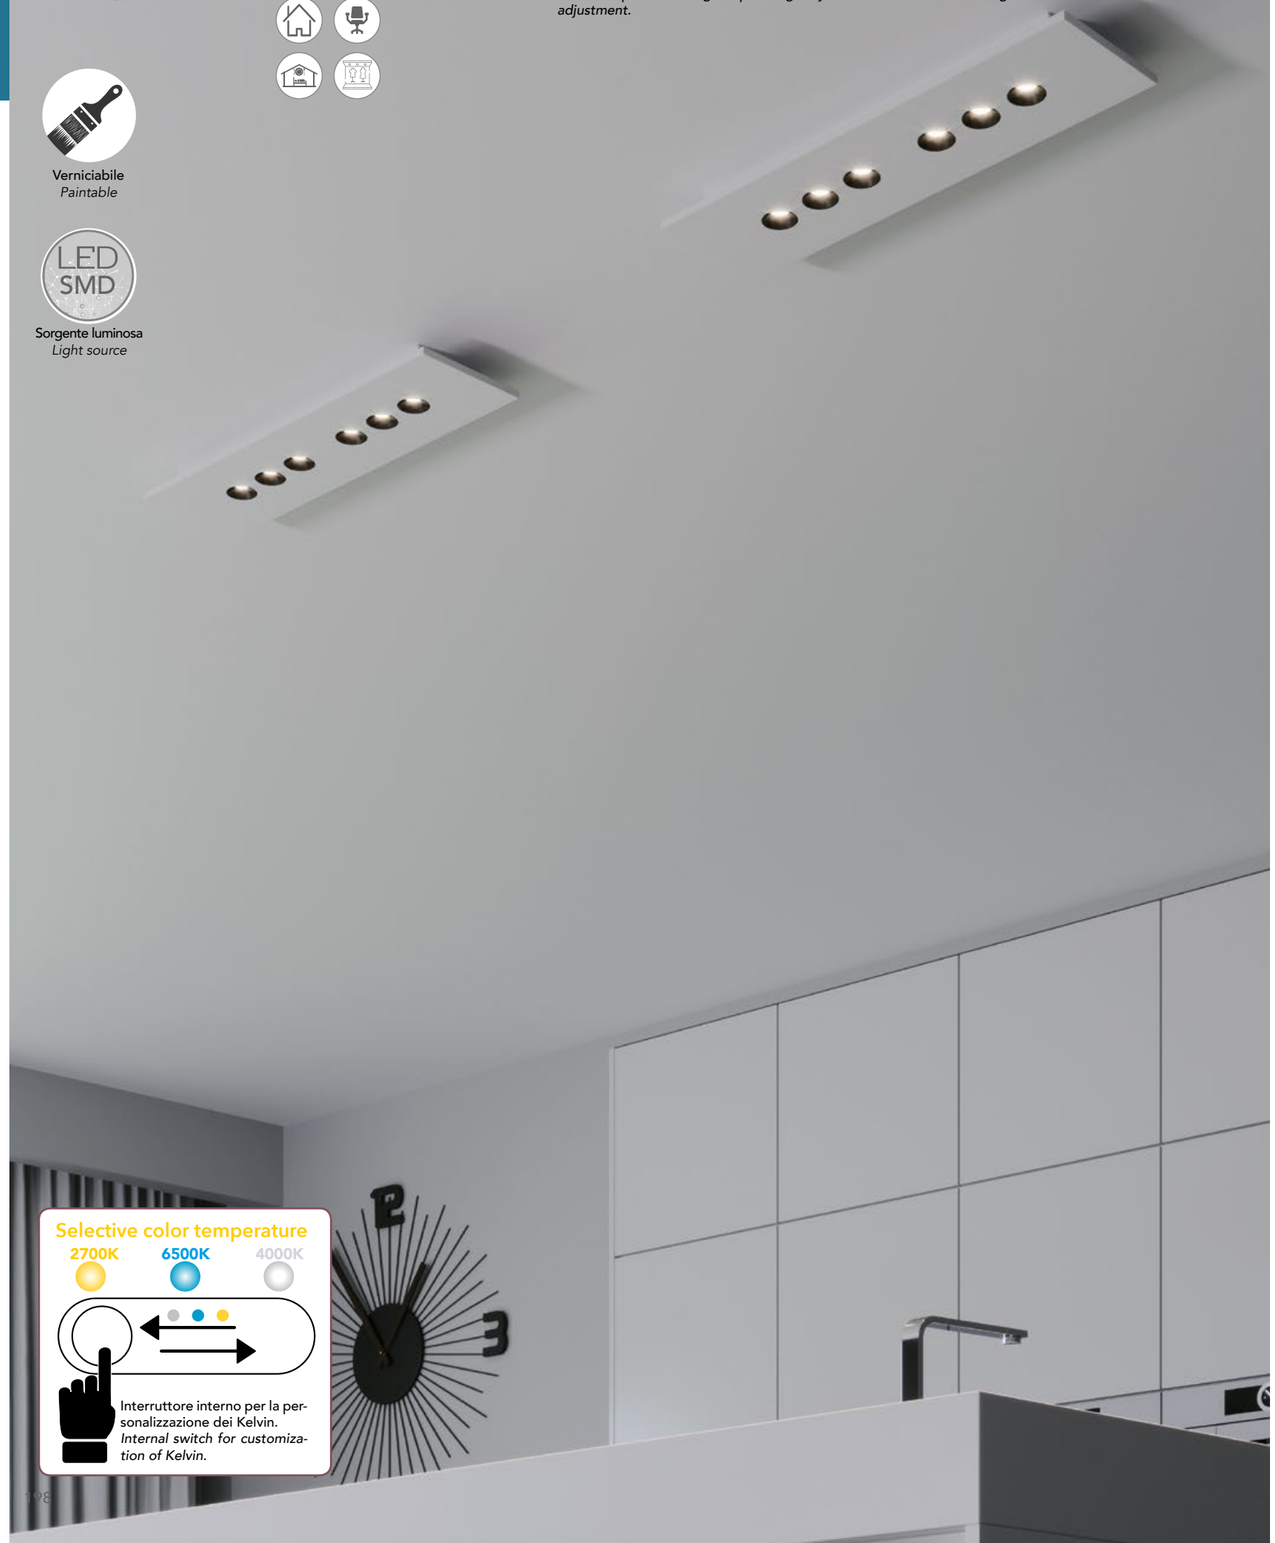

Driver
incluso

Sorgente luminosa
LED SMD 3x4W 6X3W 12X3W

Temperatura colore selezionabile
4000K - 6500K - 2700K

Flusso luminoso
766Lm - 922Lm - 954Lm
1264Lm - 1475Lm - 1542Lm
2383Lm - 2854Lm - 2998Lm

Angolo di luce
36°

CRI
>80

Driver
Included

Light source
LED SMD 3x4W 6X3W 12X3W

Selectable color temperature
4000K - 6500K - 2700K

Luminous flux
766Lm - 922Lm - 954Lm
1264Lm - 1475Lm - 1542Lm
2383Lm - 2854Lm - 2998Lm

Beam angle
36°

CRI
>80



LED-XICO-40X20 — 3X4W
8031414883677

Misure - size
dimensioni in mm - size mm





LED-XICO-70X20 — 6X3W
8031414883660

Misure - size
dimensioni in mm - size mm





LED-XICO-50X50 — 12X3W
8031414883653

Misure - size
dimensioni in mm - size mm



VORTEX

Plafoniera in gesso veriniciabile con interruttore per regolazione kelvin.

Paintable plaster ceiling lamp with switch for kelvin CCT adjustment.

Verniciabile
Paintable

Sorgente luminosa
Light source

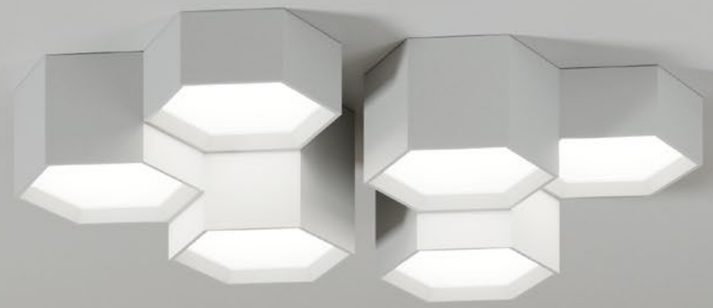



Interruttore interno per la personalizzazione dei Kelvin.
Internal switch for customization of Kelvin.

Driver
incluso

Sorgente luminosa
LED SMD 12W 36W

Temperatura colore selezionabile
4000K - 6500K - 2700K

Flusso luminoso
1355 Lm - 1543 Lm - 1467 Lm
4038 Lm - 4582Lm - 4337Lm

Angolo di luce
120°

CRI
>80

Driver
Included

Light source
LED SMD 12W 36W

Selectable color temperature
4000K - 6500K - 2700K

Luminous flux
1355 Lm - 1543 Lm - 1467 Lm
4038 Lm - 4582Lm - 4337Lm

Beam angle
120°

CRI
>80



LED-VORTEX-PL1 — 12W
8031414883691

Misure - size
dimensioni in mm - size mm





LED-VORTEX-PL3 — 36W — PF90
8031414883684

Misure - size
dimensioni in mm - size mm



SPACE

Plafoniera struttura in gesso verniciabile

Gypsun ceiling lamp paintable



Verniciabile
Paintable

GU10

Attacco sorgente
Lampholder



I-SPACE-S-Q1
8031439521264
1XGU10 MAX 9W

Lampadina non inclusa
Light bulb not included

Misure - size
dimensioni in mm - size mm





I-SPACE-S-R1
8031439531263
1XGU10 MAX 9W

Lampadina non inclusa
Light bulb not included

Misure - size
dimensioni in mm - size mm



SPACE

Plafoniera in gesso verniciabile ghiera orientabile

Gypsun ceiling lamp paintable with adjustable metal ring



Verniciabile
Paintable

GU10

Attacco sorgente
Source

15°

Orientabile
Adjustable



I-SPACE-Q1
8031434171211
1XGU10 MAX 35W

Lampadina non inclusa
Light bulb not included

Misure - size
dimensioni in mm - size mm





I-SPACE-R1
8031434141214
1XGU10 MAX 35W

Lampadina non inclusa
Light bulb not included

Misure - size
dimensioni in mm - size mm



BANJIE

Applique a parete in gesso verniciabile

Gypsun wall lamp paintable.

Verniciabile
Paintable

GU10

Attacco sorgente
Lampholder

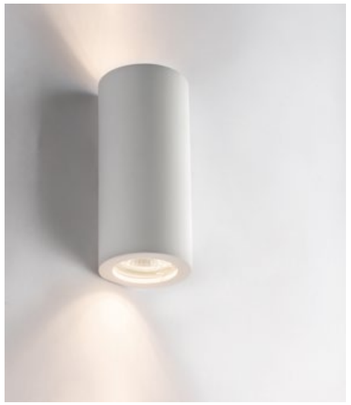

I-BANJIE-S-AP
8031440365475

2XGU10 MAX 9W

Lampadina non inclusa
Light bulb not included

Misure - size
dimensioni in mm - size mm





I-BANJIE-L-AP
8031440365499

2XGU10 MAX 9W

Lampadina non inclusa
Light bulb not included

Misure - size
dimensioni in mm - size mm





I-BANJIE-AP4
8031414866533

4XGU10 MAX 9W

Lampadina non inclusa
Light bulb not included

Misure - size
dimensioni in mm - size mm



BANJIE

Applique a parete in gesso verniciabile

Gypsun wall lamp paintable.

Verniciabile
Paintable

GU10

Attacco sorgente
Lampholder

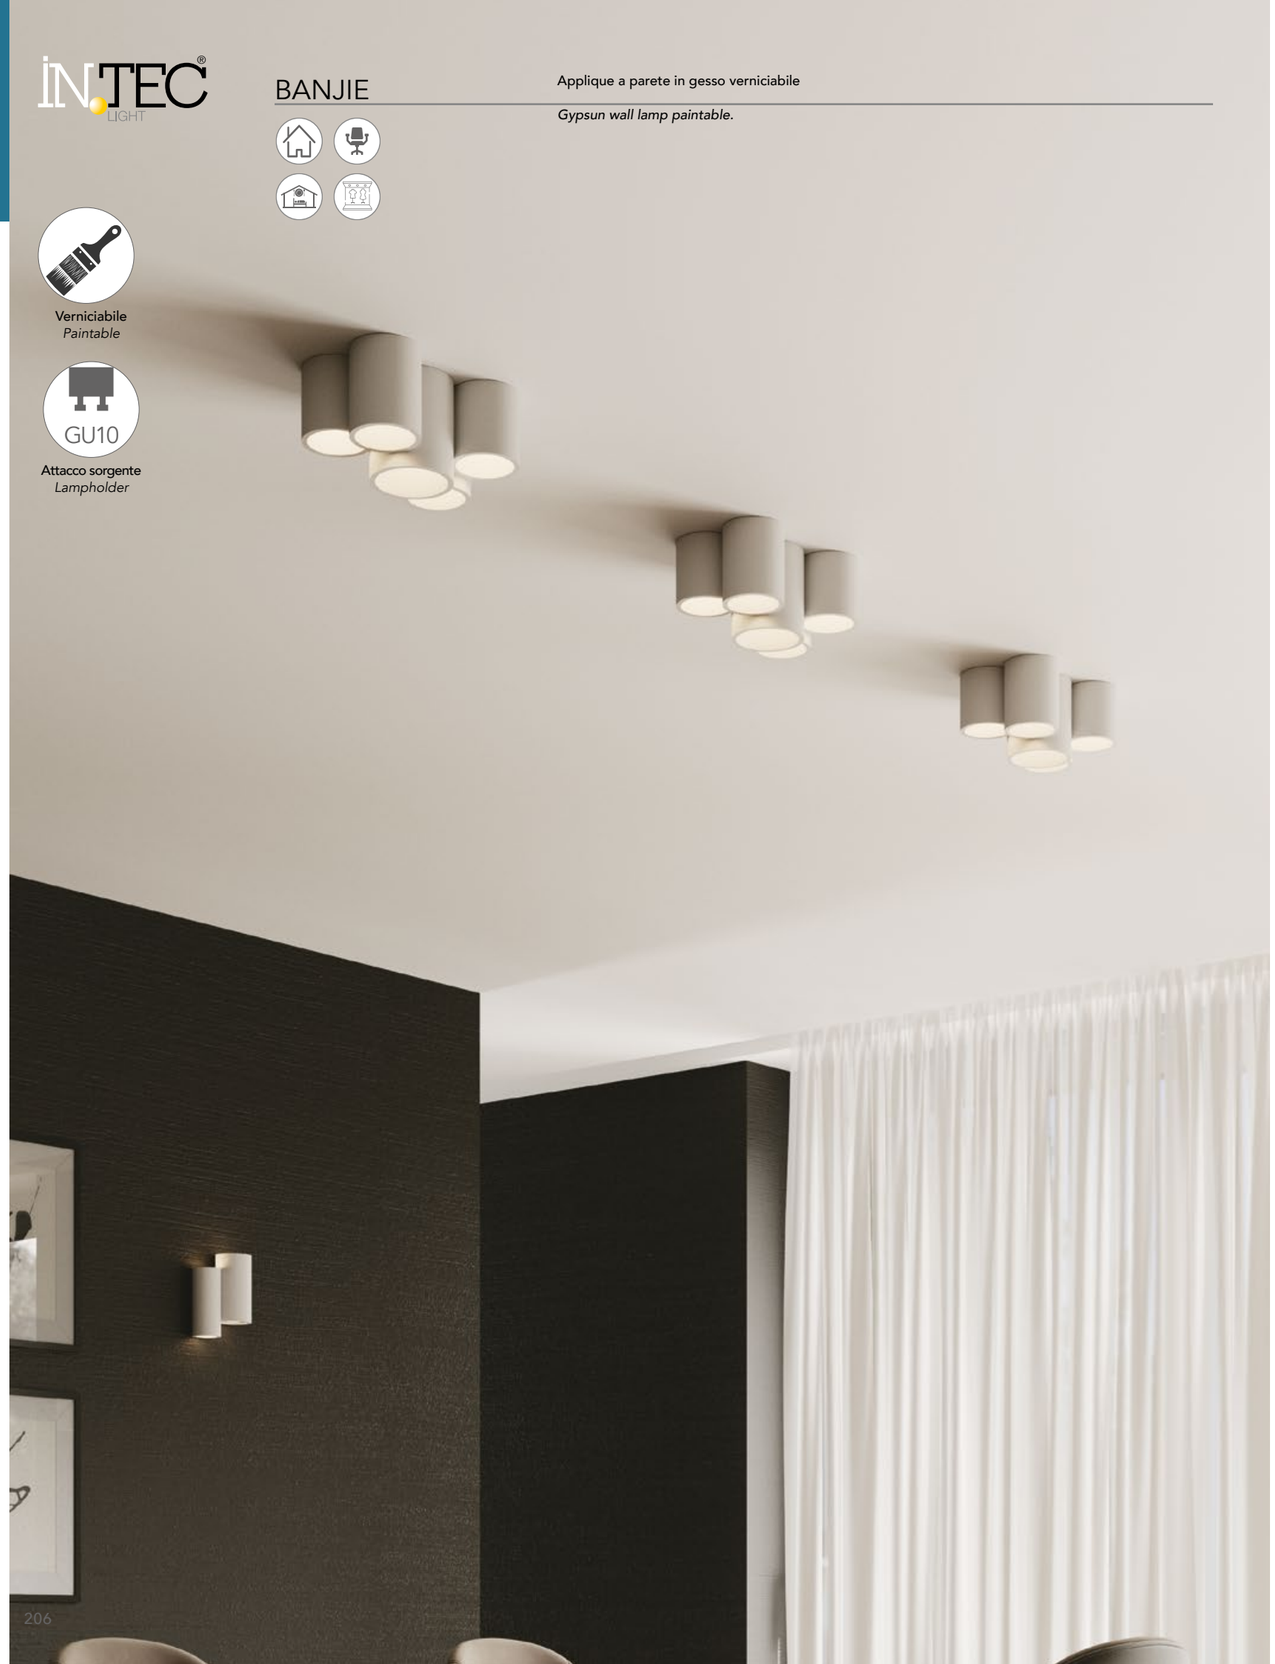



I-BANJIE-PL1
8031414867479
1XGU10 MAX 35W

Lampadina non inclusa
Light bulb not included

Misure - size
dimensioni in mm - size mm





I-BANJIE-PL3
8031414867486
3XGU10 MAX 9W

Lampadina non inclusa
Light bulb not included

Misure - size
dimensioni in mm - size mm





I-BANJIE-PL5
8031414867493
5XGU10 MAX 9W

Lampadina non inclusa
Light bulb not included

Misure - size
dimensioni in mm - size mm

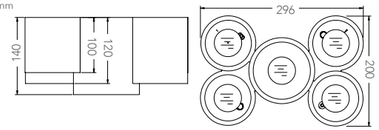

FOSTER

Applique a parete e plafoniere in gesso verniciabile

Gypsun wall and ceilig lamp paintable.

Verniciabile
Paintable

GU10

Attacco sorgente
Lampholder





I-FOSTER-AP
8031414861385 — **2XGU10 MAX 9W**

Lampadina non inclusa
Light bulb not included

Misure - size
dimensioni in mm - size mm





I-FOSTER-AP4
8031414867509 — **4XGU10 MAX 9W**

Lampadina non inclusa
Light bulb not included

Misure - size
dimensioni in mm - size mm





I-FOSTER-PL1
8031414867516 — **1XGU10 MAX 35W**

Lampadina non inclusa
Light bulb not included

Misure - size
dimensioni in mm - size mm





I-FOSTER-PL25
8031414876013 — **2XGU10 MAX 35W**

Lampadina non inclusa
Light bulb not included

Misure - size
dimensioni in mm - size mm





I-FOSTER-PL3
8031414867523 — **3XGU10 MAX 9W**

Lampadina non inclusa
Light bulb not included

Misure - size
dimensioni in mm - size mm





I-FOSTER-PL5
8031414867530 — **5XGU10 MAX 9W**

Lampadina non inclusa
Light bulb not included

Misure - size
dimensioni in mm - size mm



HAPIS

Plafoniere componibili in gesso verniciabile

Modulable gypsun ceiling lamp paintable



Verniciabile
Paintable

GU10
Attacco sorgente
Lampholder

Misura lampadina
Bulb size



I-HAPIS-RT4
8031414884285
4XGU10 MINI MAX 35W

Lampadina non inclusa
Light bulb not included

Misure - size
dimensioni in mm - size mm





I-HAPIS-Q4
8031414884308
4XGU10 MINI MAX 35W

Lampadina non inclusa
Light bulb not included

Misure - size
dimensioni in mm - size mm



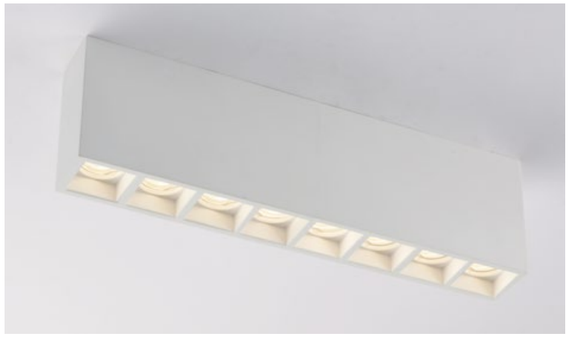

I-HAPIS-RT8
8031414884292
8XGU10 MINI MAX 35W

Lampadina non inclusa
Light bulb not included

Misure - size
dimensioni in mm - size mm



LIVING

Plafoniere componibili in gesso verniciabile con diffusore in acrilico

Modulable gypsun ceiling lamp paintable with acrylic diffuser

Verniciabile
Paintable

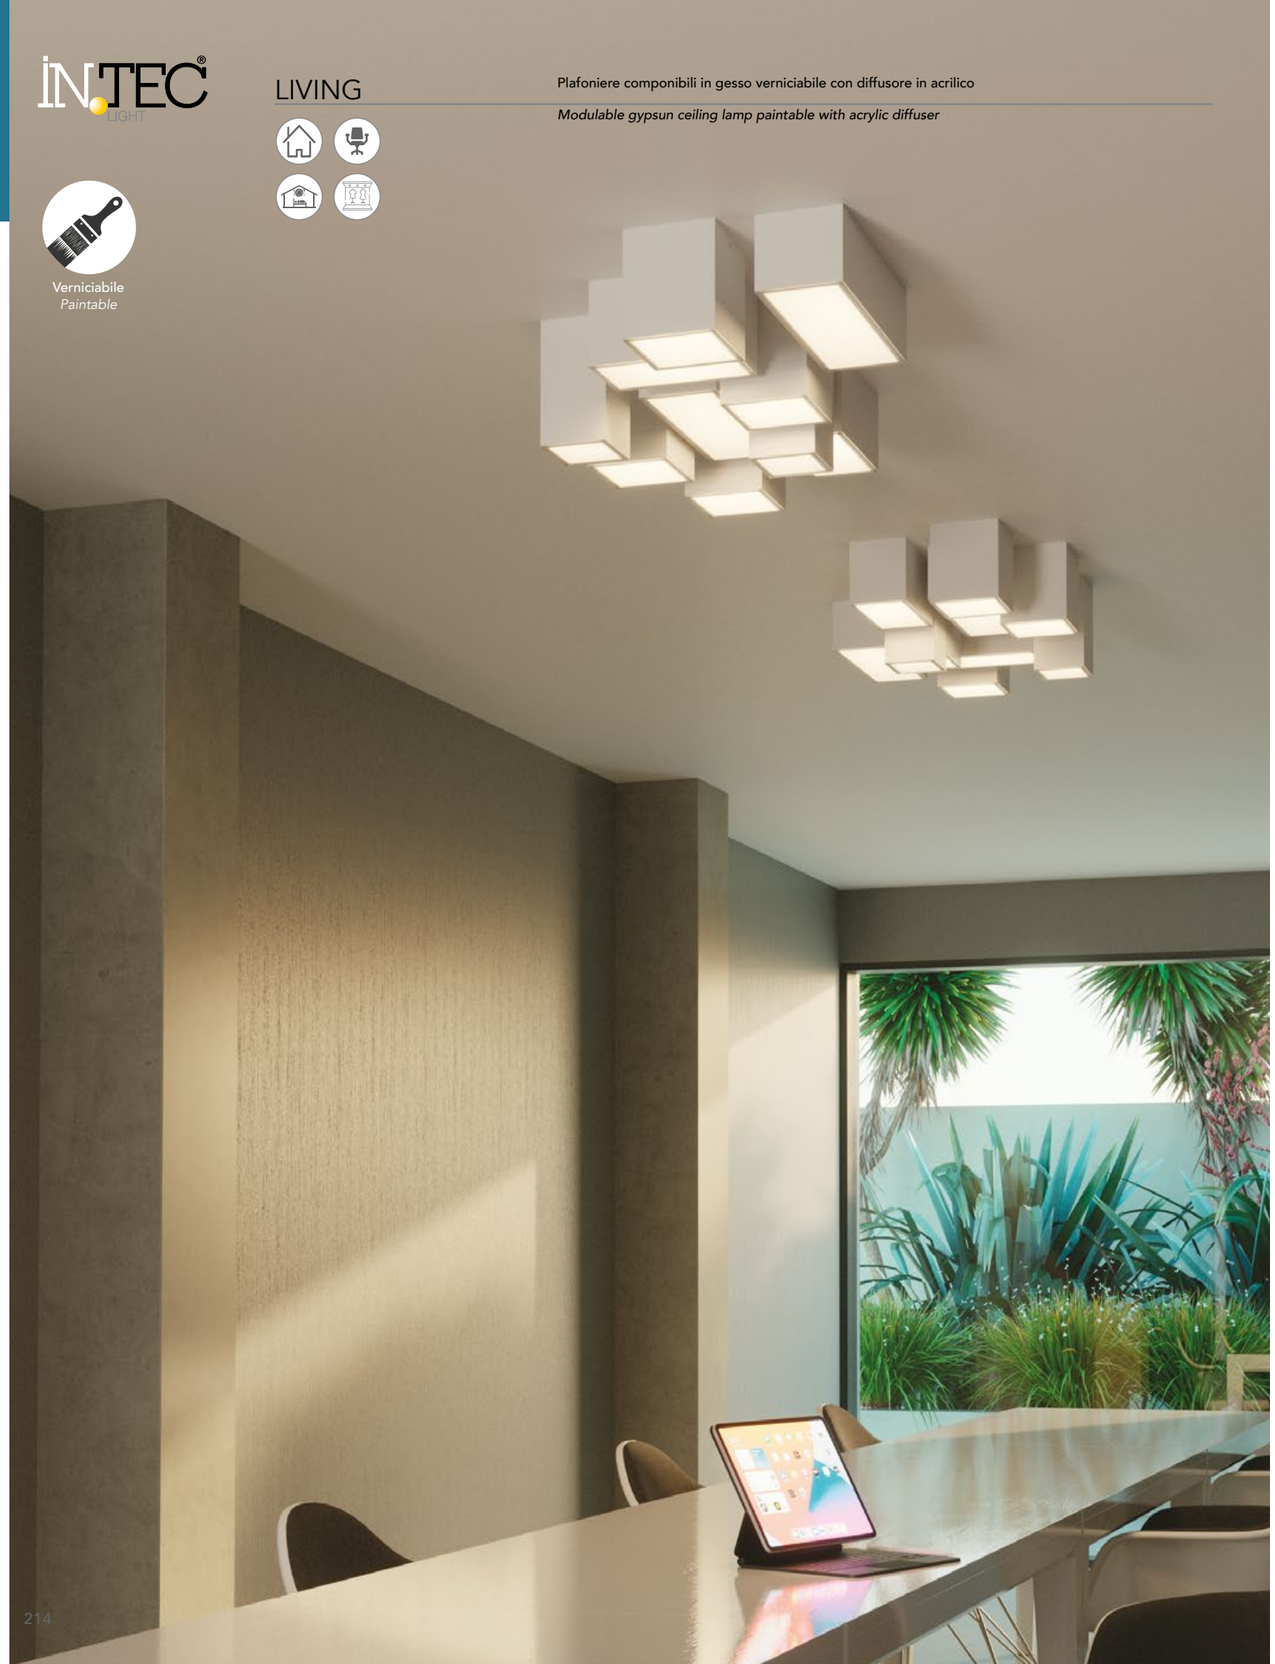



I-LIVING-PL14
8031414876020

1XE27 MAX 15W

Lampadina non inclusa
Light bulb not included

Misure - size
dimensioni in mm - size mm





I-LIVING-PL11
8031414876037

1XE14 MAX 13W

Lampadina non inclusa
Light bulb not included

Misure - size
dimensioni in mm - size mm





I-LIVING-PL23
8031414876044

2XE14 MAX 13W

Lampadina non inclusa
Light bulb not included

Misure - size
dimensioni in mm - size mm





I-LIVING-PL36
8031414876051

4XE14 MAX 13W

Lampadina non inclusa
Light bulb not included

Misure - size
dimensioni in mm - size mm



GABRIEL

Plafoniera in gesso verniciabile con diffusore in vetro

Gypsun ceiling lamp paintable with glass diffuser.

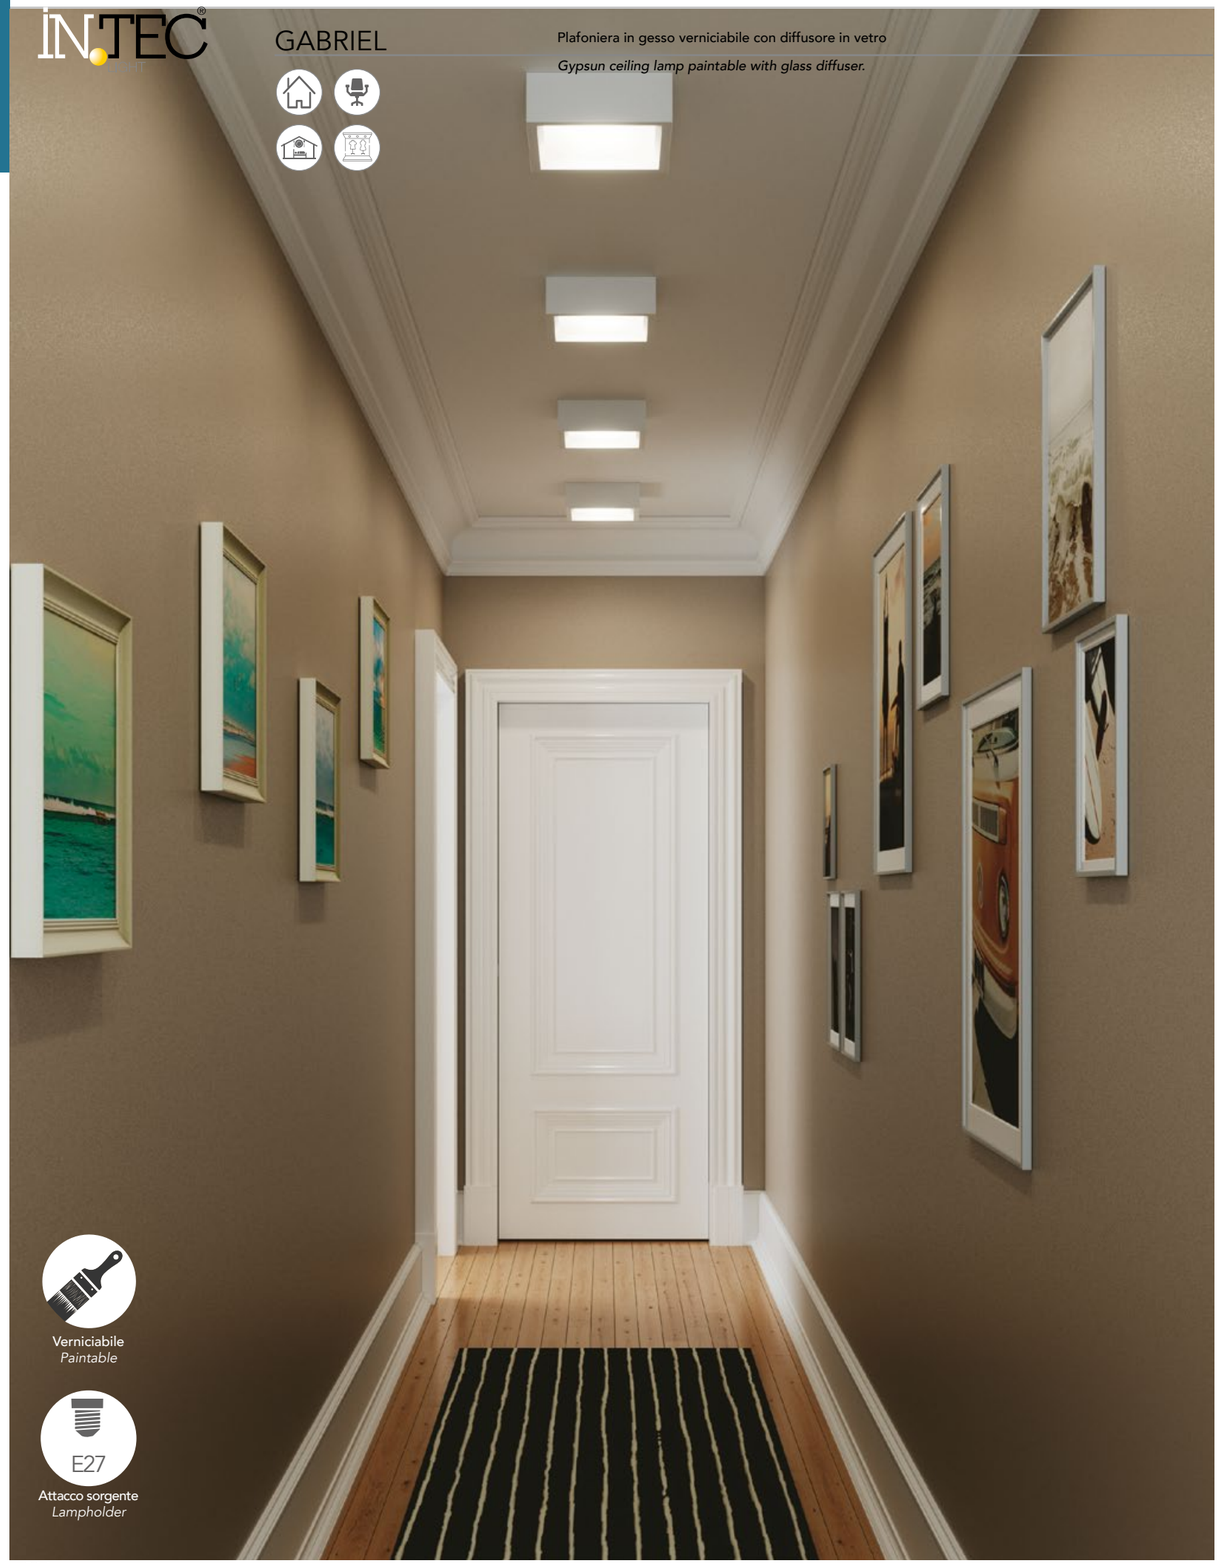

Verniciabile
Paintable

E27

Attacco sorgente
Lampholder



I-GABRIEL/PL25Q
8031434101218

2XE27 MAX 25W

Lampadina non inclusa
Light bulb not included

Misure - size
dimensioni in mm - size mm





I-GABRIEL/PL30R
8031434111217

2XE27 MAX 25W

Lampadina non inclusa
Light bulb not included

Misure - size
dimensioni in mm - size mm



ROCK

Plafoniera in gesso verniciabile o cemento naturale con led integrato

Gypsun paintable or natural concrete ceiling lamp with built-in LED.



LED SMD

Sorgente luminosa
Light source

ROCK

Driver
incluso

Sorgente luminosa
LED SMD 25W

Temperatura colore
4000K

Flusso luminoso
2000 Lm

Angolo di luce
120°

CRI
>80

Driver
Included

Light source
SMD LED 25W

Color temperature
4000K

Luminous flux
2000 Lm

Beam angle
120°

CRI
>80



LED-ROCK-Q **24W**
8031414867660

Gesso Verniciabile
Gypsun paintable

Misure - size
dimensioni in mm - size mm



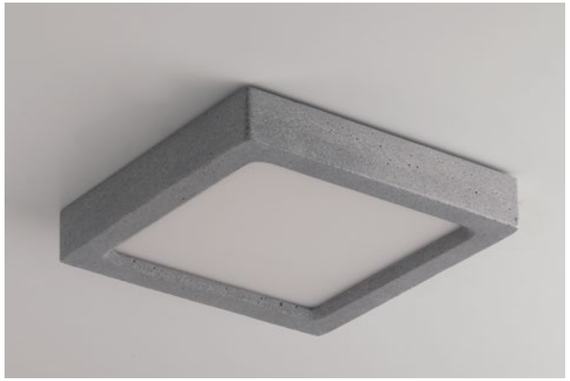

LED-ROCK-CM-Q **24W**
8031414867646

CEMENTO
CONCRETE

Misure - size
dimensioni in mm - size mm



ORTISEI

Applique in gesso verniciabile con led SMD integrato doppia emissione di luce

Gypsun wall lamp paintable with built-in led SMD double light emission

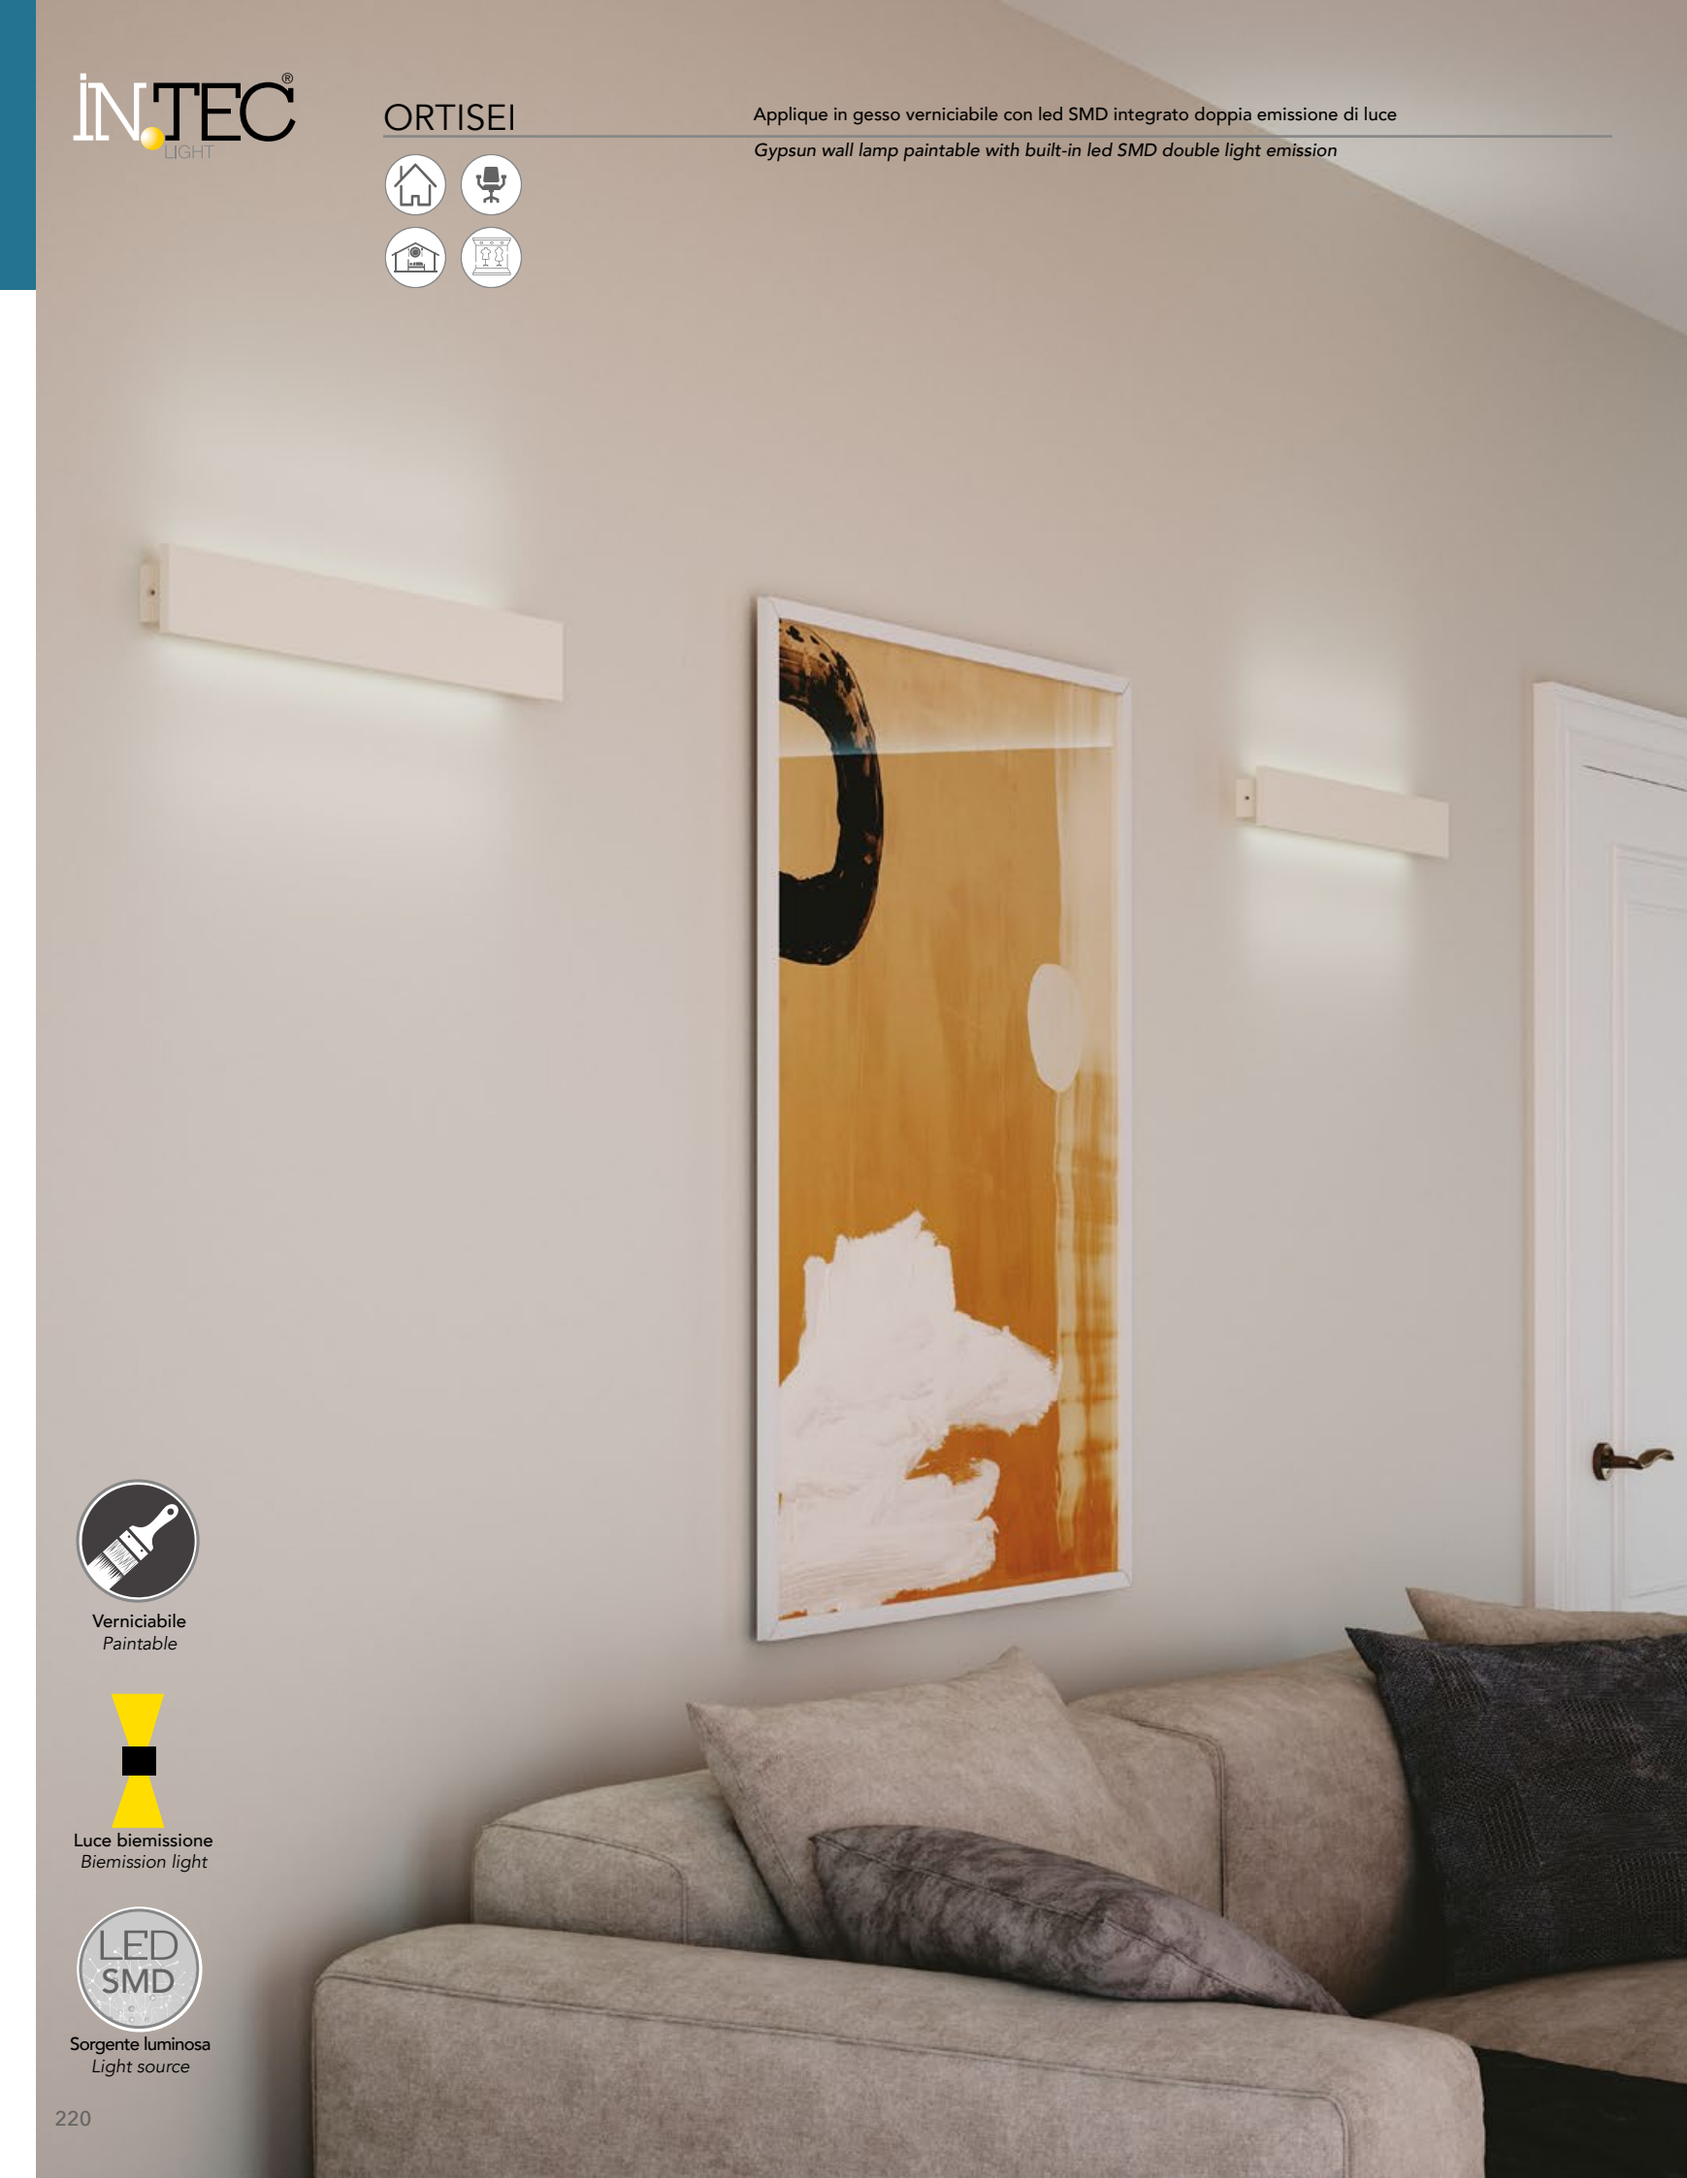

Verniciabile
Paintable

Luce biemissione
Biemission light

LED SMD

Sorgente luminosa
Light source

ORTISEI

Driver
incluso

Sorgente luminosa
LED SMD 8W - 11,8W - 19,9W

Temperatura colore
4000K

Flusso luminoso
516Lm, 956Lm, 1649Lm

Angolo di luce
↑120° + ↓120°

CRI
>80

Driver
included

Light source
LED SMD 8W - 11,8W - 19,9W

Colour temperature
4000K

Luminous flux
516Lm, 956Lm, 1649Lm

Beam angle
↑120° + ↓120°

CRI
>80



LED-ORTISEI-AP22 — **8W - 516 Lm**
8031414866571

Misure - size
dimensioni in mm - size mm

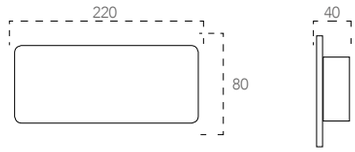



LED-ORTISEI-AP40 — **11,8W - 956 Lm**
8031414866588

Misure - size
dimensioni in mm - size mm

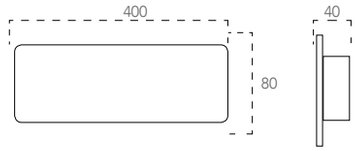



LED-ORTISEI-AP60 — **19,9W - 1649 Lm**
8031414866557

Misure - size
dimensioni in mm - size mm

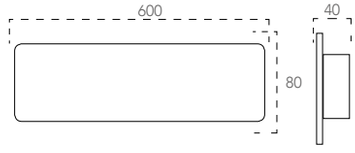

MOOD

Applique a parete in gesso verniciabile.

Gypsun wall lamp paintable.

Verniciabile
Paintable

Luce biemissione
Biemission light

G9
Attacco sorgente
Lampholder

G9
Lampadina non inclusa
bulbs not included



I-MOOD-AP
8031414882946
2XG9 MAX 25W

Misure - Size
dimensioni in mm - size mm



SOUL

Applique a parete in gesso verniciabile.

Gypsun wall lamp paintable.

Verniciabile
Paintable

E14
Attacco sorgente
Lampholder

E14
Lampadina non inclusa
bulbs not included



I-SOUL-AP
8031414882953
1XE14 MAX 20W

Misure - Size
dimensioni in mm - size mm



LEIRON

Applique a parete in gesso verniciabile.

Gypsun wall lamp paintable.

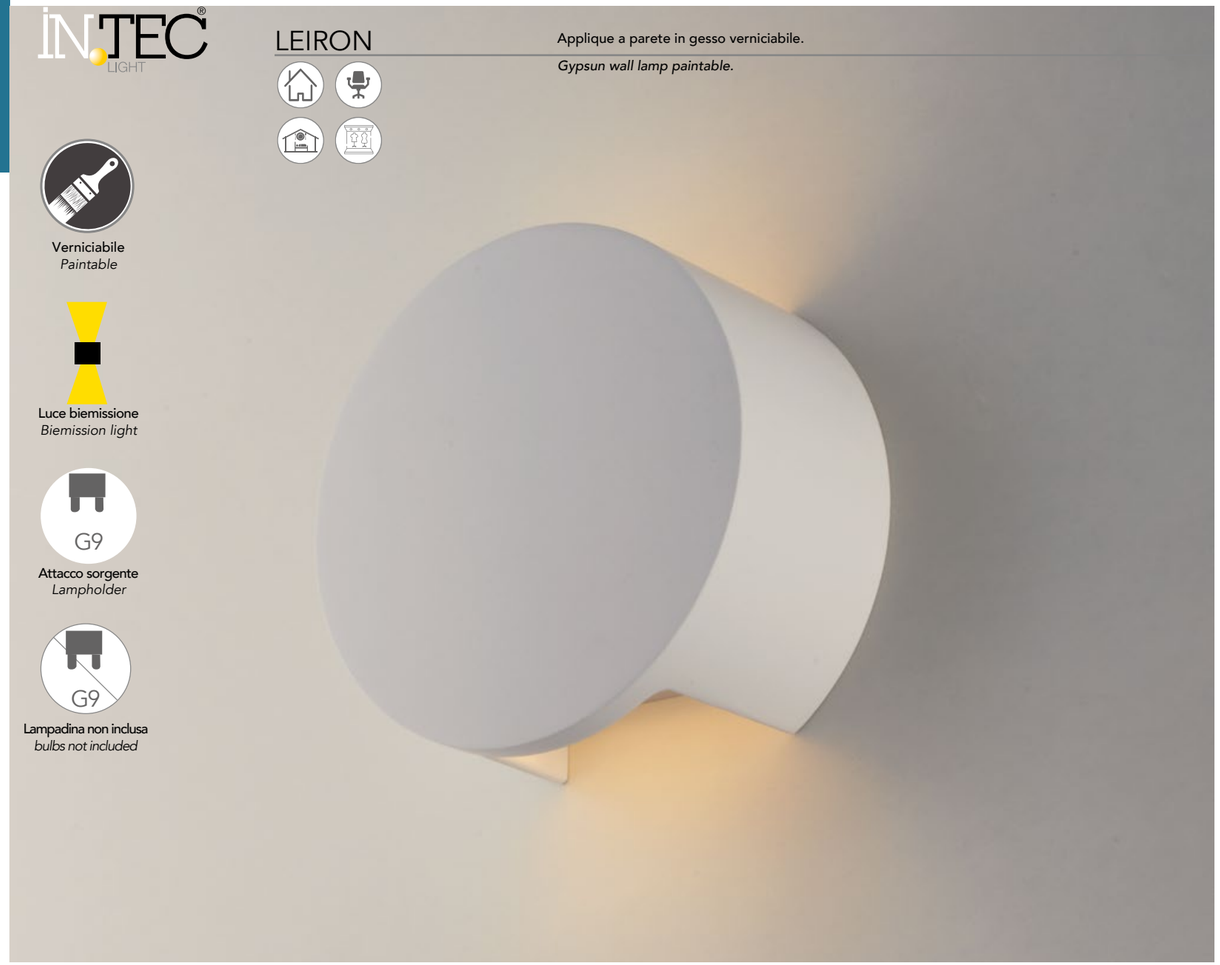

Verniciabile
Paintable

Luce biemissione
Biemission light

G9
Attacco sorgente
Lampholder

G9
Lampadina non inclusa
bulbs not included



I-LEIRON-AP
8031436741238
1XG9 MAX 25W

Misure - Size
dimensioni in mm - size mm



MONTBLANC

Applique a parete in gesso verniciabile.

Gypsun wall lamp paintable.



Verniciabile
Paintable

G9
Attacco sorgente
Lampholder

G9
Lampadina non inclusa
bulbs not included



I-MONTBLANC-AP
8031414861354
1XG9 MAX 25W

Misure - Size
dimensioni in mm - size mm



SHINE

Applique a parete in gesso verniciabile.

Gypsun wall lamp paintable.

Verniciabile
Paintable

Luce biemissione
Biemission light

G9
Attacco sorgente
Lampholder

G9
Lampadina non inclusa
bulbs not included





I-SHINE-AP 8031434191219	1XG9 MAX 25W

Misure - Size
dimensioni in mm - size mm



ASTRON

Applique a parete in gesso verniciabile.

Gypsun wall lamp paintable.

Verniciabile
Paintable

Luce biemissione
Biemission light

G9
Attacco sorgente
Lampholder

G9
Lampadina non inclusa
bulbs not included

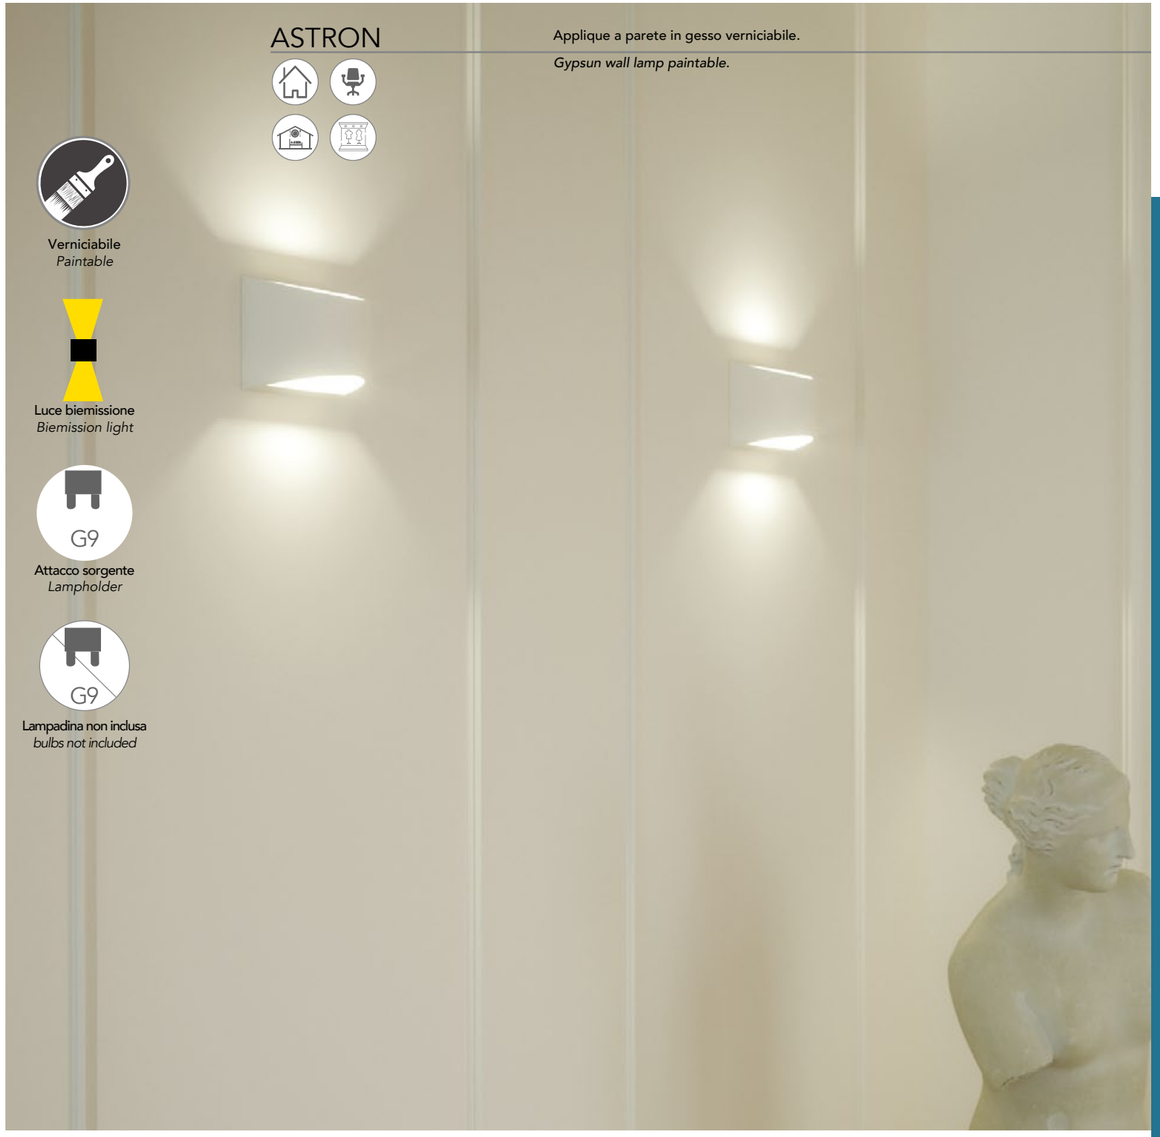



I-ASTRON-AP 8031414862412	1XG9 MAX 25W

Misure - Size
dimensioni in mm - size mm



CERVINIA

Applique a parete in gesso verniciabile con diffusore in acrilico.

Gypsun wall lamp paintable with acrylic diffuser



Verniciabile
Paintable

Luce biemissione
Biemission light

E27
Attacco sorgente
Lampholder

E27
Lampadina non inclusa
bulbs not included



I-CERVINIA-AP
8031414873555
1XE27 MAX 12W

Misure - Size
dimensioni in mm - size mm



SCOTT

Applique a parete in gesso verniciabile.

Gypsun wall lamp paintable.



Verniciabile
Paintable

Luce biemissione
Biemission light

E14
Attacco sorgente
Lampholder

E14
Lampadina non inclusa
bulbs not included



I-SCOTT-AP
8031414876082
2XE14 MAX 20W

Misure - Size
dimensioni in mm - size mm



RUBIK

Applique a parete in gesso verniciabile o in cemento naturale.

Gypsun paintable or concrete wall lamp.

Luce biemissione
Biemission light

Attacco sorgente
Lampholder

G9

Lampadina non inclusa
bulbs not included



RUBIK



I-RUBIK-AP2 — 2XG9 MAX 25W
8031414876075

Gesso Verniciabile
Gypsun paintable

Misure - Size
dimensioni in mm - size mm





I-RUBIK-AP — 1XG9 MAX 25W
8031440362146

Gesso Verniciabile
Gypsun paintable

Misure - Size
dimensioni in mm - size mm





I-RUBIK-CM-AP — 1XG9 MAX 25W
8031414867608

CEMENTO
CONCRETE

Misure - Size
dimensioni in mm - size mm



MOSES

Applique a parete in gesso verniciabile o cemento naturale.

Gypsun paintable or concrete wall lamp.

Luce biemissione
Biemission light

G9
Attacco sorgente
Lampholder

G9
Lampadina non inclusa
bulbs not included

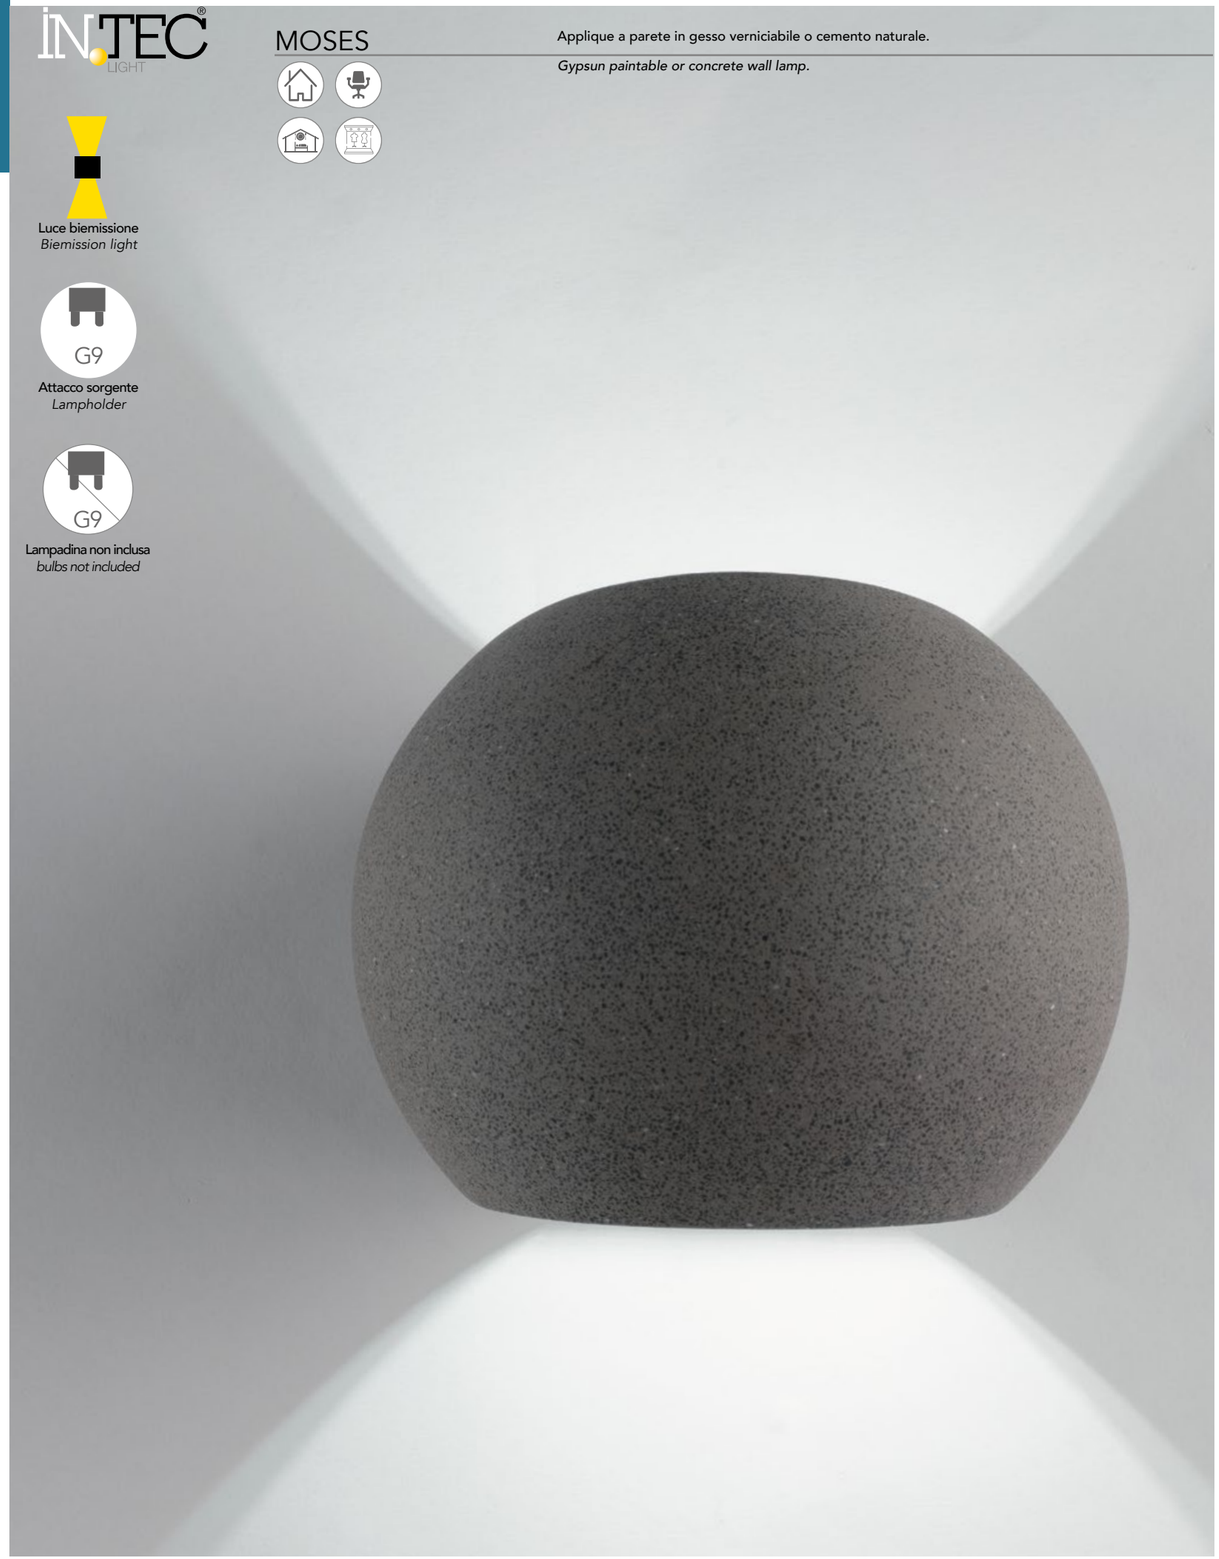



I-MOSES-AP
8031434181210
1XG9 MAX 25W

Gesso Verniciabile
Gypsun paintable

Misure - Size
dimensioni in mm - size mm





I-MOSES-CM-AP
8031414867615
1XG9 MAX 25W

CEMENTO
CONCRETE

Misure - Size
dimensioni in mm - size mm



PIROETTE

Applique a parete in gesso verniciabile.
Gypsun wall lamp paintable.

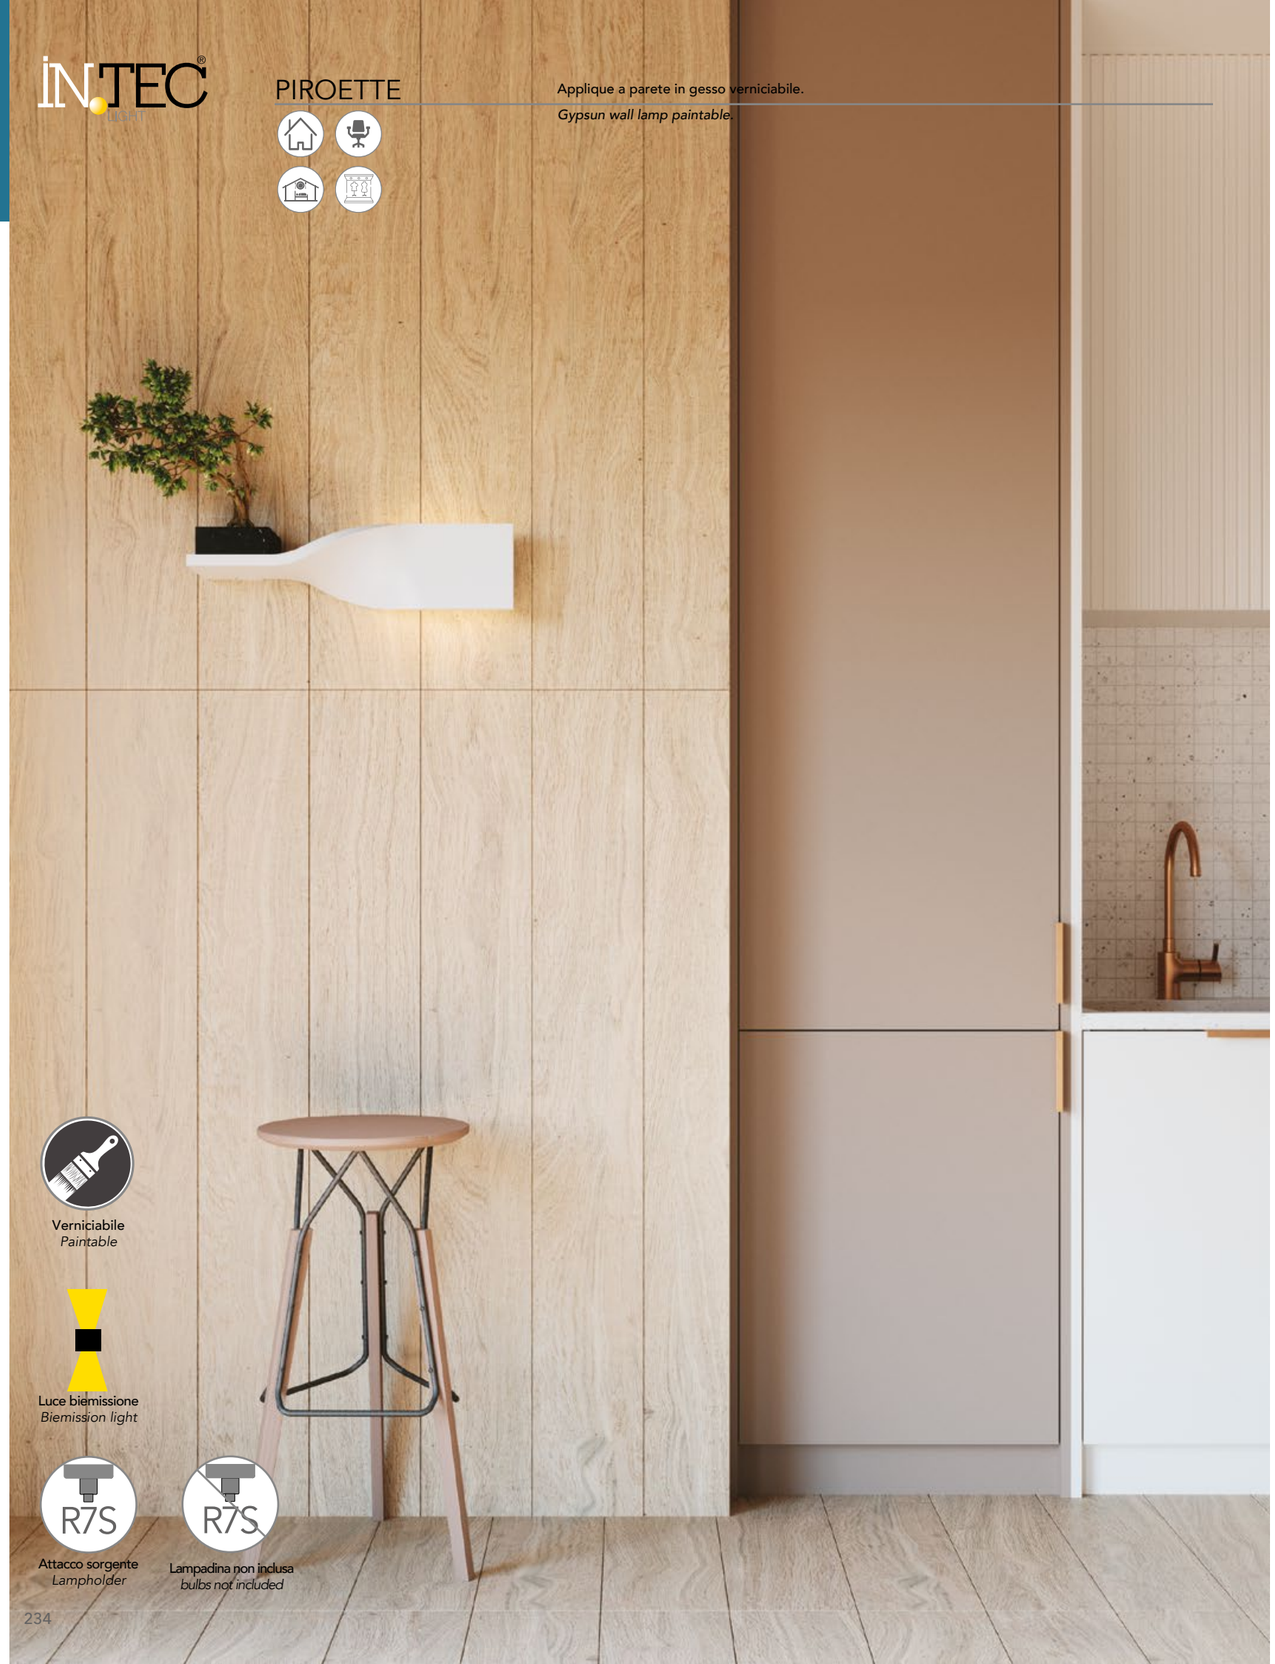

Verniciabile
Paintable

Luce biemissione
Biemission light

Attacco sorgente
Lampholder

Lampadina non inclusa
bulbs not included

PIROETTE





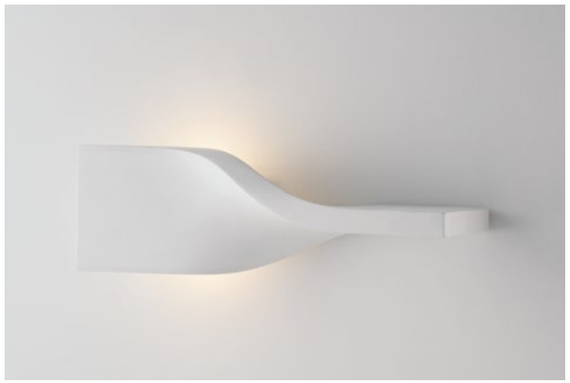

I-PIROETTE-AP36
8031414873562
1XR7S MAX 7W



Misure - Size
dimensioni in mm - size mm



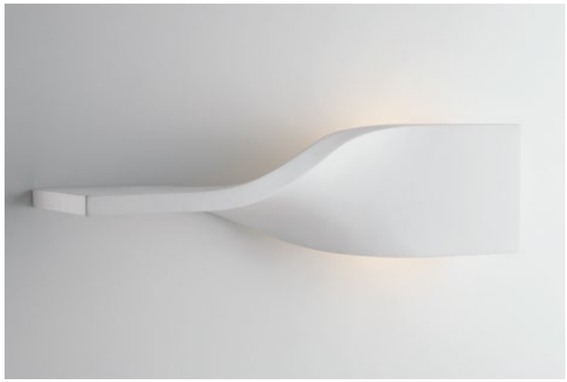

I-PIROETTE-AP56
8031414873579
1XR7S MAX 20W



Misure - Size
dimensioni in mm - size mm



CORTINA

Applique a parete in gesso verniciabile , diffusore inferiore in vetro satinato e diffusore superiore in acrilico bianco

Gypsun wall lamp paintable, lower diffuser in satin glass and upper diffuser white acrylic.

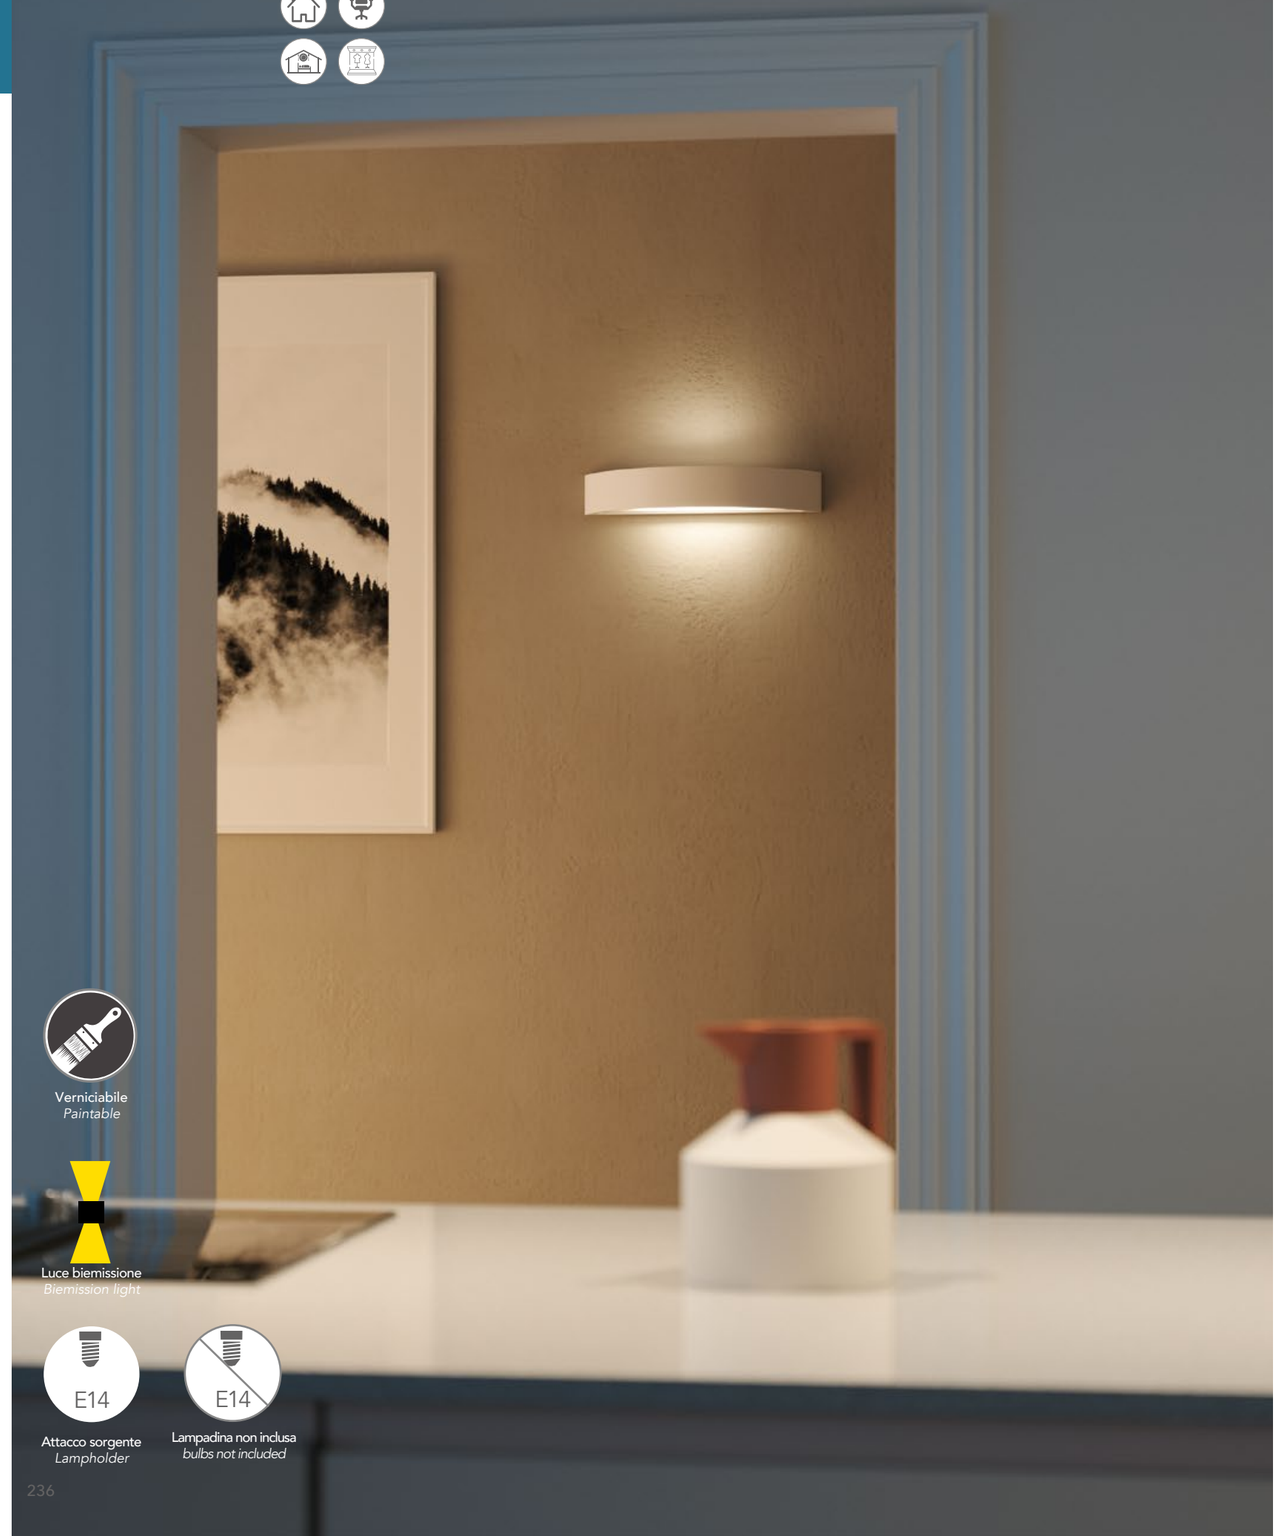

Verniciabile
Paintable

Luce biemissione
Biemission light

E14

Attacco sorgente
Lampholder

E14

Lampadina non inclusa
bulbs not included



I-CORTINA-S-AP **1XE14 MAX 13W**
8031414866472

Misure - Size
dimensioni in mm - size mm





I-CORTINA-AP **2XE14 MAX 13W**
8031414861347

Misure - Size
dimensioni in mm - size mm



CANDIDA

Applique a parete in gesso verniciabile o cemento , diffusore inferiore in vetro satinato e diffusore superiore in acrilico bianco

Gypsun wall lamp paintable or concrete, lower diffuser in satin glass and upper diffuser white acrylic.



Luce biemissione
Biemission light

E14

Attacco sorgente
Lampholder

E14

Lampadina non inclusa
bulbs not included



Gesso Verniciabile
Gypsun paintable

I-CANDIDA-S-AP
8031414866502
1XE14 MAX 13W

Misure - Size
dimensioni in mm - size mm





Gesso Verniciabile
Gypsun paintable

I-CANDIDA-AP
8031436751237
2XE14 MAX 13W

Misure - Size
dimensioni in mm - size mm





Gesso Verniciabile
Gypsun paintable

I-CANDIDA-L-AP
8031414865567
2XE14 MAX 13W

Misure - Size
dimensioni in mm - size mm





CEMENTO
CONCRETE

I-CANDIDA-CM-AP
8031414867592
2XE14 MAX 25W

Misure - Size
dimensioni in mm - size mm



GATSBY

Applique a parete in gesso verniciabile , diffusore inferiore in vetro satinato e diffusore superiore in acrilico bianco

Gypsun wall lamp paintable, lower diffuser in satin glass and upper diffuser white acrylic.

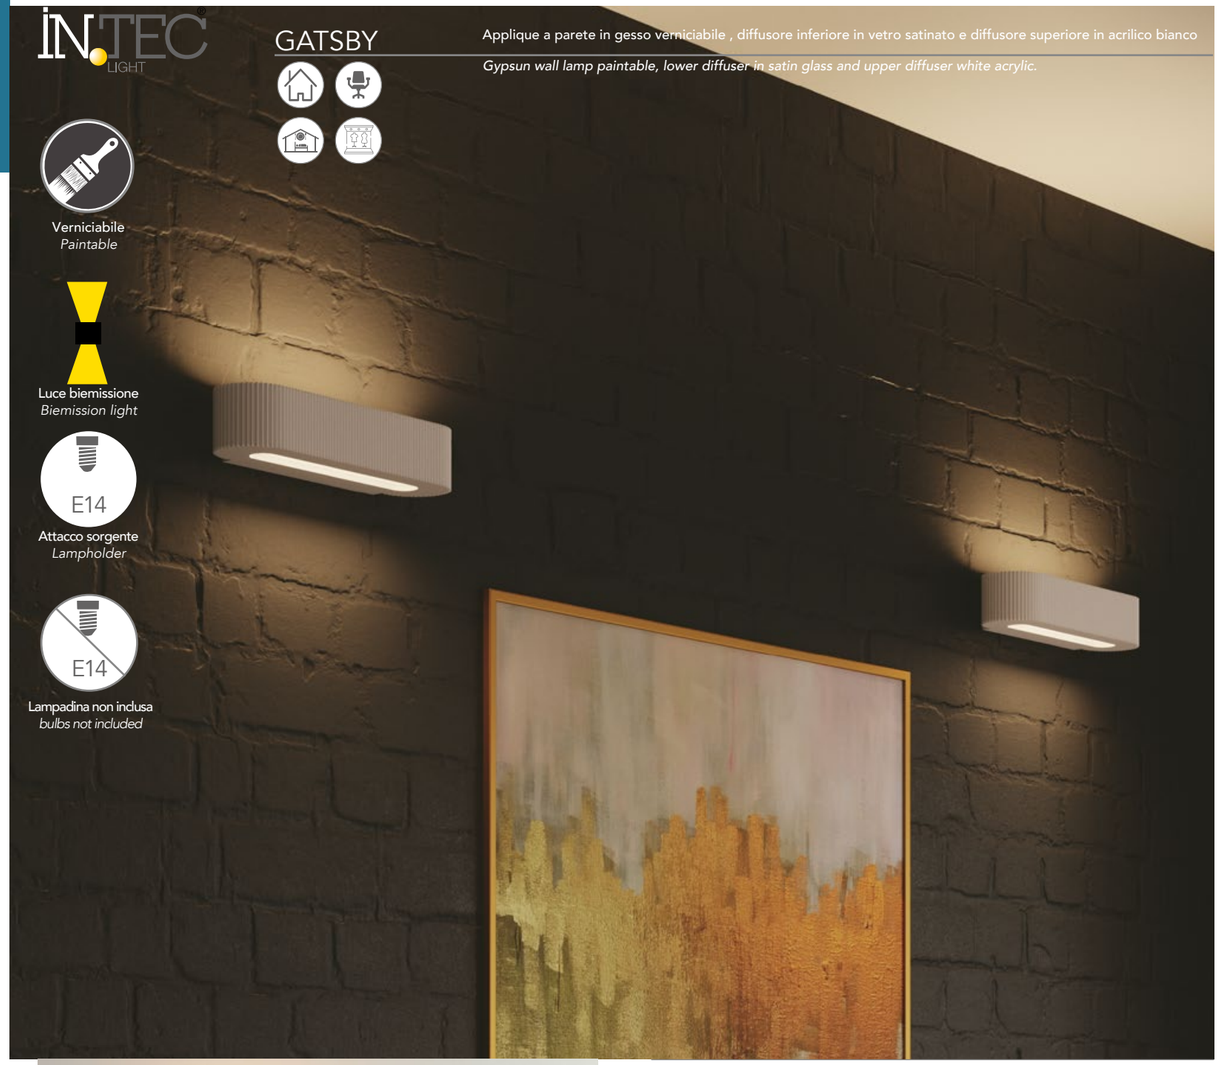



I-GATSBY-AP **2XE14 MAX 20W**
8031414876068

Misure - Size
dimensioni in mm - size mm



STONE

Applique a parete in gesso effetto sassi

Gypsun wall lamp stone finish

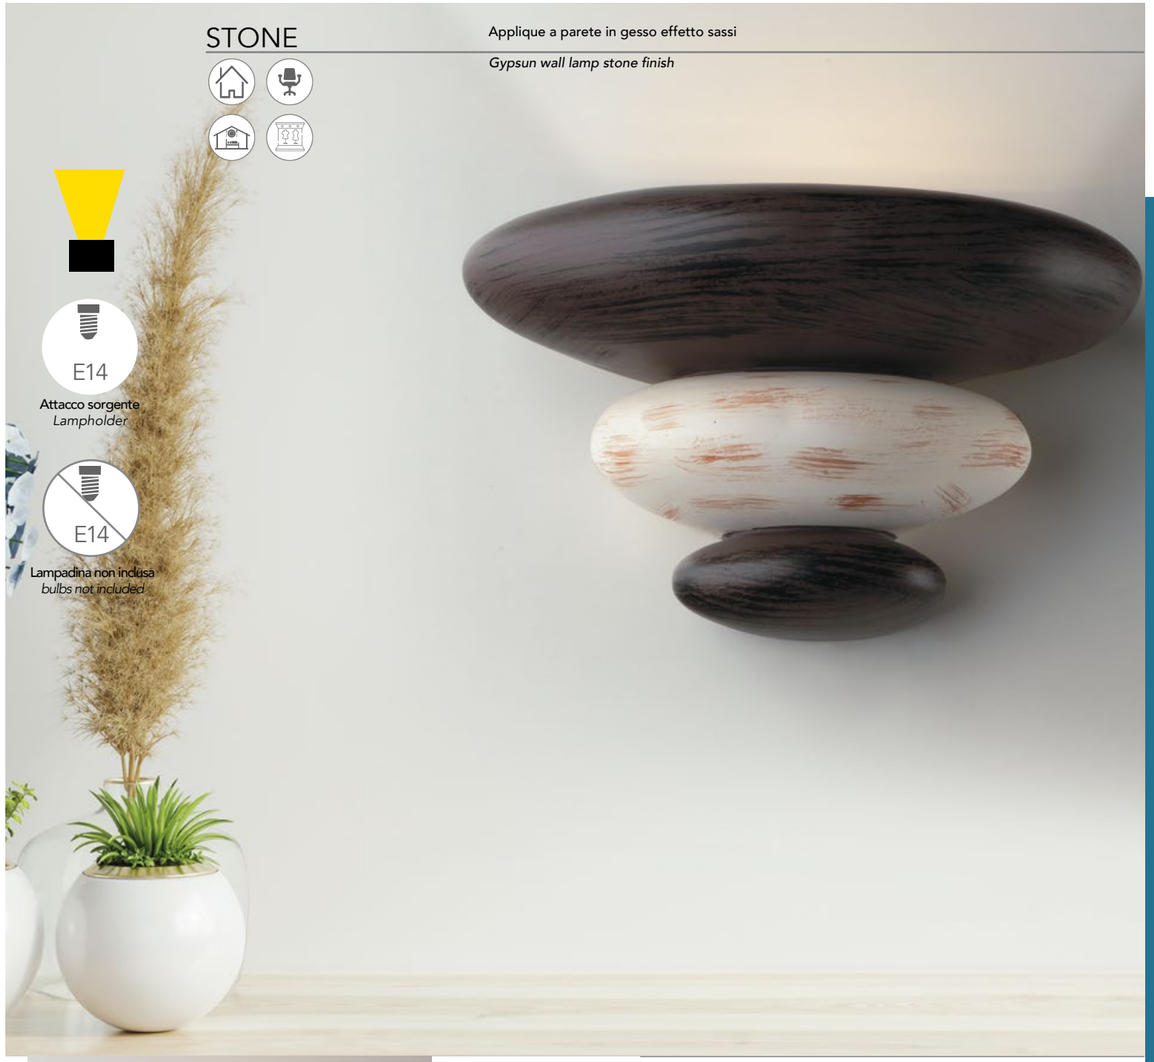



I-STONE-AP **1XE14 MAX 13W**
8031414865291

Misure - Size
dimensioni in mm - size mm



SANTORINI

Applique in gesso a parete angolare verniciabile con diffusione luminosa verso l'alto

Angular gypsun wall lamp paintable with upward light diffusion



Verniciabile
Paintable

E14

Attacco sorgente
Lampholder

E14

Lampadina non inclusa
bulbs not included



I-SANTORINI-AP
8031440351553

1XE14 MAX 13W

Misure - Size
dimensioni in mm - size mm



MYKONOS

Applique in gesso a parete angolare verniciabile con doppia emissione di luce con diffusore vetro satinato

Angular gypsun wall lamp paintable with biemission light diffusion with satin glass diffuser

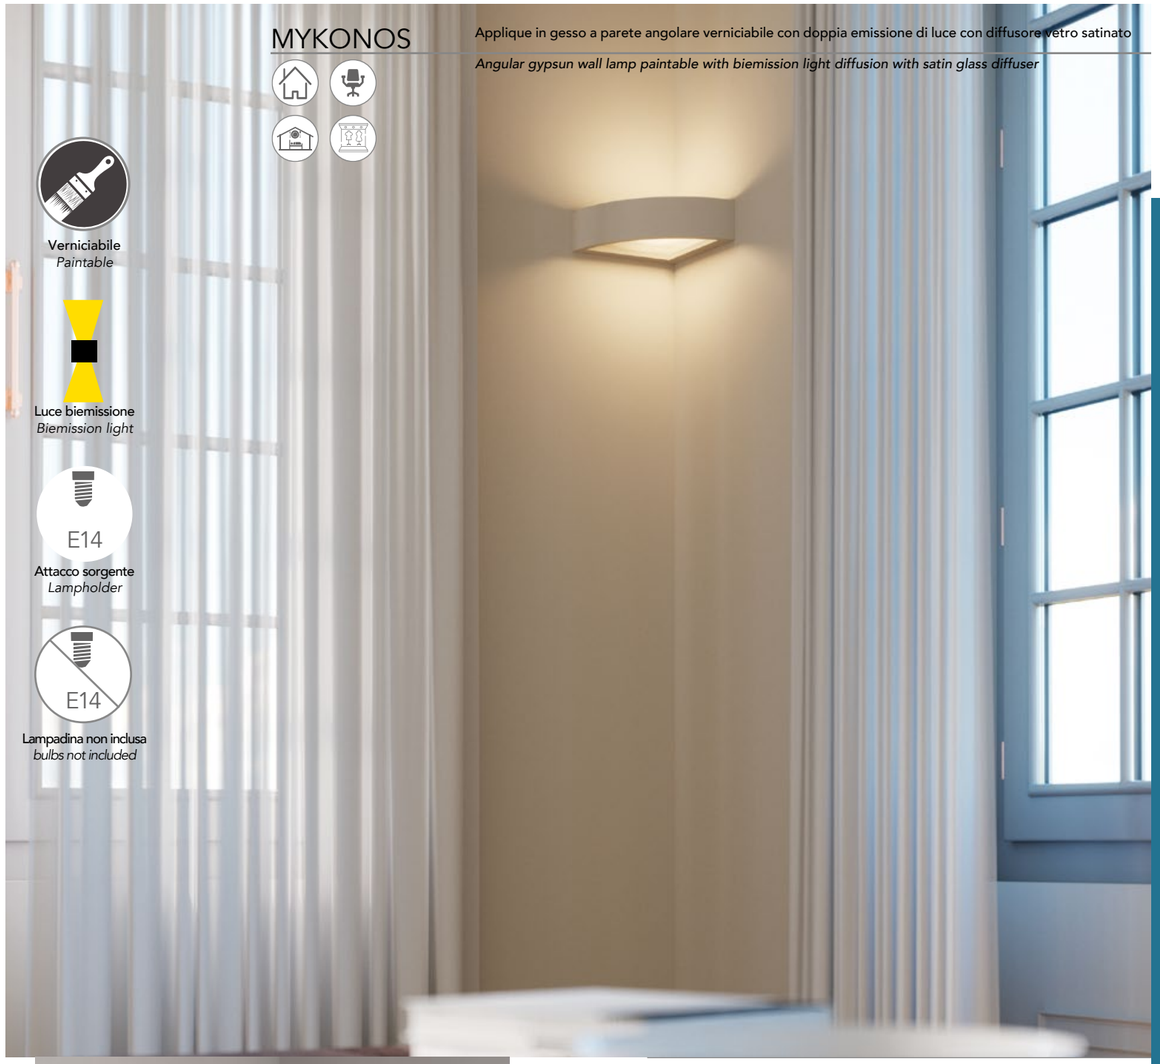

Verniciabile
Paintable

Luce biemissione
Biemission light

E14

Attacco sorgente
Lampholder

E14

Lampadina non inclusa
bulbs not included



I-MYKONOS-AP
8031440351584

1XE14 MAX 13W

Misure - Size
dimensioni in mm - size mm



ABEL

Applique a parete in gesso verniciabile con diffusione luminosa verso l'alto.

Gypsun wall lamp paintable with light diffusion upward

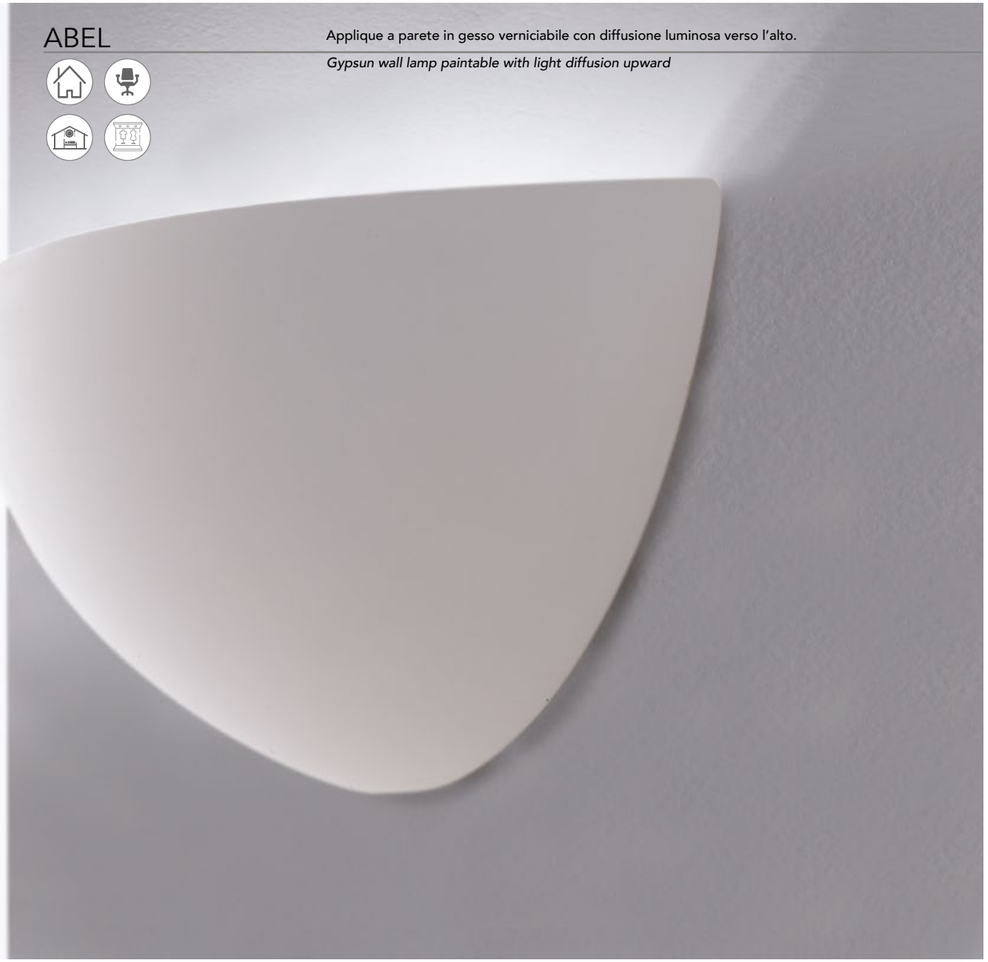

Verniciabile
Paintable

Attacco sorgente
Lampholder
E14

Lampadina non inclusa
bulbs not included
E14



I-ABEL-AP
8031440362153
2XE14 MAX 25W

Misure - Size
dimensioni in mm - size mm



SESTRIERE

Applique a parete in gesso verniciabile con doppia emissione di luce

Gypsun wall lamp paintable with biemission light diffusion

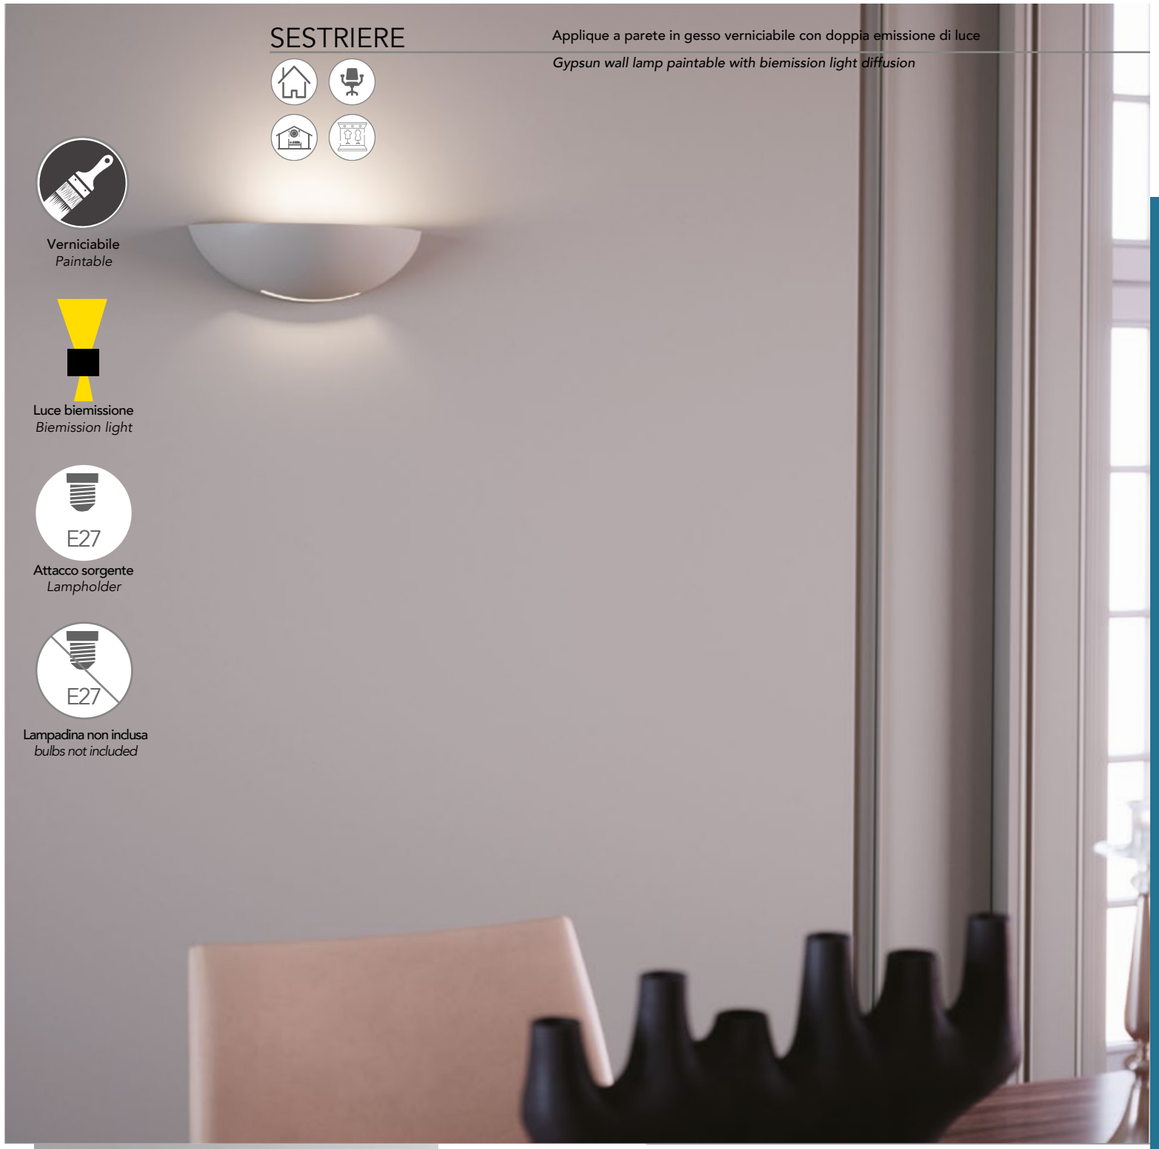

Verniciabile
Paintable

Luce biemissione
Biemission light

Attacco sorgente
Lampholder
E27

Lampadina non inclusa
bulbs not included
E27

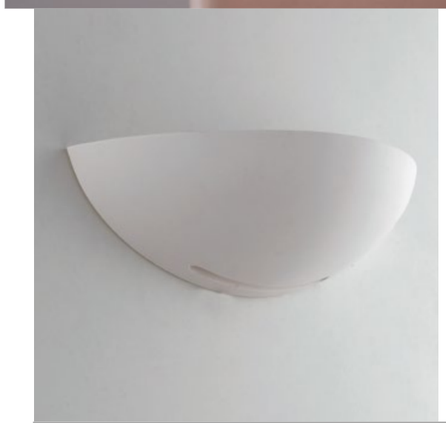

I-SESTRIERE-AP
8031414861330
1XE27 MAX 40W

Misure - Size
dimensioni in mm - size mm



MORITZ

Applique a parete in gesso verniciabile.

Gypsun wall lamp paintable.



Verniciabile
Paintable

E27
Attacco sorgente
Lampholder

E27
Lampadina non inclusa
bulbs not included



I-MORITZ-L-AP **1XE27 MAX 40W**
8031414861361

Misure - Size
dimensioni in mm - size mm





I-MORITZ-S-AP **1XE27 MAX 40W**
8031414861378

Misure - Size
dimensioni in mm - size mm



MORITZ

Applique a parete in gesso con finitura foglia oro, foglia argento, effetto legno noce o rovere sbiancato.

Gypsun wall lamp with finish gold leaf, silver leaf, walnut or oak effect.

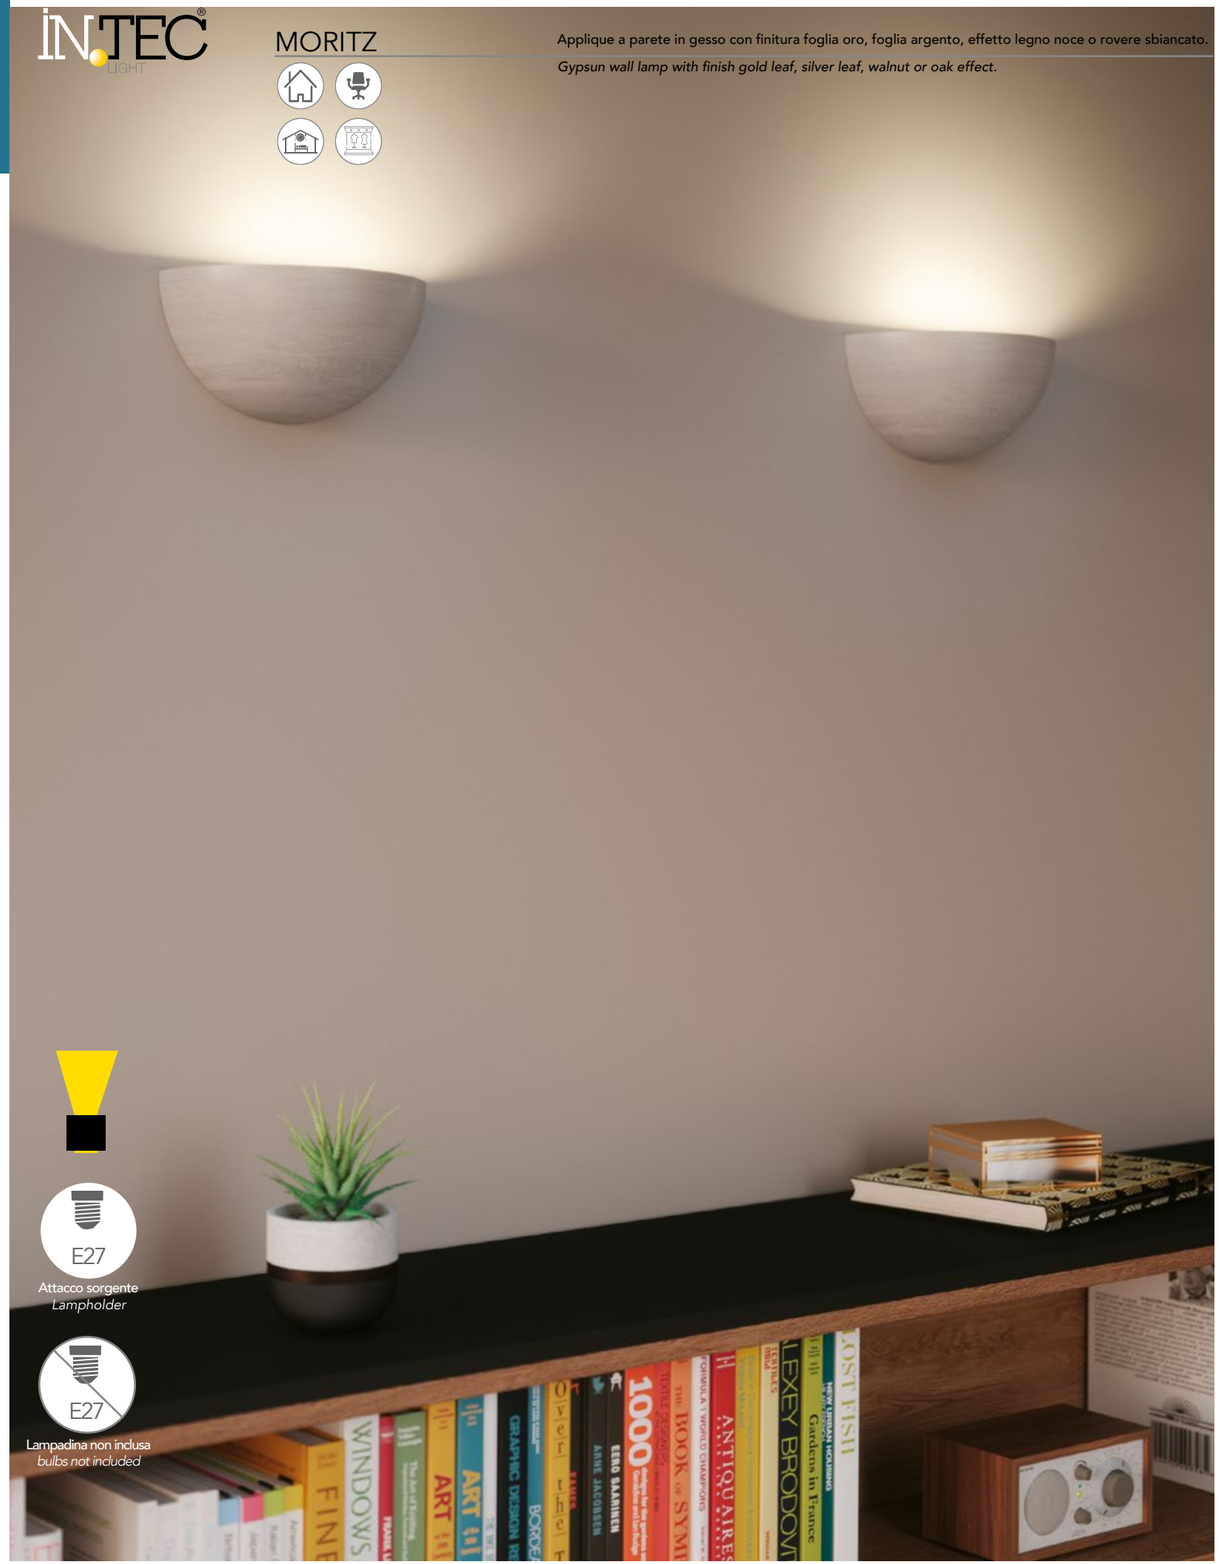



I-MORITZ-S-ORO-AP
8031414866458
1XE27 MAX 40W

Misure - Size
dimensioni in mm - size mm





I-MORITZ-S-SIL-AP
8031414866489
1XE27 MAX 40W

Misure - Size
dimensioni in mm - size mm





I-MORITZ-S-BG-AP
8031414865338
1XE27 MAX 40W

Misure - Size
dimensioni in mm - size mm





I-MORITZ-S-NOC-AP
8031414865352
1XE27 MAX 40W

Misure - Size
dimensioni in mm - size mm



LIVIGNO

Applique a parete in gesso bianco verniciabile o foglia oro o foglia argento

White gypsun wall lamp paintable gold leaf or silver leaf

G9

Attacco sorgente
Lampholder

G9

Lampadina non inclusa
bulbs not included





I-LIVIGNO-AP **2XG9 MAX 25W**
8031414867561

Gesso Verniciabile
Gypsun paintable

Misure - Size
dimensioni in mm - size mm





I-LIVIGNO-AP ORO **2XG9 MAX 25W**
8031414867578

Misure - Size
dimensioni in mm - size mm





I-LIVIGNO-AP SIL **2XG9 MAX 25W**
8031414867585

Misure - Size
dimensioni in mm - size mm



ALMA

Applique a parete in gesso bianco verniciabile o foglia oro o foglia argento

White gypsun wall lamp paintable gold leaf or silver leaf

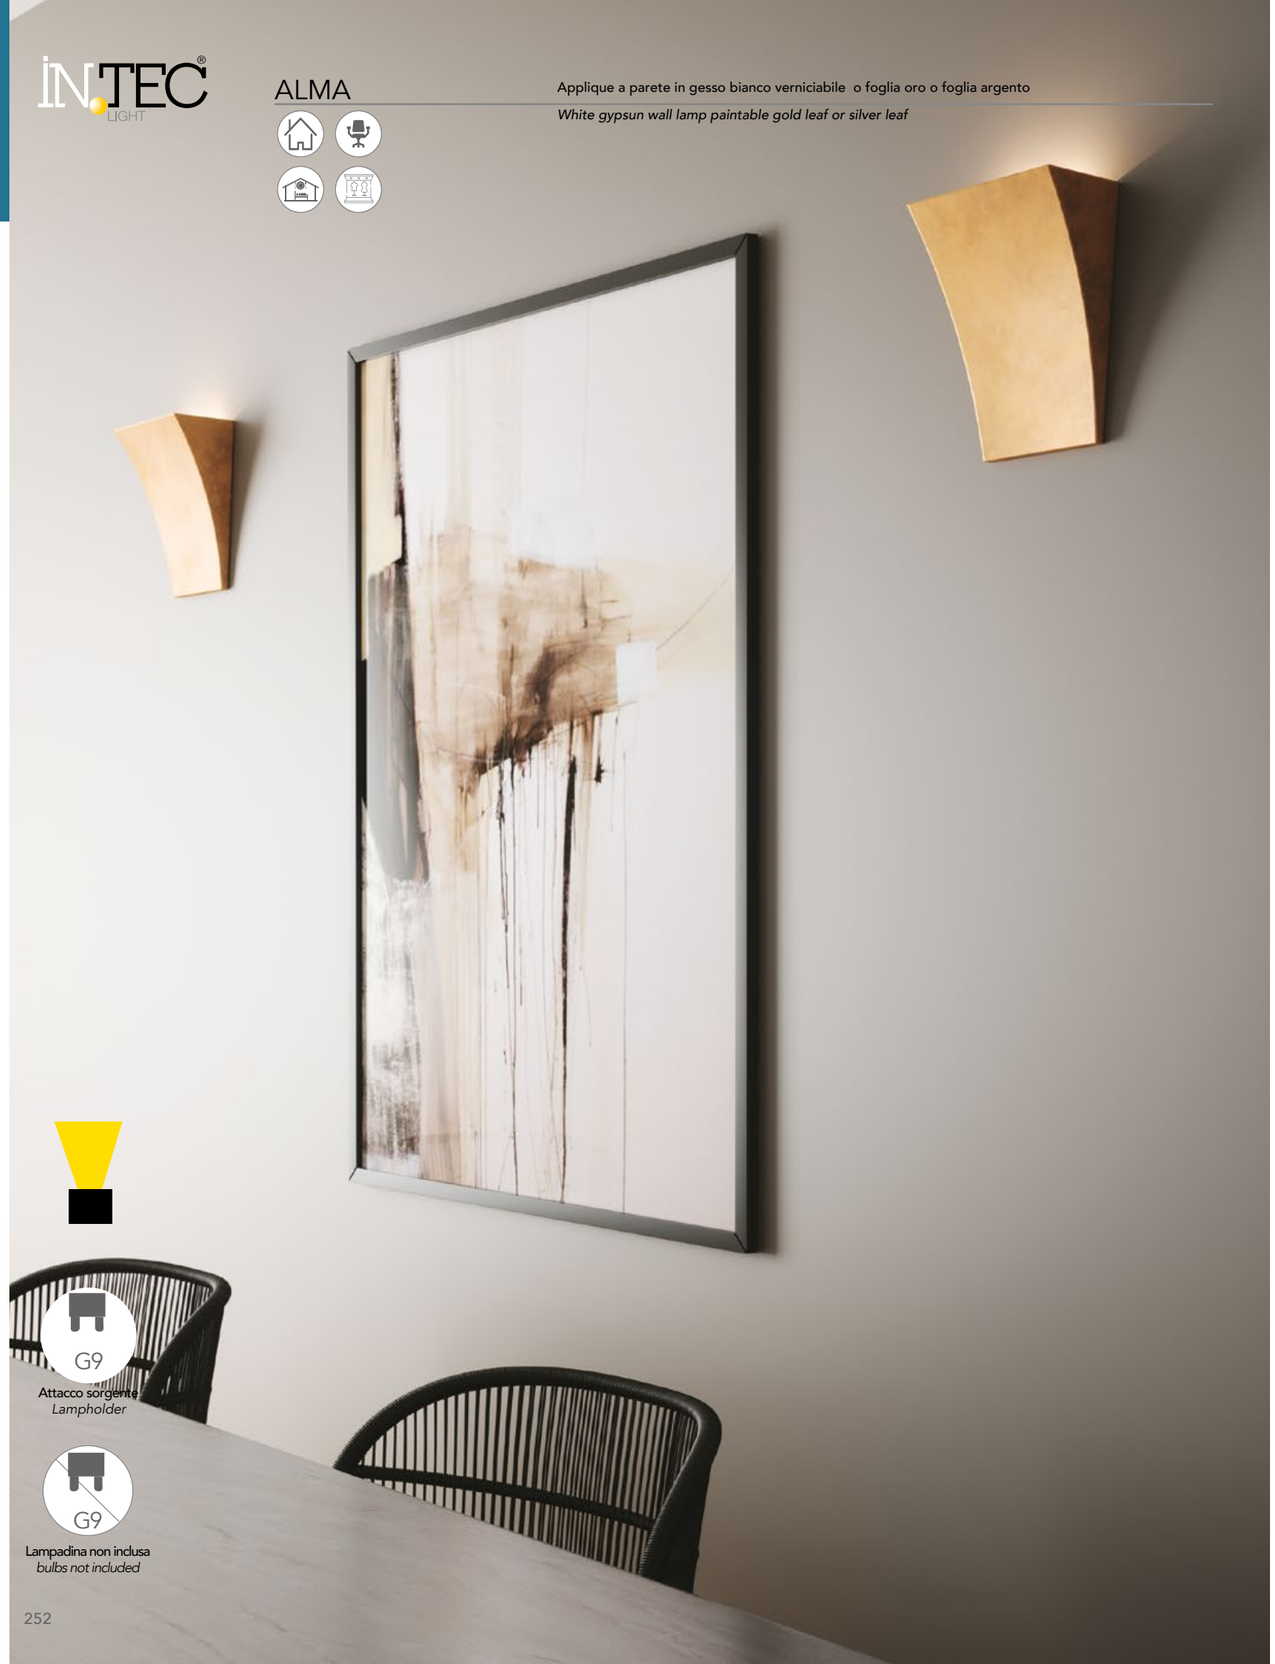

G9

Attacco sorgente
Lampholder

G9

Lampadina non inclusa
bulbs not included



I-ALMA-AP
8031414866496

2XG9 MAX 25W

Verniciabile
Paintable

Misure - Size
dimensioni in mm - size mm





I-ALMA-AP SIL
8031414867554

2XG9 MAX 25W

Misure - Size
dimensioni in mm - size mm





I-ALMA-AP ORO
8031414867547

2XG9 MAX 25W

Misure - Size
dimensioni in mm - size mm



AILERON

Applique a LED orientabile in alluminio bianco sabbiato o bronzo sabbiato

Adjustable aluminium LED wall lamp sand white or sand bronze

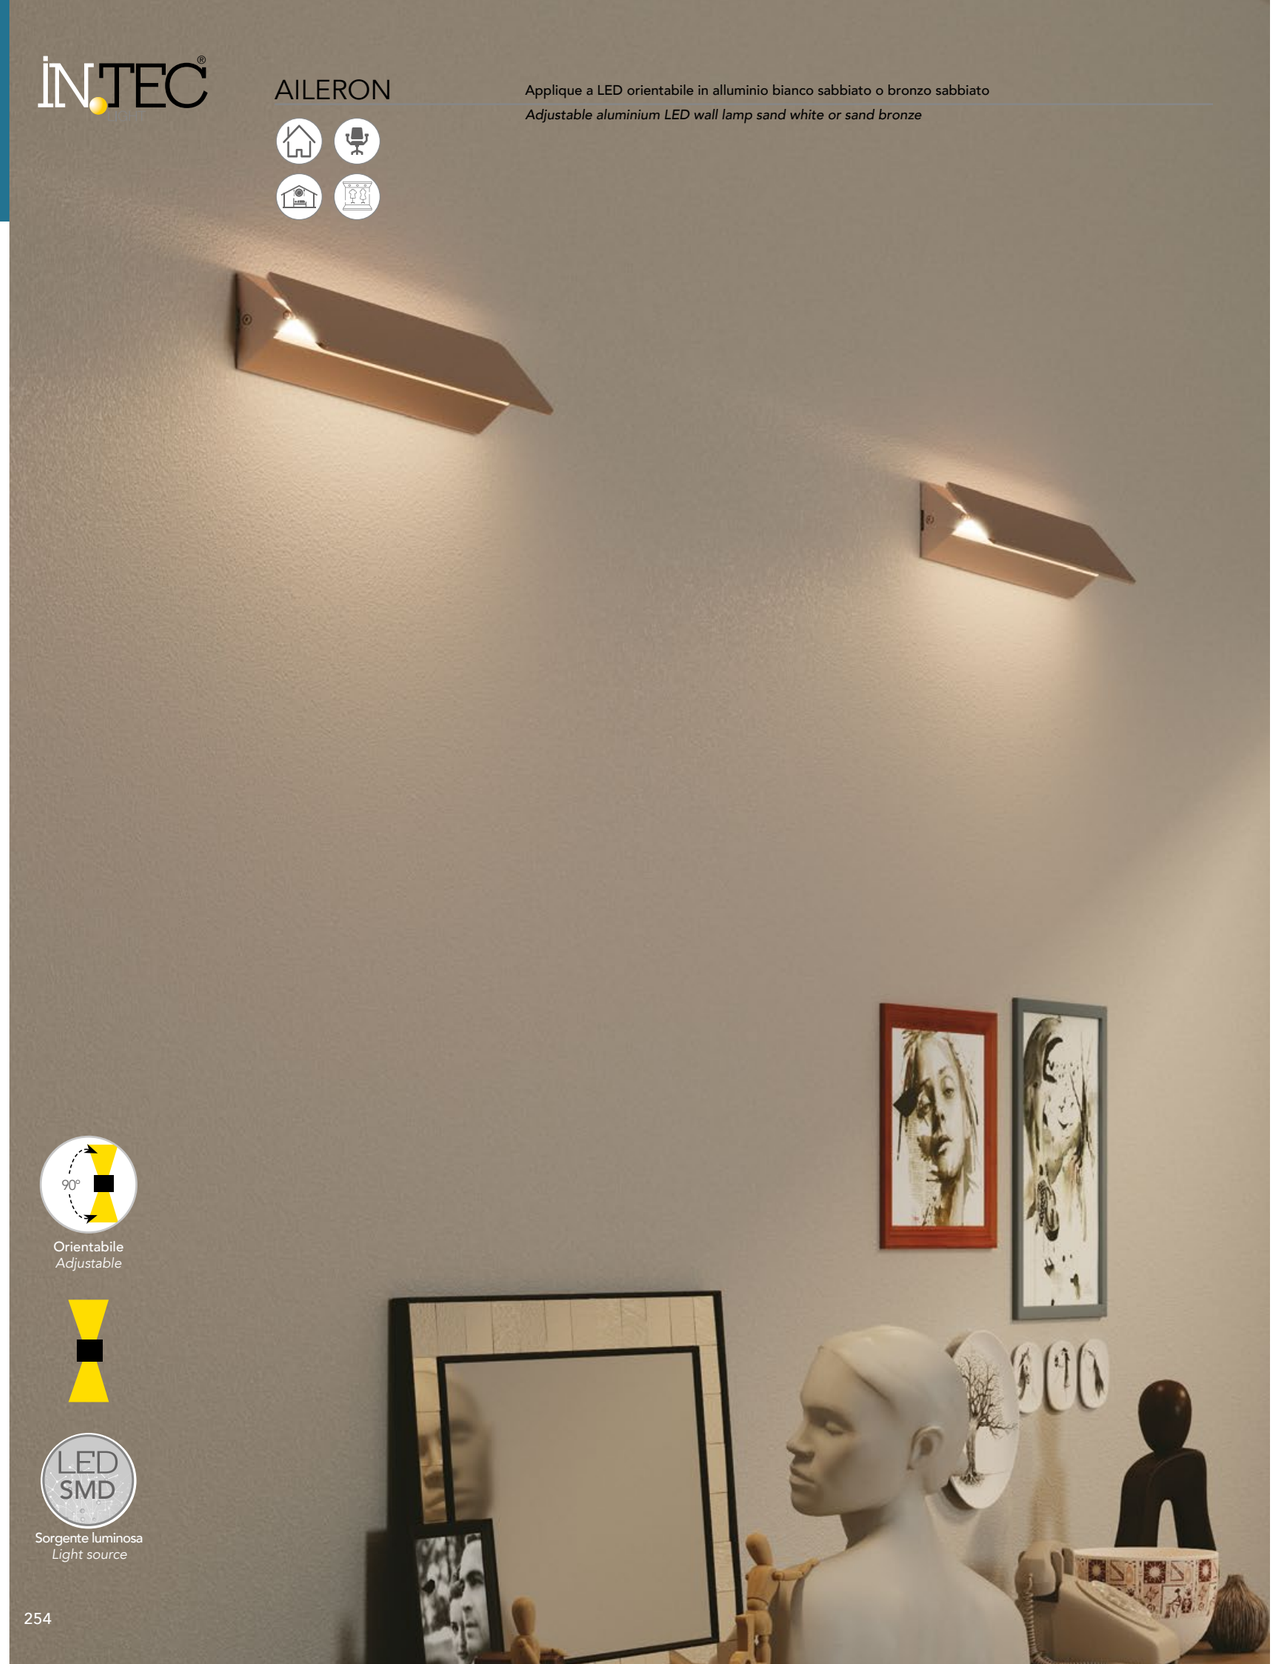

90°

Orientabile
Adjustable

LED SMD

Sorgente luminosa
Light source

AILERON

Driver
incluso

Sorgente luminosa
LED SMD 10W

Temperatura colore
4000K

Flusso luminoso
700 Lm

Angolo di luce
↑120° + ↓120°

CRI
>80

Driver
included

Light source
LED SMD 10W

Colour temperature
4000K

Luminous flux
700 Lm

Beam angle
↑120° + ↓120°

CRI
>80



LED-W-AILERON BCO **10W**
8031414876938

Misure - size
dimensioni in mm - size mm





LED-W-AILERON BRO **10W**
8031414876945

Misure - size
dimensioni in mm - size mm



SIGMA

Applique a LED in metallo cromato con diffusore in acrilico

Chrome metal LED wall lamp with acrylic diffuser

Driver
incluso
Sorgente luminosa
LED SMD 4W
Temperatura colore
3500K
Angolo di luce
120°
CRI
>80

Driver
included
Light source
LED SMD 4W
Colour temperature
3500K
Beam angle
120°
CRI
>80

Sorgente luminosa
Light source

Orientabile
Adjustable



LED-W-SIGMA/4W **4W - 320 Lm**
8031432971202

Misure - size
dimensioni in mm - size mm



ANDROMEDA

Applique a LED in metallo cromato

Chrome metal LED wall lamp

Driver
incluso
Sorgente luminosa
LED SMD 4W
Temperatura colore
3500K
Angolo di luce
120°
CRI
>80

Driver
included
Light source
LED SMD 4W
Colour temperature
3500K
Beam angle
120°
CRI
>80

Sorgente luminosa
Light source



LED-W-ANDROMEDA/4W **4W - 280 Lm**
8031432941205

Misure - size
dimensioni in mm - size mm



ATLAS

Applique a LED in alluminio bianco goffrato

Aluminium LED wall lamp embossed white

Driver
incluso
Sorgente luminosa
LED SMD 6W
Temperatura colore
3500K
Angolo di luce
↑90° + ↓90°
CRI
>80

Driver
included
Light source
LED SMD 6W
Colour temperature
3500K
Beam angle
↑90° + ↓90°
CRI
>80

Sorgente luminosa
Light source

Biemission light

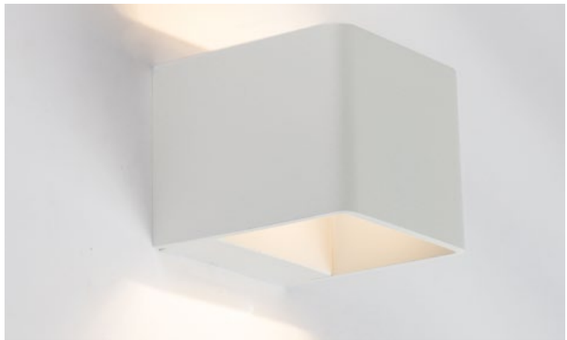

LED-W-ATLAS/6W **6W - 400 Lm**
8031433071208

Misure - size
dimensioni in mm - size mm



OMEGA

Applique a LED in alluminio bianco goffrato

Aluminium LED wall lamp embossed white

Driver
incluso
Sorgente luminosa
LED SMD 5,5W
Temperatura colore
4000K
Angolo di luce
↑90° + ↓90°
CRI
>80

Driver
included
Light source
LED SMD 5,5W
Colour temperature
4000K
Beam angle
↑90° + ↓90°
CRI
>80

Sorgente luminosa
Light source

Biemission light

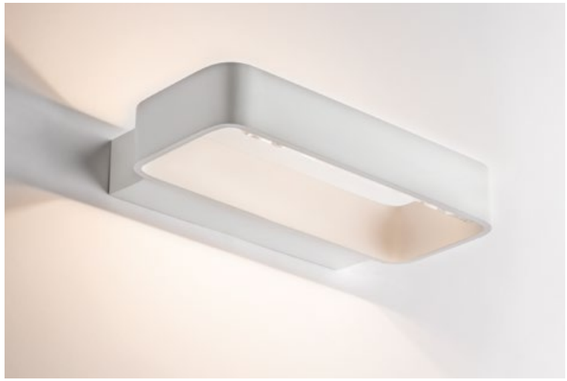

LED-W-OMEGA BCO **5,5W - 480 Lm**
8031414875467

Misure - size
dimensioni in mm - size mm



LAMBDA

Applique a LED in alluminio bianco goffrato

Metal LED wall lamp embossed white



LED SMD

Sorgente luminosa
Light source

Driver
incluso

Sorgente luminosa
LED SMD 4W

Temperatura colore
3500K

Flusso luminoso
320 Lm

Angolo di luce
90° + 90°

CRI
>80

Driver
included

Light source
LED SMD 4W

Colour temperature
3500K

Luminous flux
320 Lm

Beam angle
90° + 90°

CRI
>80



LED-W-LAMBDA/4W 8031433001205	**4W**

Misure - Size
dimensioni in mm - size mm



ALCOR

Applique a LED in alluminio bianco goffrato o silver goffrato

Aluminium LED wall lamp embossed white or silver

LED SMD

Sorgente luminosa
Light source

Driver
incluso

Sorgente luminosa
LED SMD 5W

Temperatura colore
3000K

Flusso luminoso
500 Lm

Angolo di luce
120°

CRI
>80

Driver
included

Light source
LED SMD 5W

Colour temperature
3000K

Luminous flux
500 Lm

Beam angle
120°

CRI
>80



LED-W-ALCOR/5W BCO 8031440355186	**5W**

Misure - size
dimensioni in mm - size mm





LED-W-ALCOR/5W SIL 8031440355148	**5W**

Misure - size
dimensioni in mm - size mm



GRADO

Applique a LED in alluminio bianco goffrato

Aluminium LED wall lamp embossed white



Sorgente luminosa
Light source



Driver
incluso

Sorgente luminosa
LED SMD 10W

Temperatura colore
4000K

Flusso luminoso
800 Lm

Angolo di luce
120°

CRI
>80

Driver
included

Light source
LED SMD 10W

Colour temperature
4000K

Luminous flux
800 Lm

Beam angle
120°

CRI
>80

LED-W-GRADO 8031440361194	**10W**

Misure - Size
dimensioni in mm - size mm



KITE

Applique a LED in alluminio bianco o nero laccato lucido

Aluminium LED wall lamp glossy lacquered black or white

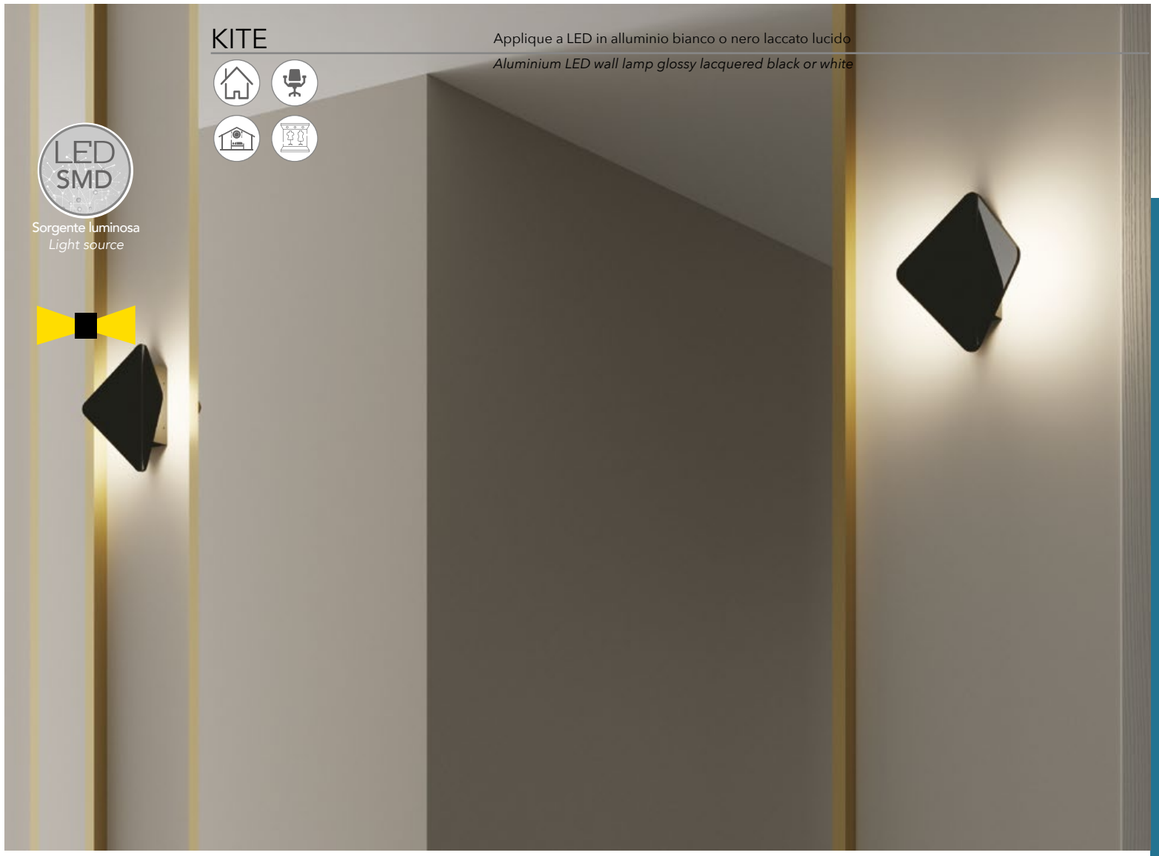

Sorgente luminosa
Light source



Driver
incluso

Sorgente luminosa
LED SMD 2x3W

Temperatura colore
4000K

Flusso luminoso
540 Lm

Angolo di luce
120°◄ + 120°►

CRI
>80

Driver
included

Light source
LED SMD 2x3W

Colour temperature
4000K

Luminous flux
540 Lm

Beam angle
120°◄ + 120°►

CRI
>80

LED-W-KITE BCO 8031440361170	**2X3W**
LED-W-KITE NERO 8031440361187	**2X3W**

Misure - Size
dimensioni in mm - size mm



MUSTANG

Applique a LED in alluminio bianco goffrato

Aluminium LED wall lamp embossed white



Sorgente luminosa
Light source

LED SMD

Driver
incluso

Sorgente luminosa
LED SMD 8W - 15W

Temperatura colore
4000K

Flusso luminoso
640 Lm - 1200 Lm

Angolo di luce
120°

CRI
>80

Driver
included

Light source
LED SMD 8W - 15W

Colour temperature
4000K

Luminous flux
640 Lm - 1200 Lm

Beam angle
120°

CRI
>80



LED-W-MUSTANG-200 — **8W - 640 Lm**
8031440361156

Misure - Size
dimensioni in mm - size mm





LED-W-MUSTANG-600 — **15W - 1200 Lm**
8031440361149

Misure - Size
dimensioni in mm - size mm



TWILIGHT

Applique LED in alluminio bianco goffrato con diffusore movibile

Embossed white aluminium wall lamp with adjustable diffuser

LED SMD
Sorgente luminosa
Light source

350°
Adjustable





Driver
incluso
Sorgente luminosa
LED SMD 4W
Temperatura colore
4000K
Flusso luminoso
288 Lm
Angolo di luce
107°
CRI
>80

Driver
incluso
Light source
LED SMD 4W
Colour temperature
4000K
Luminous flux
288 Lm
Beam angle
107°
CRI
>80

LED-W-TWILIGHT 8031440361088	**4W**

Misure - Size
dimensioni in mm - size mm



OMNIA

Applique LED dimmerabile in alluminio, bianco goffrato orientabile

Dimmable aluminum adjustable LED wall lamp, in embossed white

LED SMD
Sorgente luminosa
Light source

320°
Adjustable

1 10
Dimmerabile
Dimmable

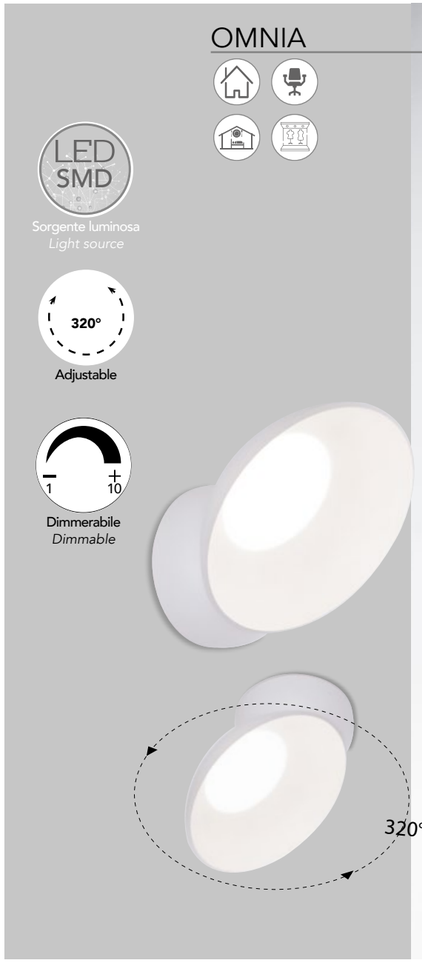





Driver
incluso
Sorgente luminosa
LED SMD 15W
Temperatura colore
3000K
Flusso luminoso
1300 Lm
Angolo di luce
107°
CRI
>80

Driver
incluso
Light source
LED SMD 15W
Colour temperature
3000K
Luminous flux
1300 Lm
Beam angle
107°
CRI
>80

LED-W-OMNIA/15W 8031440351423	**15W**

Misure - Size
dimensioni in mm - size mm



GRECALE

Plafoniera con ventilatore

Ceiling lamp with fan



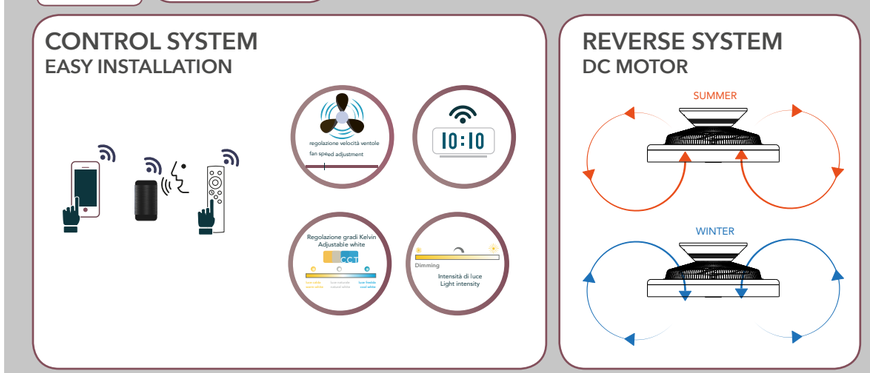

Materiale
Alluminio - acrilico

Sorgente luminosa
LED SMD integrato 80W

Driver
incluso

Temperatura colore



Punti luce
1

Flusso
8000 Lm

Angolo di luce
120°

CRI
>80

Potenza ventilatore
DC22W 6 velocità

Volume aria
20 m³ min.

Livello sonoro
48 dB

Materiale ventilatore
7 lame bianche in termoplastica

Caratteristiche ventilatore
7 lame ultra silenziose con rotazione bilaterale

Material
Aluminum - acrylic

Light source
80W Built-in LED

Driver
included

Color temperature



Light spot
1

Luminous flux
8000 Lm

Beam angle
120°

CRI
>80

Fan power
DC22W 6 fan speed

Air volume
20 m³ min.

Sound level
48 dB

Fan material
7 white thermoplastic blades

Fan characteristics
7 ultra-silent blades



LED-GRECALE-W-INT
8031414885947

LED 80W 220-240V ~ 50/60Hz integrato
FAN 22W 220-240V ~ 50/60Hz

Misure
dimensioni in mm





LED-GRECALE-B-INT
8031414885954

LED 80W 220-240V ~ 50/60Hz integrato
FAN 22W 220-240V ~ 50/60Hz

Misure
dimensioni in mm



LEVANTE

Plafoniera con ventilatore

Materiale
Acrilico PMMA

Sorgente luminosa
LED SMD integrato 40W

Driver
incluso

Temperatura colore

Flusso
3600 Lm

Angolo di luce
120°

CRI
>80

Potenza ventilatore
DC22W 6 velocità

Volume aria
20 m³ min.

Livello sonoro
48 dB

Materiale ventilatore
7 lame bianche in termoplastica

Caratteristiche ventilatore
7 lame ultra silenziose con rotazione bilaterale
Ghiera esterna roteante per una maggiore diffusione dell'aria

Ceiling lamp with fan

Material
PMMA acrylic

Light source
40W Built-in LED

Driver
included

Color temperature

Luminous flux
3600 Lm

Beam angle
120°

CRI
>80

Fan power
DC22W 6 fan speed

Air volume
20 m³ min.

Sound level
48 dB

Fan material
7 white thermoplastic blades

Fan characteristics
7 ultra-silent blades bidirectional rotation rotating outer ring for greater air diffusion





RF 2.4G CONTROL SYSTEM
incluso
included

VIDEO TUTORIAL

3 STEP CCT
memory function

LED-LEVANTE-INT
8031414885930

LED 40W 220-240V ~ 50/60Hz integrato
FAN 22W 220-240V ~ 50/60Hz

Misure
dimensioni in mm



CONTROL SYSTEM
EASY INSTALLATION

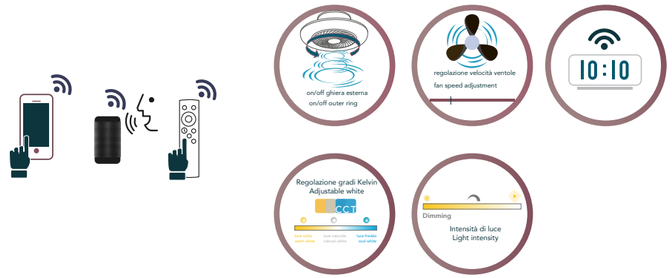

REVERSE SYSTEM
DC MOTOR



SCIROCCO

Plafoniera con ventilatore

Materiale
Acrilico PMMA

Sorgente luminosa
LED SMD integrato 40W

Driver
incluso

Temperatura colore

Flusso
3600 Lm

Angolo di luce
120°

CRI
>80

Potenza ventilatore
DC22W 6 velocità

Volume aria
20 m³ min.

Livello sonoro
48 dB

Materiale ventilatore
7 lame bianche in termoplastica

Caratteristiche ventilatore
7 lame ultra silenziose con rotazione bilaterale
Ghiera esterna roteante per una maggiore diffusione dell'aria

Ceiling lamp with fan

Material
PMMA acrylic

Light source
40W Built-in LED

Driver
included

Color temperature

Luminous flux
3600 Lm

Beam angle
120°

CRI
>80

Fan power
DC22W 6 fan speed

Air volume
20 m³ min.

Sound level
48 dB

Fan material
7 white thermoplastic blades

Fan characteristics
7 ultra-silent blades bidirectional rotation rotating outer ring for greater air diffusion





RF 2.4G CONTROL SYSTEM
incluso
included

VIDEO TUTORIAL

3 STEP CCT
memory function

LED-SCIROCCO-INT
8031414885923

LED 40W 220-240V ~ 50/60Hz integrato
FAN 22W 220-240V ~ 50/60Hz

Misure
dimensioni in mm



CONTROL SYSTEM
EASY INSTALLATION

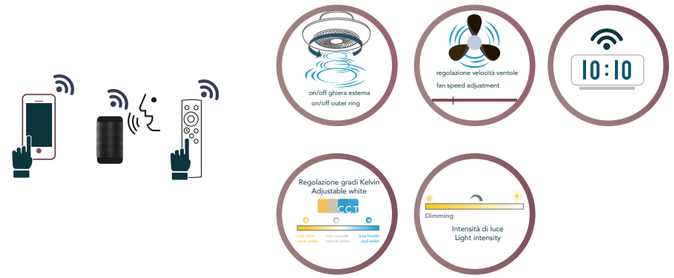

REVERSE SYSTEM
DC MOTOR



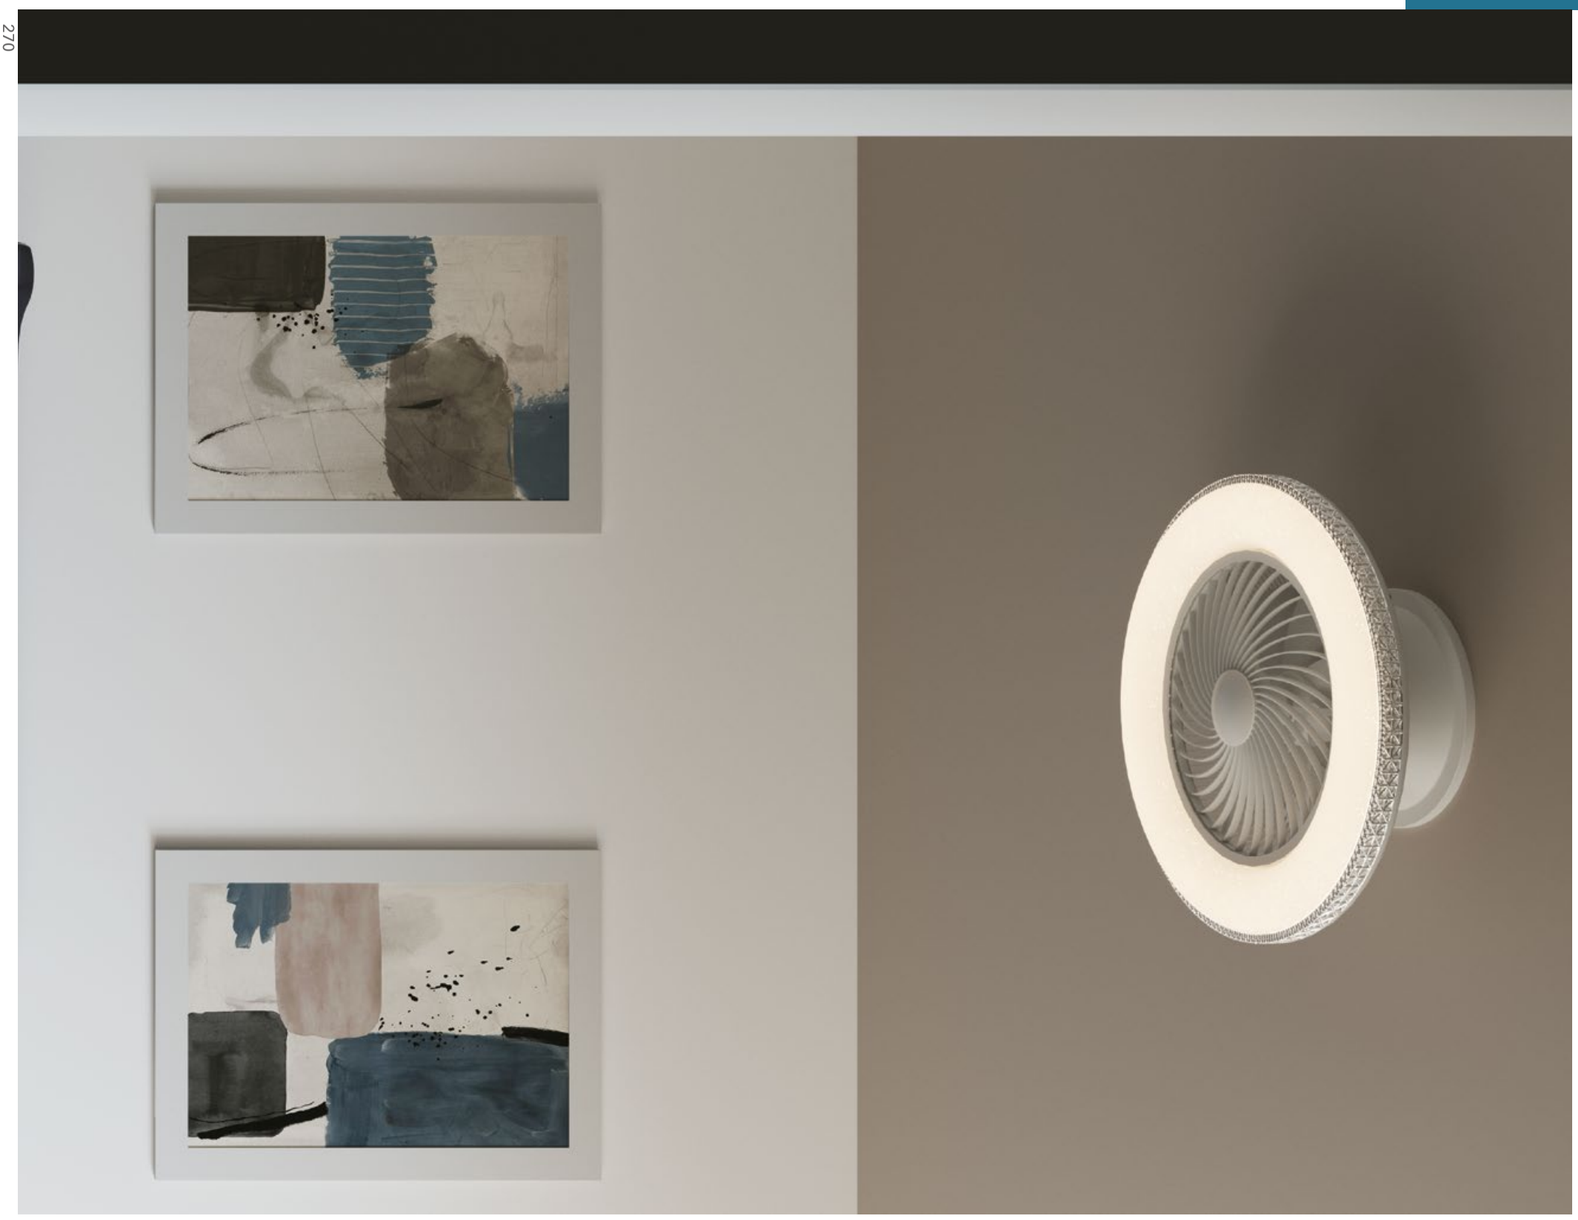



BOREA

Plafoniera con ventilatore

Ceiling lamp with fan



Materiale
Acrilico PMMA

Material
PMMA acrylic

Sorgente luminosa
LED SMD integrato 40W

Light source
40W Built-in LED

Driver
incluso

Driver
included

Temperatura colore

Color temperature



Flusso
3600 Lm

Luminous flux
3600 Lm

Angolo di luce
120°

Beam angle
120°

CRI
>80

CRI
>80

Potenza ventilatore
AC 34W - 900rpm 1050rpm 1200rpm

Fan power
AC 34W - 900rpm 1050rpm 1200rpm

Volume aria
20 m³ min.

Air volume
20 m³ min.

Livello sonoro
48 dB

Sound level
48 dB

Materiale ventilatore
7 lame bianche in termoplastica

Fan material
7 white thermoplastic blades

Caratteristiche ventilatore
7 lame ultra silenziose con rotazione unilaterale
Ghiera esterna roteante per una maggiore diffusione dell'aria

Fan characteristics
7 ultra-silent blades unidirectional rotation rotating outer ring for greater air diffusion



RF 2.4G CONTROL SYSTEM
incluso
included

VIDEO TUTORIAL

LED-BOREA-INT
8031414873692

LED 40W 220-240V ~ 50/60Hz integrato
FAN 34W 220-240V ~ 50/60Hz

Misure
dimensioni in mm



3 STEP CCT
memory function
luce calda warm white
luce naturale natural white
luce fredda cool white
ON
OFF

CONTROL SYSTEM
EASY INSTALLATION

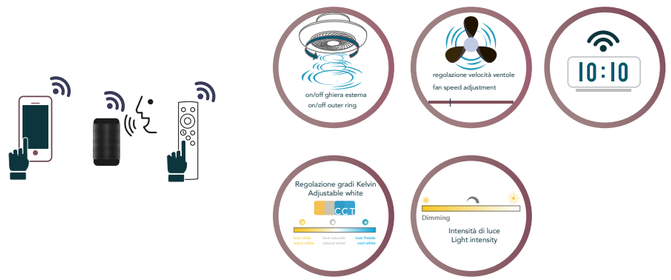

SKYRON

Plafoniera con ventilatore

Ceiling lamp with fan



Materiale
Acrilico PMMA

Material
PMMA acrylic

Sorgente luminosa
LED SMD integrato 40W

Light source
40W Built-in LED

Driver
incluso

Driver
included

Temperatura colore

Color temperature



Flusso
3600 Lm

Luminous flux
3600 Lm

Angolo di luce
120°

Beam angle
120°

CRI
>80

CRI
>80

Potenza ventilatore
AC 34W - 900rpm 1050rpm 1200rpm

Fan power
AC 34W - 900rpm 1050rpm 1200rpm

Volume aria
20 m³ min.

Air volume
20 m³ min.

Livello sonoro
48 dB

Sound level
48 dB

Materiale ventilatore
7 lame bianche in termoplastica

Fan material
7 white thermoplastic blades

Caratteristiche ventilatore
7 lame ultra silenziose con rotazione unilaterale
Ghiera esterna roteante per una maggiore diffusione dell'aria

Fan characteristics
7 ultra-silent blades unidirectional rotation rotating outer ring for greater air diffusion



RF 2.4G CONTROL SYSTEM
incluso
included

VIDEO TUTORIAL

LED-SKYRON-INT
8031414873678

LED 40W 220-240V ~ 50/60Hz integrato
FAN 34W 220-240V ~ 50/60Hz

Misure
dimensioni in mm



3 STEP CCT
memory function
luce calda warm white
luce naturale natural white
luce fredda cool white
ON
OFF

CONTROL SYSTEM
EASY INSTALLATION

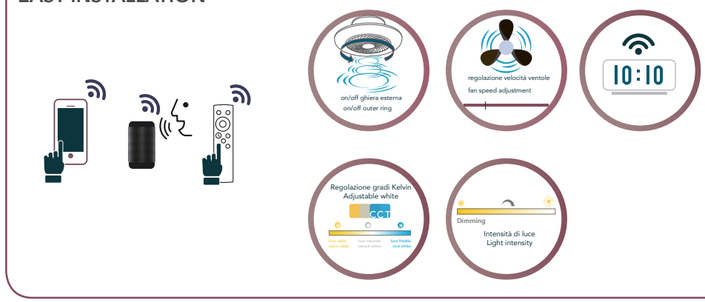

ALISEO

Plafoniera con ventilatore

Ceiling lamp with fan



Materiale
Acrilico PMMA

Material
PMMA acrylic

Sorgente luminosa
LED SMD integrato 40W

Light source
40W Built-in LED

Driver
incluso

Driver
included

Temperatura colore

Color temperature



Flusso
3600 Lm

Luminous flux
3600 Lm

Angolo di luce
120°

Beam angle
120°

CRI
>80

CRI
>80

Potenza ventilatore
AC 34W - 900rpm 1050rpm 1200rpm

Fan power
AC 34W - 900rpm 1050rpm 1200rpm

Volume aria
20 m³ min.

Air volume
20 m³ min.

Livello sonoro
48 dB

Sound level
48 dB

Materiale ventilatore
7 lame bianche in termoplastica

Fan material
7 white thermoplastic blades

Caratteristiche ventilatore
7 lame ultra silenziose con rotazione unilaterale
Ghiera esterna roteante per una maggiore diffusione dell'aria

Fan characteristics
7 ultra-silent blades unidirectional rotation
rotating outer ring for greater air diffusion



RF 2.4G CONTROL SYSTEM
incluso
included

VIDEO TUTORIAL

LED-ALISEO-INT
8031414873661

LED 40W 220-240V ~ 50/60Hz integrato
FAN 34W 220-240V ~ 50/60Hz

Misure
dimensioni in mm



3 STEP CCT
memory function
luce calda warm white
luce naturale natural white
luce fredda cool white
ON
OFF

CONTROL SYSTEM
EASY INSTALLATION

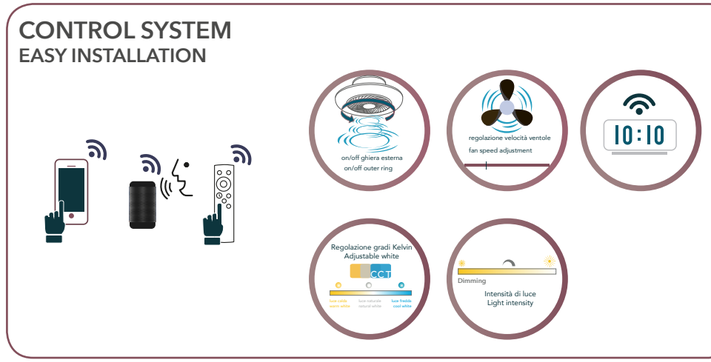

FOEHN

Plafoniera con ventilatore

Ceiling lamp with fan



Materiale
Acrilico PMMA bianco effetto cielo stellato

Material
PMMA acrylic *white colour with starry sky effect*

Sorgente luminosa
LED SMD integrato 40W

Light source
40W Built-in LED

Driver
incluso

Driver
included

Temperatura colore

Color temperature



Flusso
3600 Lm

Luminous flux
3600 Lm

Angolo di luce
120°

Beam angle
120°

CRI
>80

CRI
>80

Potenza ventilatore
AC 34W - 900rpm 1050rpm 1200rpm

Fan power
AC 34W - 900rpm 1050rpm 1200rpm

Volume aria
20 m³ min.

Air volume
20 m³ min.

Livello sonoro
48 dB

Sound level
48 dB

Materiale ventilatore
7 lame trasparenti in termoplastica

Fan material
7 wtrasparent thermoplastic blades

Caratteristiche ventilatore
7 lame ultra silenziose con rotazione unilaterale

Fan characteristics
7 ultra-silent blades unidirectional rotation



RF 2.4G CONTROL SYSTEM
incluso
included

VIDEO TUTORIAL

LED-FOEHN-INT
8031414873685

LED 40W 220-240V ~ 50/60Hz integrato
FAN 34W 220-240V ~ 50/60Hz

Misure
dimensioni in mm



3 STEP CCT
memory function
luce calda warm white
luce naturale natural white
luce fredda cool white
ON
OFF

CONTROL SYSTEM
EASY INSTALLATION

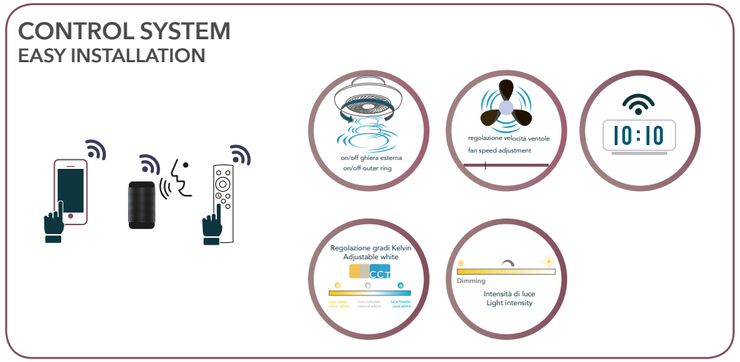

MOON

Plafoniera a LED in acrilico effetto cielo stellato

LED acrylic ceiling lamp with diffuser starry sky effect

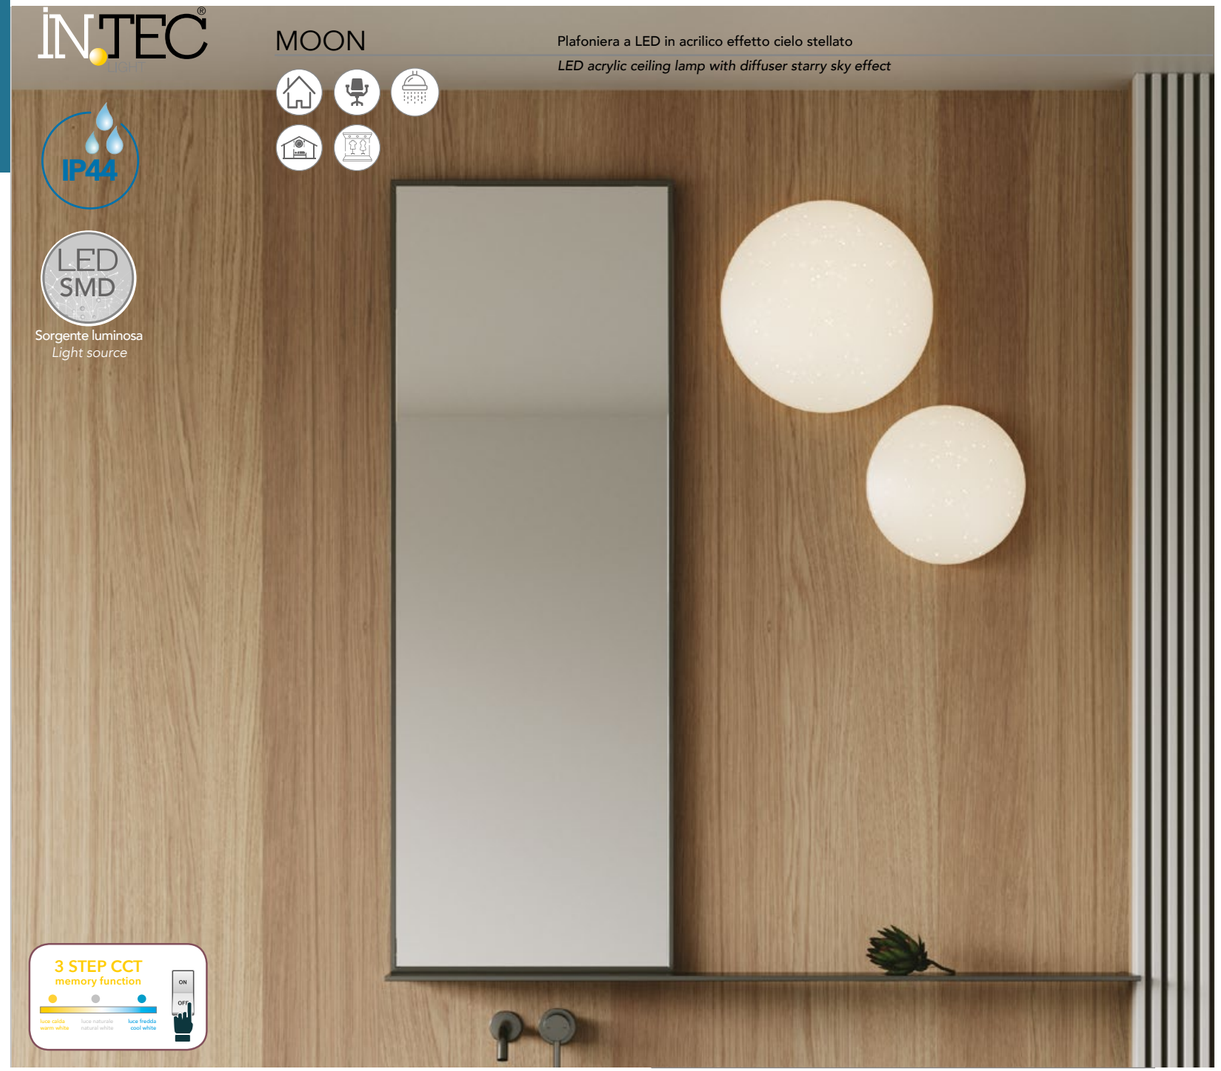

Materiale
Acrilico PMMA

Colore
Bianco effetto cielo stellato

Driver
integrato

Sorgente luminosa
LED SMD 18W- 24W

Temperatura colore
4000K CCT

Angolo di luce
120°

CRI
>80

Material
PMMA acrylic

Colour
White with starry sky effect

Driver
Built-in driver

Light source
LED SMD 18W- 24W

Color temperature
4000K CCT

Beam angle
120°

CRI
>80



I-MOON-R30 — 8031414862672 — 18W- 1800 Lm

I-MOON-R30-CCT — 8031414879847 — CCT — 18W- 1800 Lm

3 STEP CCT memory function

Misure - size
dimensioni in mm - size mm





I-MOON-R40 — 8031414862696 — 24W - 2400 Lm

I-MOON-R40-CCT — 8031414879823 — CCT — 24W - 2400 Lm

3 STEP CCT memory function

Misure - size
dimensioni in mm - size mm





I-MOON-Q28 — 8031414863648 — 18W- 1800 Lm

I-MOON-Q28-CCT — 8031414879854 — CCT — 18W- 1800 Lm

3 STEP CCT memory function

Misure - size
dimensioni in mm - size mm





I-MOON-Q38 — 8031414863655 — 24W - 2400 Lm

I-MOON-Q38-CCT — 8031414879830 — CCT — 24W - 2400 Lm

3 STEP CCT memory function

Misure - size
dimensioni in mm - size mm

IP44

LED SMD

Sorgente luminosa
Light source

RGB

MOON

Plafoniera a LED in acrilico effetto cielo stellato
LED acrylic ceiling lamp with diffuser starry sky effect

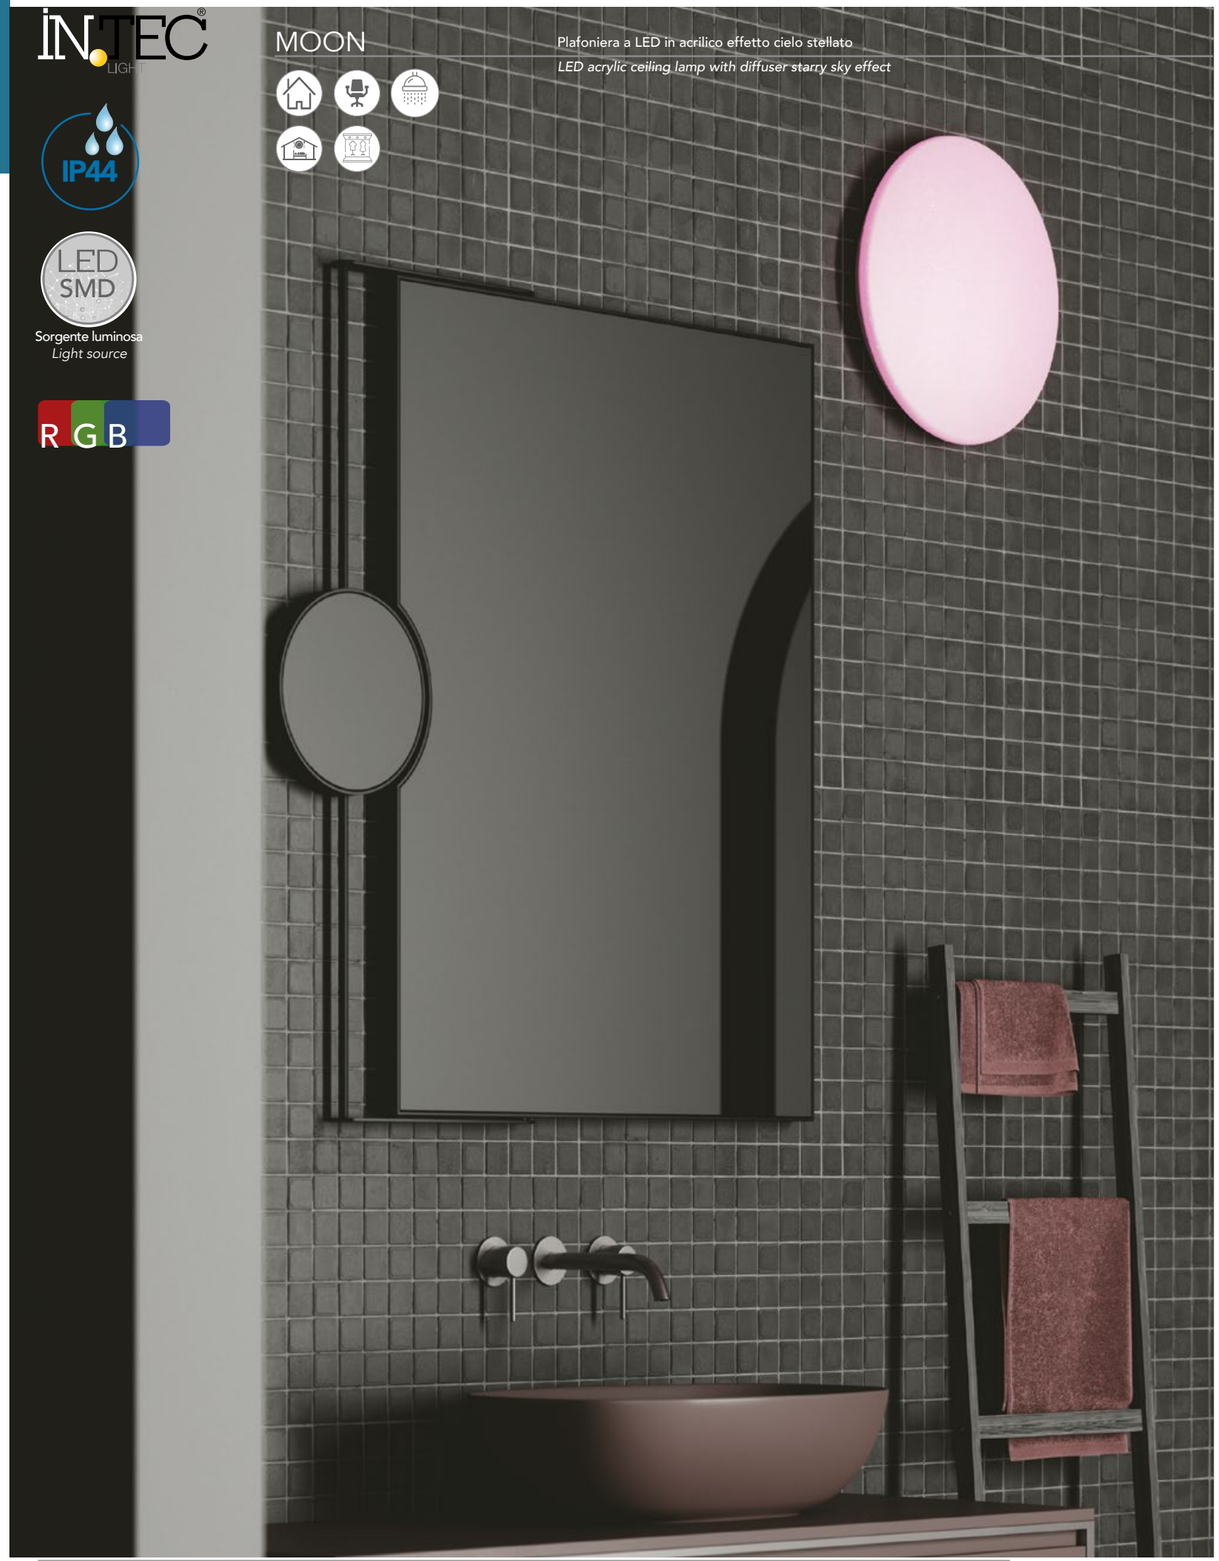

MOON

Plafoniera a LED in acrilico effetto cielo stellato
LED acrylic ceiling lamp with starry sky effect

SMART INTEC
Wi-Fi

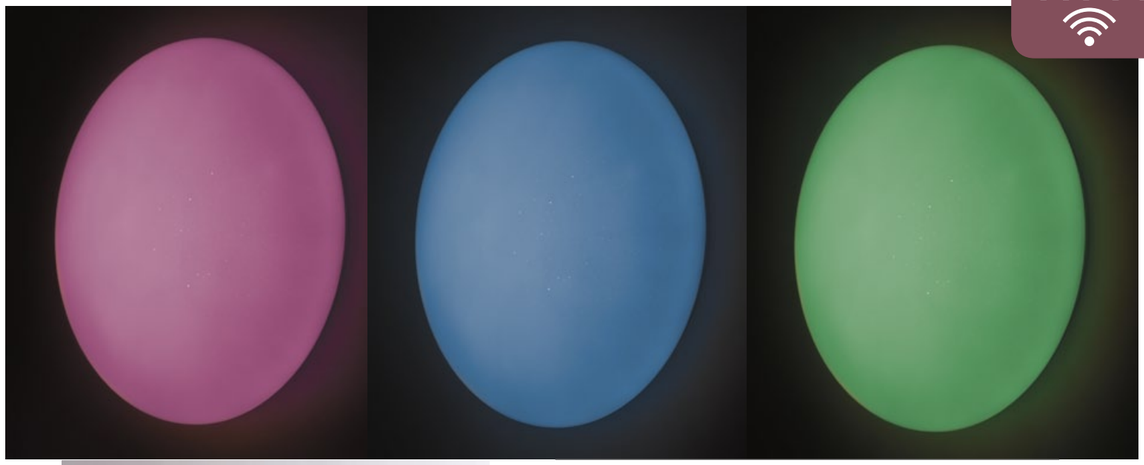



Materiale
Acrilico PMMA

Colore
Bianco effetto cielo stellato

Driver
integrato

Sorgente luminosa
LED SMD 24W

Temperatura colore
RGB + 4000K

Angolo di luce
120°

CRI
>80

Material
PMMA acrylic

Colour
White with starry sky effect

Driver
Built-in driver

Light source
LED SMD 24W

Color temperature
RGB + 4000K

Beam angle
120°

CRI
>80

I-MOON-R40-INT 8031414863488	**24W - 2000 LM**

Misure
dimensioni in mm







CE EMC

DOMO

Plafoniera in alluminio LED integrato

Aluminium LED ceiling lamp

IP44

LED SMD

Sorgente luminosa

Light source

DOMO



Materiale
Alluminio, diffusore in acrilico

Colore
Cromo, bianco

Sorgente luminosa
LED SMD 24W

Driver
incluso

Temperatura colore
4000K

Flusso luminoso
2200 Lm

Angolo di luce
120°

CRI
>80

Material
Aluminium, acrylic diffuser

Colour
Chrome, white

Light source
LED SMD 24W

Driver
included

Color temperature
4000K

Luminous flux
2200 Lm

Beam angle
120°

CRI
>80



LED-DOMO-Q24-BCO 8031414882762		**24W 2200LM**
LED-DOMO-Q24 8031414876235		**24W 2200LM**

Misure - size
dimensioni in mm - size mm





LED-DOMO-R24-BCO 8031414882762		**24W 2200LM**
LED-DOMO-R24 8031414876228		**24W 2200LM**

Misure - size
dimensioni in mm - size mm



IP44

UGR<19

LED SMD

Sorgente luminosa
Light source

BLASTER

Applique a LED con diffusore in policarbonato struttura cromata

LED wall lamp with polycarbonate diffuser and chrome structure



BLASTER

Materiale
Alluminio, diffusore in PC

Colore
Struttura cromata diffusore bianco

Sorgente luminosa
LED SMD 8W - 15W

Driver
Integrato

Temperatura colore
4000K

Flusso luminoso
1200 Lm - 640 Lm

UGR
<19

Angolo di luce
133°

CRI
>80

Material
Aluminium, PC diffuser

Colour
Chrome structure white diffuser

Light source
LED SMD 8W - 15W

Driver
Built-in driver

Color temperature
4000K

Luminous flux
1200 Lm - 640 Lm

UGR
<19

Beam angle
133°

CRI
>80

CE EMC



LED-BLASTER-60 8031414866526	15W - 1200 Lm	UGR<19

Misure - Size
dimensioni in mm - size mm



LED-BLASTER-PLUG 8031414866519	8W - 640 Lm	UGR<19

plug max 2000W

Misure - Size
dimensioni in mm - size mm



LANCER

Applique a LED in alluminio bianco o nero goffrato

Aluminium LED wall lamp embossed white or black finish

IP54

LED SMD

Sorgente luminosa
Light source

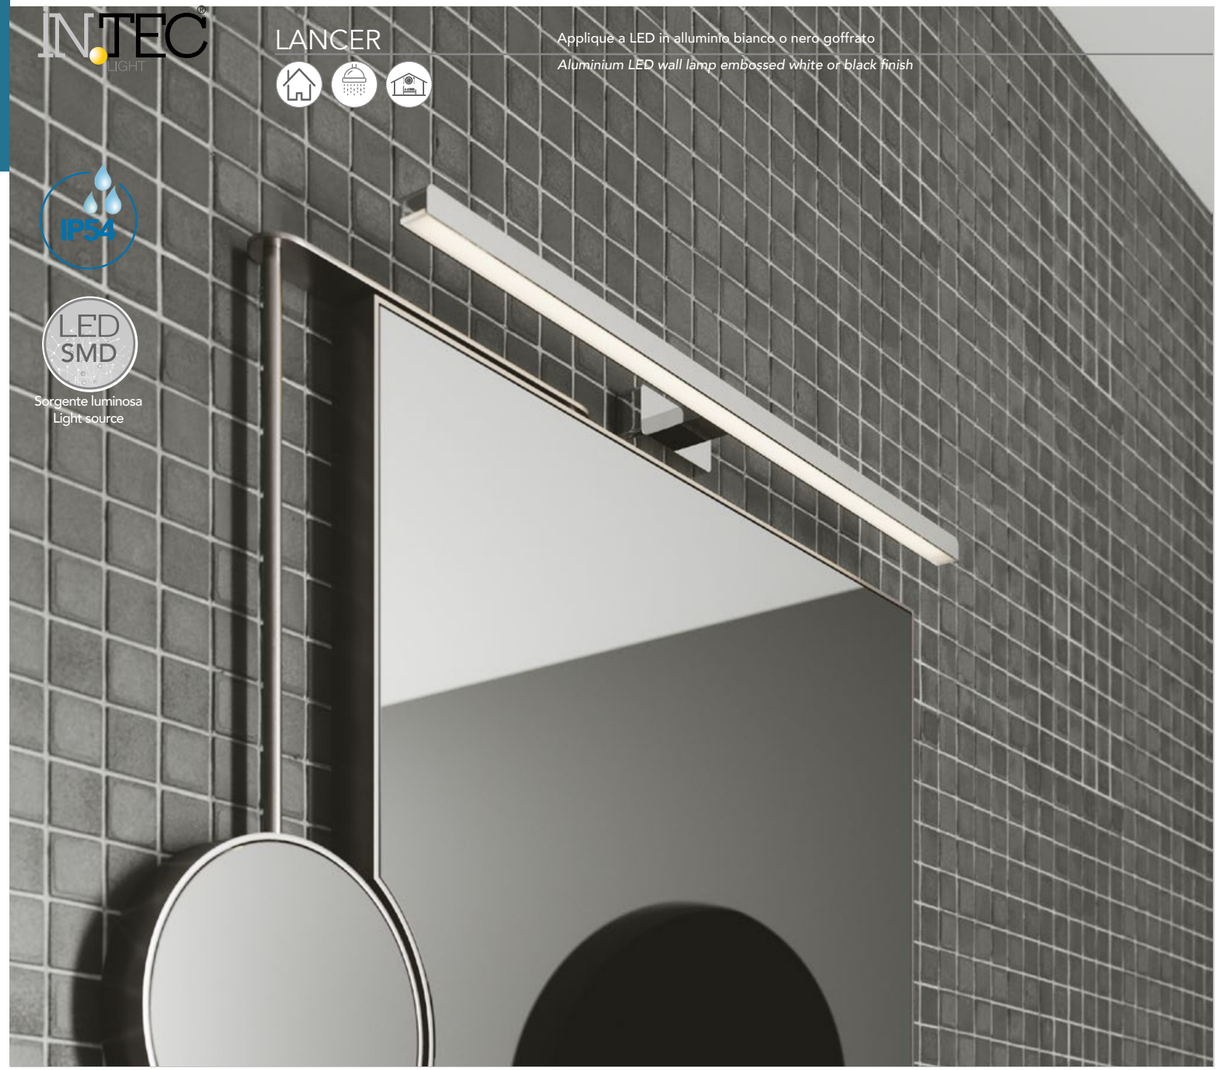

Materiale

Alluminio, diffusore in PC

Colore

Bianco goffrato - nero goffrato cromo - oro satinato

Sorgente luminosa

LED SMD 17W

Driver

Integrato

Temperatura colore

3000K - 4000K

Flusso luminoso

1360 Lm

Angolo di luce

120°

CRI

>80

Material

Aluminium, PC diffuser

Colour

Embossed white - embossed black chrome - satin gold

Light source

LED SMD 17W

Driver

Built-in driver

Color temperature

3000K - 4000K

Luminous flux

1360 Lm

Beam angle

120°

CRI

>80



LED-W-LANCER NERO
8031440361217 — 17W — 1360 LM



LED-W-LANCER-C BCO
8031414876679 — 17W — 1360 LM

LED-W-LANCER BCO
8031440361200 — 17W — 1360 LM



LED-W-LANCER CR
8031414882564 — 17W — 1360 LM

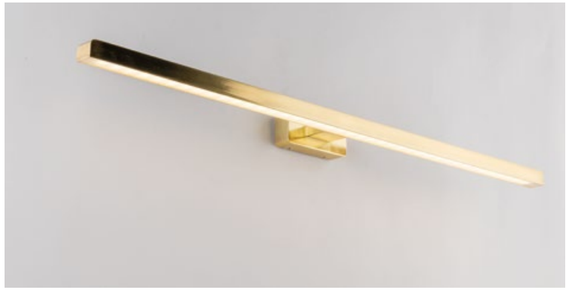

LED-W-LANCER ORO
8031414882571 — 17W — 1360 LM

Misure - Size
dimensioni in mm - size mm



Misure - Size
dimensioni in mm - size mm



Misure - Size
dimensioni in mm - size mm



Misure - Size
dimensioni in mm - size mm



SACS

Applique a LED in termoplastica e diffusore in acrilico

Thermoplastic LED wall lamp with acrylic diffuser

LED SMD
Sorgente luminosa
Light source

IP44

Driver
integrato

Sorgente luminosa
LED SMD 4,4W - 4,5W

Temperatura colore
4000K

Flusso luminoso
198 Lm - 200 Lm

Angolo di luce
120°

CRI
>80

Driver
built-in driver

Light source
LED SMD 4,4W - 4,5W

Colour temperature
4000K

Luminous flux
198 Lm - 200 Lm

Beam angle
120°

CRI
>80



SPOT-B-SACS
8031414870776
4,4W - 198 Lm

Fissaggio su cornice
Frame fixing

Misure - Size
dimensioni in mm - size mm





SPOT-B-SACS-XL
8031414877010
4,5W - 200 Lm

Fissaggio su cornice
Frame fixing

Fissaggio su specchio
Mirror fixing

Misure - Size
dimensioni in mm - size mm



RIVA

Applique a LED in alluminio e diffusore in acrilico

Aluminium LED wall lamp with acrylic diffuser

LED SMD
Sorgente luminosa
Light source

IP44

Driver
integrato

Sorgente luminosa
LED SMD 8W

Temperatura colore
4000K

Flusso luminoso
740 Lm

Angolo di luce
120°

CRI
>80

Driver
built-in driver

Light source
LED SMD 8W

Colour temperature
4000K

Luminous flux
740 Lm

Beam angle
120°

CRI
>80



SPOT-B-RIVA
8031440363457
8W - 740 Lm

Fissaggio su cornice
Frame fixing

Misure - Size
dimensioni in mm - size mm



CRUISE

Applique a LED in termoplastica e diffusore in acrilico

Thermoplastic LED wall lamp with acrylic diffuser

LED SMD
Sorgente luminosa
Light source

IP44

Driver
integrato

Sorgente luminosa
LED SMD 5,2W

Temperatura colore
4000K

Flusso luminoso
430 Lm

Angolo di luce
120°

CRI
>80

Driver
built-in driver

Light source
LED SMD 5,2W

Colour temperature
4000K

Luminous flux
430 Lm

Beam angle
120°

CRI
>80



SPOT-B-CRUISE
8031440363426
5,2W - 430 Lm

Fissaggio su cornice
Frame fixing

Fissaggio su specchio
Mirror fixing

Misure - Size
dimensioni in mm - size mm



AQA

Applique a LED in termoplastica e diffusore in acrilico

Thermoplastic LED wall lamp with acrylic diffuser

IP44

LED SMD

Sorgente luminosa
Light source

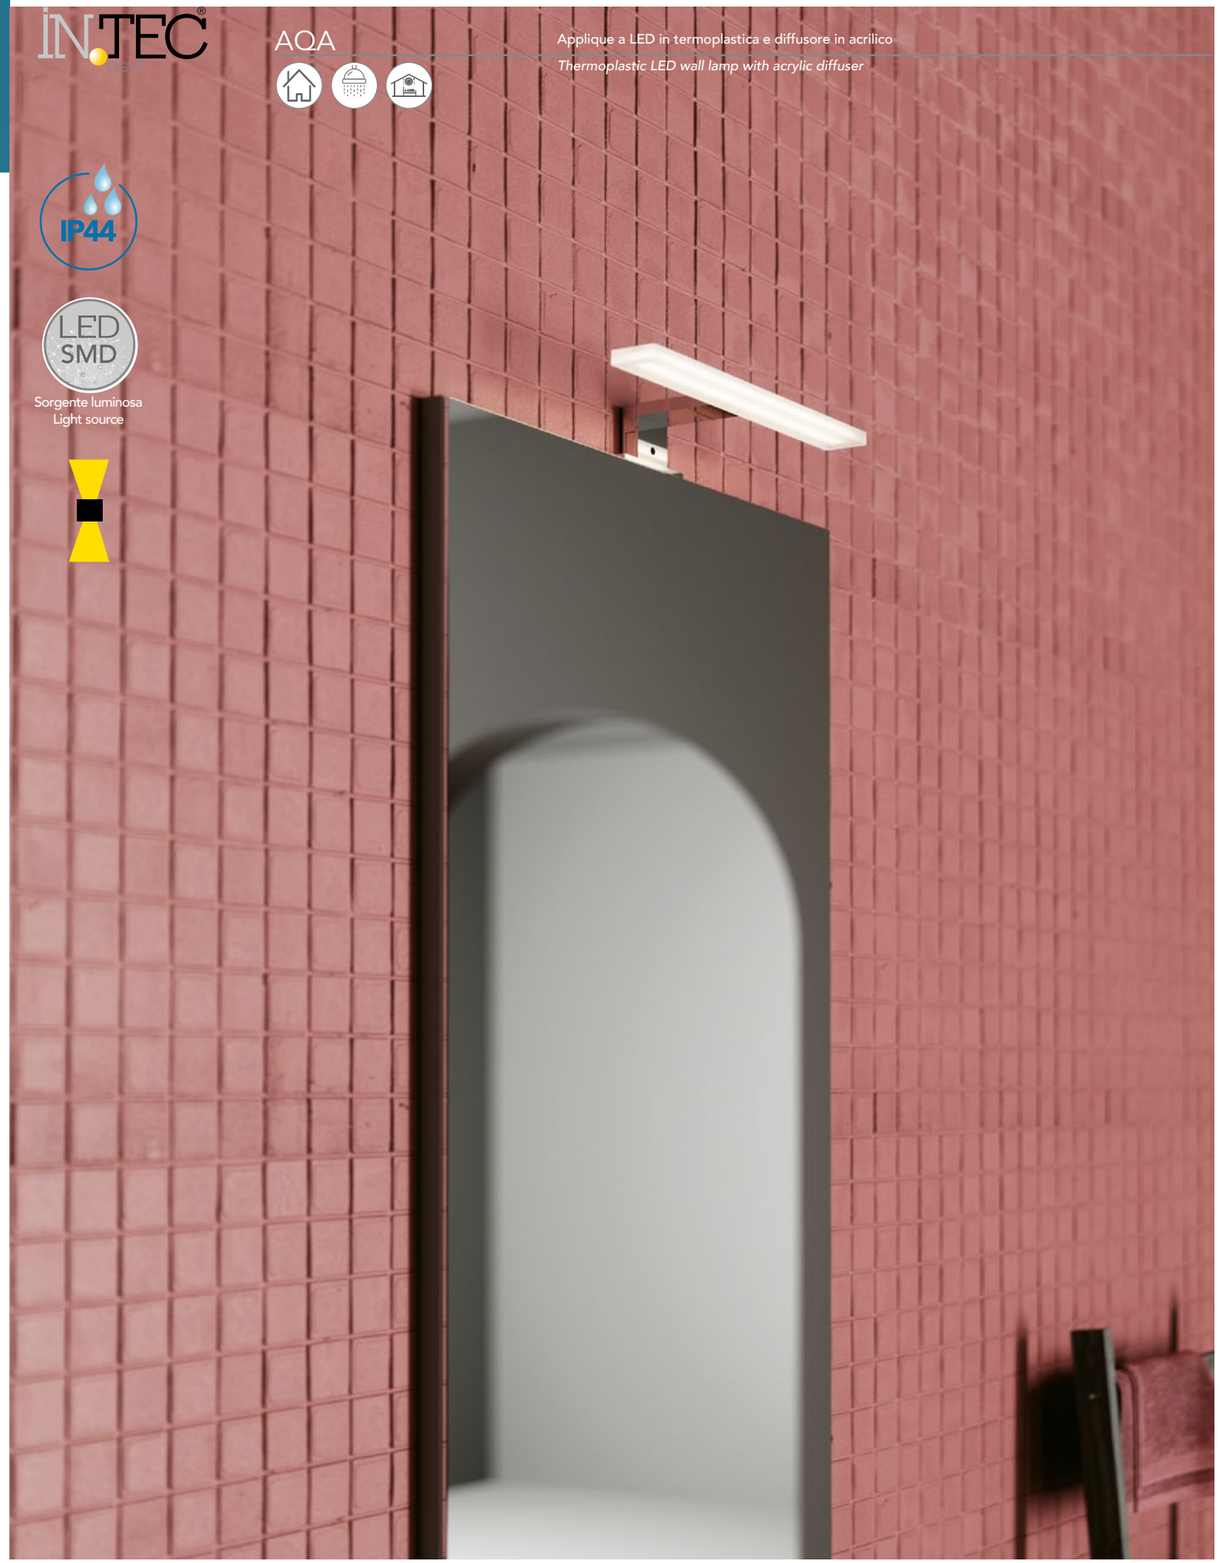

Materiale
Alluminio, diffusore in PC

Colore
Struttura cromata diffusore bianco

Sorgente luminosa
LED SMD 8W

Driver
Integrato

Temperatura colore
4000K

Flusso luminoso
600 Lm

UGR
<19

Angolo di luce
120°

CRI
>80

Material
Aluminium, PC diffuser

Colour
Chrome structure white diffuser

Light source
LED SMD 8W

Driver
Built-in driver

Color temperature
4000K

Luminous flux
600 Lm

UGR
<19

Beam angle
120°

CRI
>80

SPOT-B-AQA 8031414877027	**8W - 600 Lm**

Misure - Size
dimensioni in mm - size mm

Fissaggio su cornice
Frame fixing

Fissaggio su specchio
Mirror fixing

SCARAB

Applique a LED in alluminio e diffusore in acrilico, fissaggio su cornice

Aluminium LED wall lamp with acrylic diffuser, frame fixing

LED SMD

Sorgente luminosa
Light source

IP44

Driver
incluso

Sorgente luminosa
LED SMD 3W

Temperatura colore
4000K

Flusso luminoso
280 Lm

Angolo di luce **CRI**
120° >80

Driver
included

Light source
LED SMD 3W

Colour temperature
4000K

Luminous flux
280 Lm

Beam angle **CRI**
120° >80



SPOT-B-SCARAB **3W - 280 Lm**
8031440363440



Fissaggio su cornice
Frame fixing

Misure - Size
dimensioni in mm - size mm



WALLY

Applique a LED in alluminio e diffusore in acrilico, fissaggio su cornice e su specchio

Aluminium LED wall lamp with acrylic diffuser, frame and mirror fixing

LED SMD

Sorgente luminosa
Light source

IP44

Driver
integrato

Sorgente luminosa
LED SMD 8W

Temperatura colore
4000K

Flusso luminoso
650 Lm

Angolo di luce **CRI**
120° >80

Driver
built-in driver

Light source
LED SMD 8W

Colour temperature
4000K

Luminous flux
650 Lm

Beam angle **CRI**
120° >80



SPOT-B-WALLY **8W - 650 Lm**
8031440363471



Fissaggio su cornice
Frame fixing

Misure - Size
dimensioni in mm - size mm



ENDY

Applique da specchio in metallo finitura nickel con diffusore in vetro bianco satinato

Mirror lamp in metal nickel finish with satin white glass shade

E14

Attacco sorgente
Light source

IP23



SPOT-B-ENDY **1XE14 MAX 40W**
8031431941190

Lampadina non inclusa
Light bulb not included

Misure - Size
dimensioni in mm - size mm



JOY

Applique da specchio in metallo finitura nickel con diffusore in vetro bianco satinato

Mirror lamp in metal nickel finish with satin white glass shade

E14

Attacco sorgente
Light source

IP23



SPOT-B-JOY **2XE14 MAX 40W**
8031431961198

Lampadina non inclusa
Light bulb not included

Misure - Size
dimensioni in mm - size mm



ROBY

Applique da specchio in metallo cromato con diffusore in vetro bianco satinato

Mirror lamp in chrome metal with satin white glass shade



G9

Attacco sorgente
Light source

IP23



Fissaggio su specchio
Mirror fixing

SPOT-B-ROBY-CP
8031440312349

2XG9 MAX 28W

Lampadina non inclusa
Light bulb not included

fissaggio su specchio - *mirror fixing*

Misure - Size
dimensioni in mm - size mm





SPOT-B-ROBY
8031440312356

2XG9 MAX 28W

Lampadina non inclusa
Light bulb not included

Misure - Size
dimensioni in mm - size mm



DADO

Applique da specchio in metallo cromato con diffusore in vetro

Mirror lamp in chrome metal with glass shade

G9
Attacco sorgente
Light source

IP23

Fissaggio su specchio
Mirror fixing



SPOT-B-DADO **1XG9 MAX 28W**
8031431931191

Lampadina non inclusa
Light bulb not included

fissaggio su specchio - *mirror fixing*

Misure - Size
dimensioni in mm - size mm



GAIA

Applique da specchio in metallo finitura nickel

Mirror lamp in metal nickel finish

GU10
Attacco sorgente
Light source

IP23

Fissaggio su specchio
Mirror fixing



SPOT-B-GAIA **1XGU10 MAX 35W**
8031431951199

Lampadina non inclusa
Light bulb not included

Misure - Size
dimensioni in mm - size mm



F1

Applique metallo flessibile cromo con diffusore in vetro bianco satinato

Flexible metal wall lamp chrome with satin white glass diffuser

G9
Attacco sorgente
Light source

IP21



SPOT-F1 **1XG9 MAX 28W**
8031414076956

Lampadina non inclusa
Light bulb not included

Misure - Size
dimensioni in mm - size mm



Q1

Applique metallo cromo con diffusore in vetro satinato

Chrome metal wall lamp with satin glass diffuser

G9
Attacco sorgente
Light source

IP21



SPOT-Q1 **2XG9 MAX 28W**
8031414076932

Lampadina non inclusa
Light bulb not included

Misure - Size
dimensioni in mm - size mm



ZERO

Spot in metallo con punti luce orientabili, finitura nera o bianca matto

Metal adjustable spot light matt black or matt white finish





SPOT-ZERO-1 NER 8031414866915	1XGU10 MAX 35W	
SPOT-ZERO-1 BCO 8031414866878	1XGU10 MAX 35W	

Misure - size
dimensioni in mm - size mm





SPOT-ZERO-2 NER 8031414866922	2XGU10 MAX 35W	
SPOT-ZERO-2 BCO 8031414866885	2XGU10 MAX 35W	

Misure - size
dimensioni in mm - size mm





SPOT-ZERO-PL3 NER 8031414866908	3XGU10 MAX 35W	
SPOT-ZERO-PL3 BCO 8031414866861	3XGU10 MAX 35W	

Misure - size
dimensioni in mm - size mm





SPOT-ZERO-4 NER 8031414866892	4XGU10 MAX 35W	
SPOT-ZERO-4 BCO 8031414866854	4XGU10 MAX 35W	

Misure - size
dimensioni in mm - size mm



PUNTO

Spot in metallo con punti luce orientabili, finitura nera o bianca matto

Metal adjustable spot light matt black or matt white finish

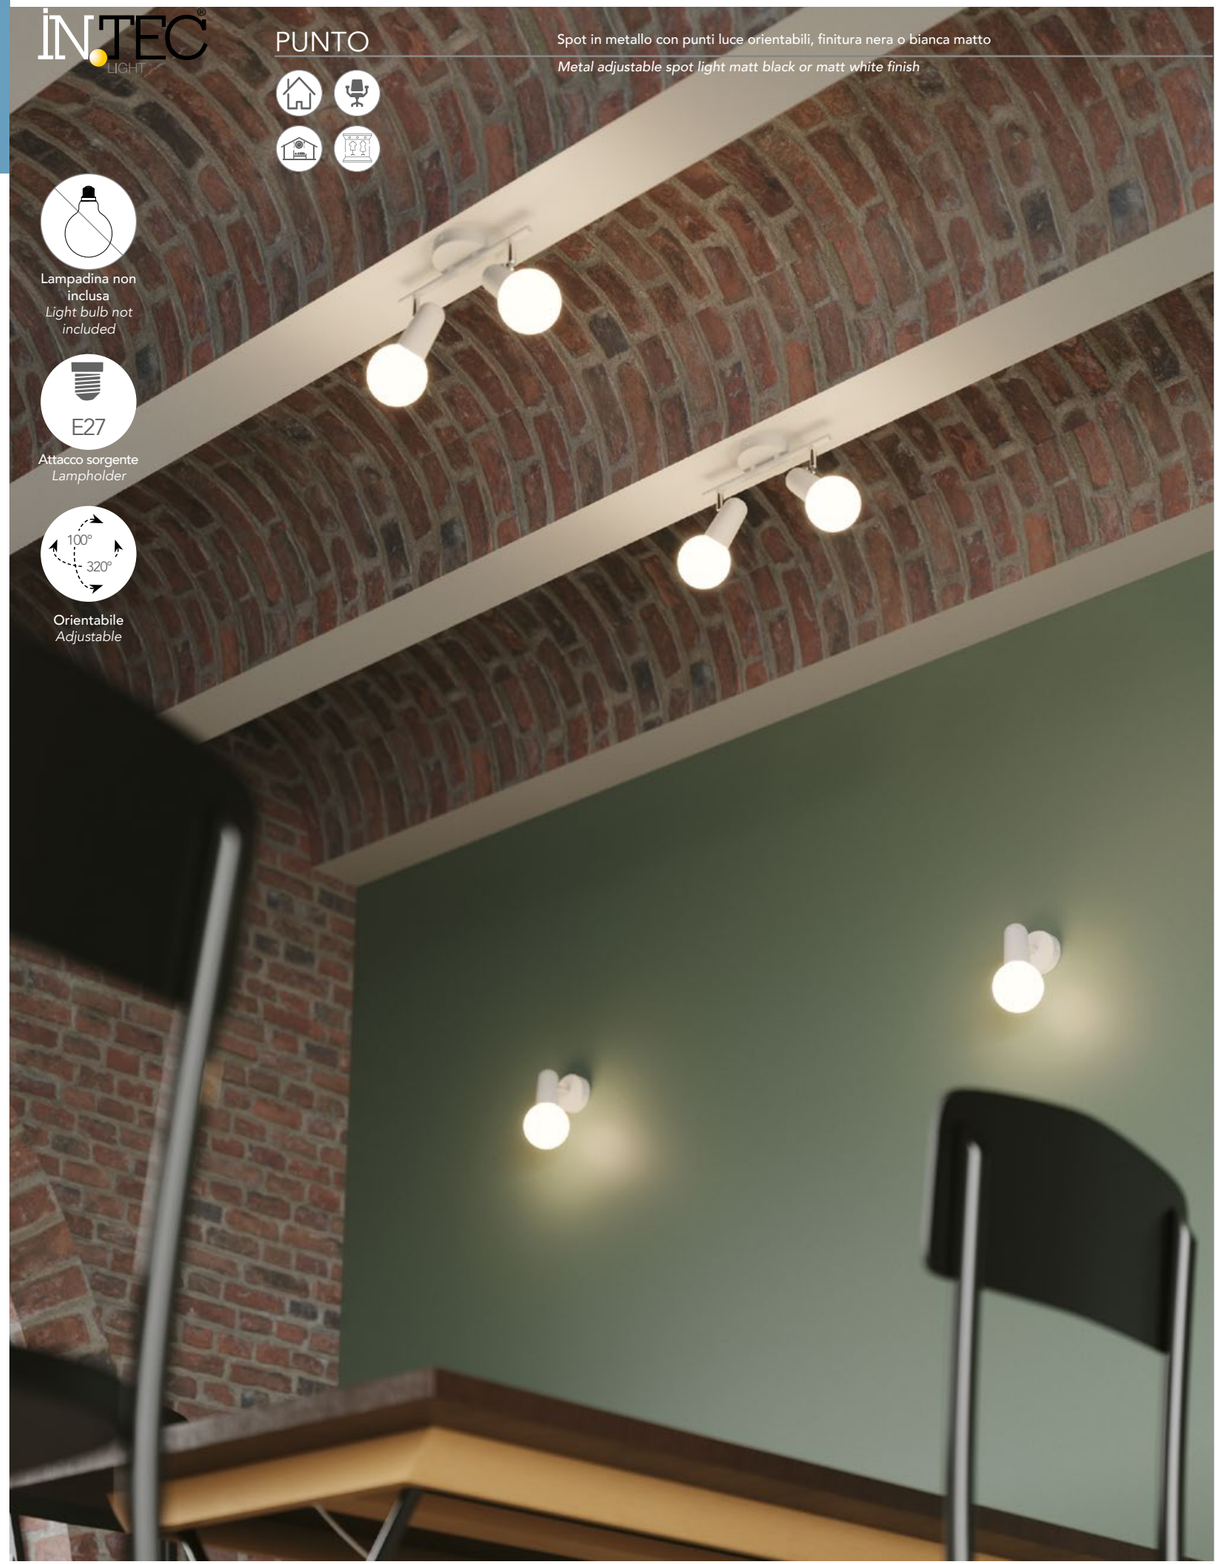

Lampadina non inclusa
Light bulb not included

E27
Attacco sorgente
Lampholder

100°
320°
Orientabile
Adjustable



SPOT-PUNTO-1 NER 8031414867011	1XE27 MAX 40W	
SPOT-PUNTO-1 BCO 8031414866830	1XE27 MAX 40W	

Misure - size
dimensioni in mm - size mm







SPOT-PUNTO-2 NER 8031414867028	2XE27 MAX 40W	
SPOT-PUNTO-2 BCO 8031414866847	2XE27 MAX 40W	

Misure - size
dimensioni in mm - size mm







SPOT-PUNTO-PL3 NER 8031414867004	3XE27 MAX 40W	
SPOT-PUNTO-PL3 BCO 8031414867042	3XE27 MAX 40W	

Misure - size
dimensioni in mm - size mm







SPOT-PUNTO-4 NER 8031414866991	4XE27 MAX 40W	
SPOT-PUNTO-4 BCO 8031414867035	4XE27 MAX 40W	

Misure - size
dimensioni in mm - size mm



TECHNO

Spot in metallo con punti luce orientabili, finitura nera o bianca matto

Metal adjustable spot light matt black or matt white finish



GU10

Attacco sorgente
Lampholder

100° 320°

Orientabile
Adjustable

Lampadina LED SMD inclusa
LED SMD light bulb included

Dimmer	Watt	CRI	Lm	Angolo	Kelvin	On/off
⊘	5W	80	400	100°	4000	>10.000



SPOT-TECHNO-1 NER 8031414864652	1XGU10 5W LED	■
SPOT-TECHNO-1 BCO 8031414864638	1XGU10 5W LED	■

Misure - size
dimensioni in mm - size mm





SPOT-TECHNO-2 NER 8031414864669	2XGU10 5W LED	■
SPOT-TECHNO-2 BCO 8031414864645	2XGU10 5W LED	■

Misure - size
dimensioni in mm - size mm





SPOT-TECHNO-3 NER 8031414864539	3XGU10 5W LED	■
SPOT-TECHNO-3 BCO 8031414864515	3XGU10 5W LED	■

Misure - size
dimensioni in mm - size mm





SPOT-TECHNO-PL4 NER 8031414864546	4XGU10 5W LED	■
SPOT-TECHNO-PL4 BCO 8031414864522	4XGU10 5W LED	■

Misure - size
dimensioni in mm - size mm



TECHNO

Spot in metallo con punti luce orientabili, finitura nickel spazzolato

Metal adjustable spot light brushed nickel finish

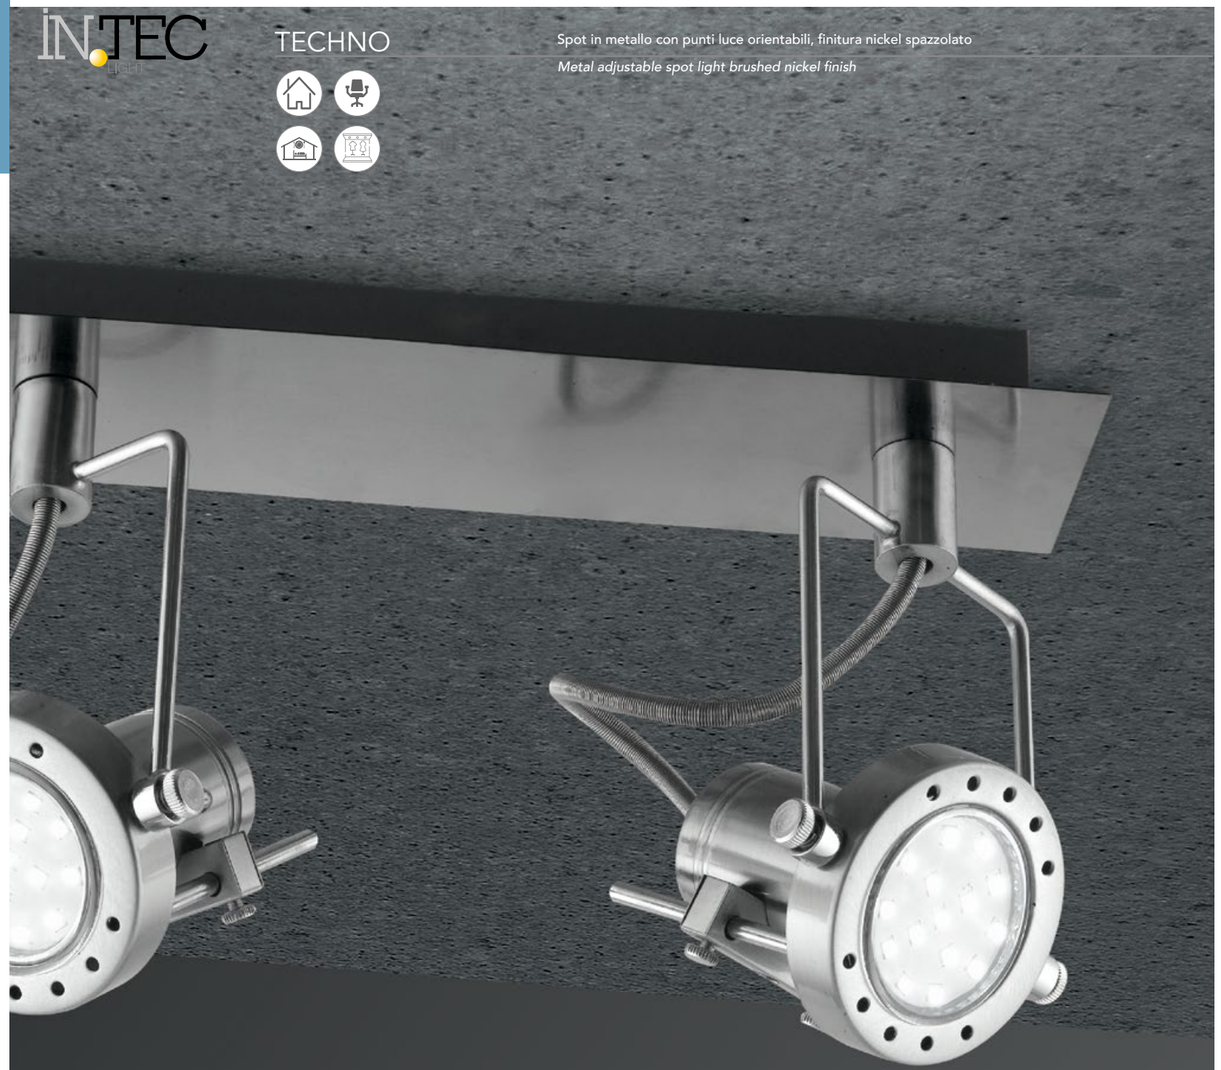

GU10

Attacco sorgente
Lampholder

100°
320°

Orientabile
Adjustable

Lampadina LED SMD inclusa
LED SMD light bulb included

Dimmer	Watt	CRI	Lm	Angolo	Kelvin	On/off
	5W	80	400	100°	2700	>10.000



SPOT-TECHNO-1
8031422881108
1XGU10 5W LED

Misure - size
dimensioni in mm - size mm





SPOT-TECHNO-2
8031422891107
2XGU10 5W LED

Misure - size
dimensioni in mm - size mm





SPOT-TECHNO-3
8031423041105
3XGU10 5W LED

Misure - size
dimensioni in mm - size mm





SPOT-TECHNO-PL4
8031423051104
4XGU10 5W LED

Misure - size
dimensioni in mm - size mm



SUNNY

Spot in metallo con punti luce orientabili, finitura nickel spazzolato

Metal adjustable spot light brushed nickel finish



GU10

Attacco sorgente
Lampholder

100° 320°

Orientabile
Adjustable

Lampadina LED SMD inclusa
LED SMD light bulb included

Dimmer	Watt	CRI	Lm	Angolo	Kelvin	On/off
	5W	80	400	100°	2700	>10.000



SPOT-SUNNY-1
8031431831187
1XGU10 5W LED

Misure - size
dimensioni in mm - size mm





SPOT-SUNNY-2
8031431841186
2XGU10 5W LED

Misure - size
dimensioni in mm - size mm





SPOT-SUNNY-S3
8031431861184
3XGU10 5W LED

Misure - size
dimensioni in mm - size mm





SPOT-SUNNY-4
8031431851185
4XGU10 5W LED

Misure - size
dimensioni in mm - size mm

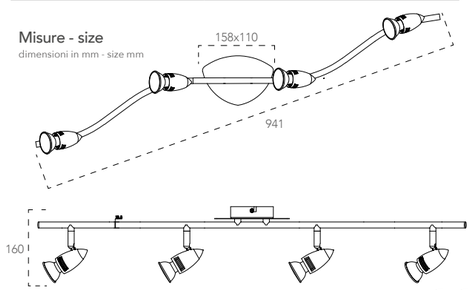

MIAMI

Spot in metallo con punti luce orientabili, finitura nickel spazzolato base con cornice in vetro trasparente

Metal adjustable spot light brushed nickel finish base with trasparent glass edge

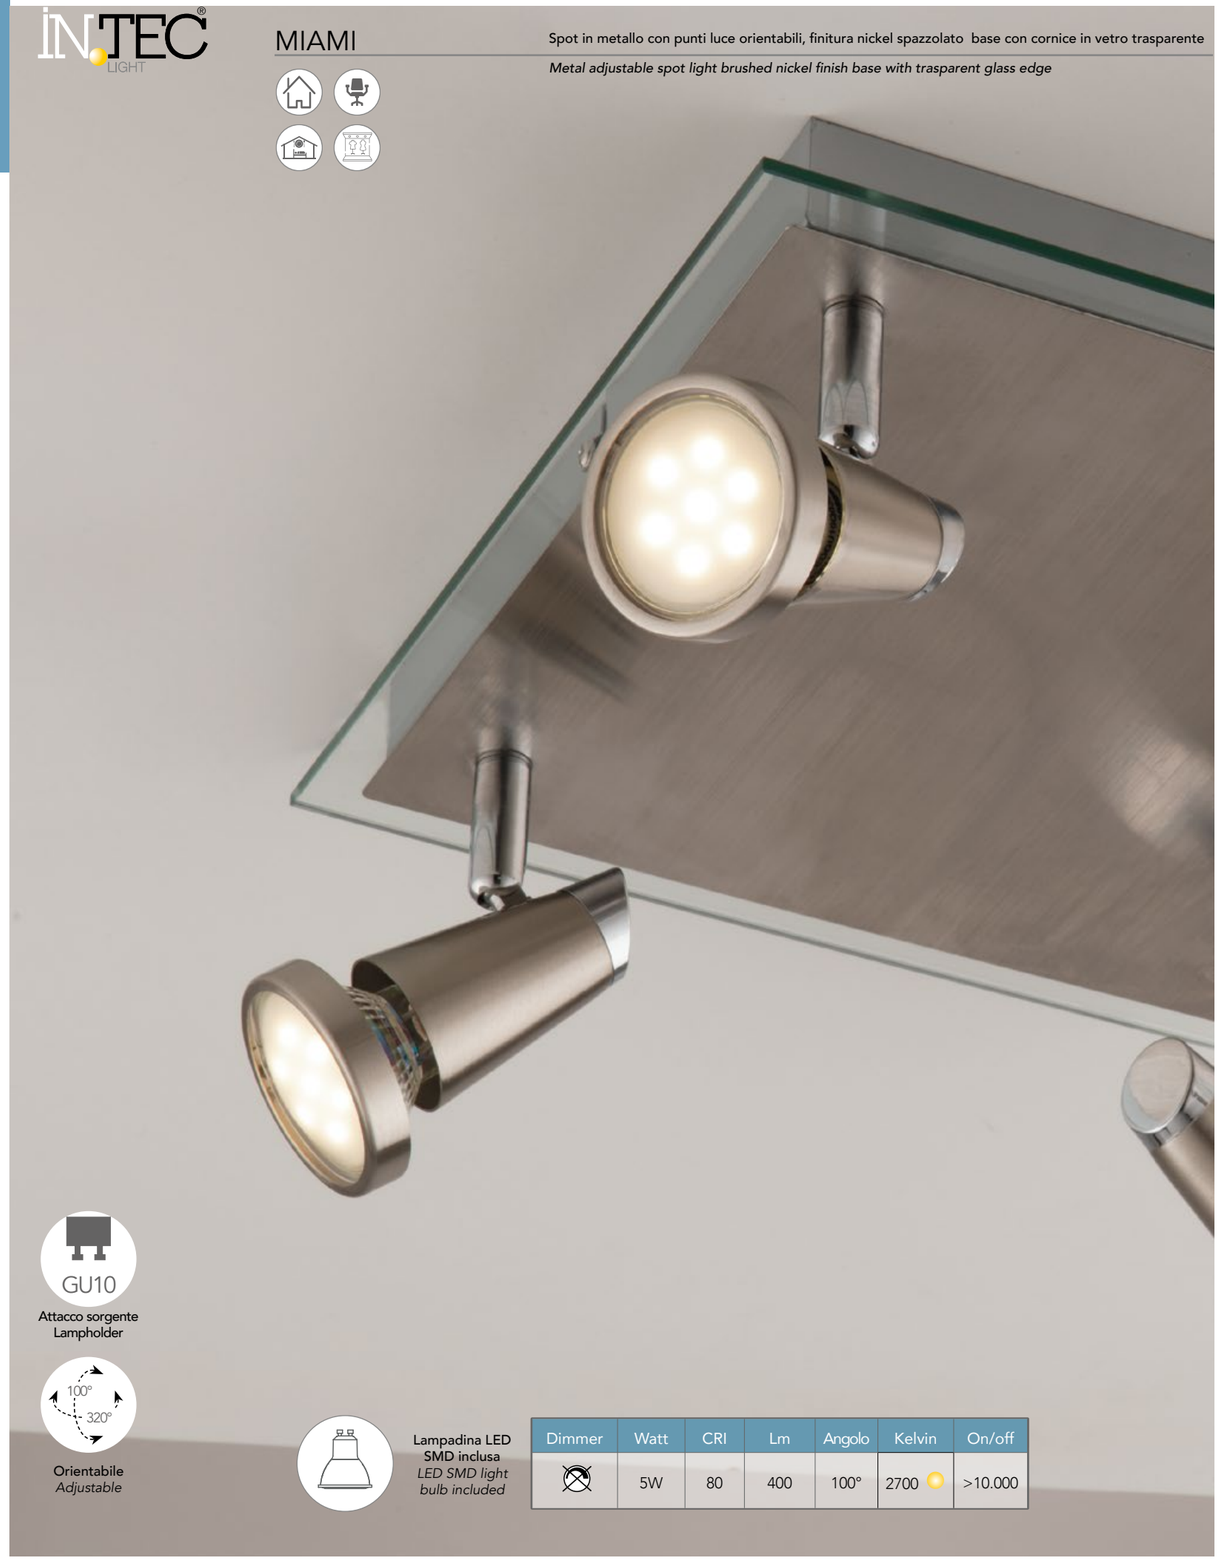

GU10

Attacco sorgente
Lampholder

100°
320°

Orientabile
Adjustable

Lampadina LED SMD inclusa
LED SMD light bulb included

Dimmer	Watt	CRI	Lm	Angolo	Kelvin	On/off
⊗	5W	80	400	100°	2700	>10.000



SPOT-MIAMI 01
8031414076772 — **1XGU10 5W LED**

Misure - size
dimensioni in mm - size mm





SPOT-MIAMI 02
8031414076796 — **2XGU10 5W LED**

Misure - size
dimensioni in mm - size mm





SPOT-MIAMI 03
8031414076802 — **3XGU10 5W LED**

Misure - size
dimensioni in mm - size mm





SPOT-MIAMI PL4
8031414076819 — **4XGU10 5W LED**

Misure - size
dimensioni in mm - size mm



COOPER

Spot in metallo con punti luce orientabili, finitura silver

Metal adjustable spot light silver finish



GU10

Attacco sorgente
Lampholder

100° 320°

Orientabile
Adjustable

Lampadina LED SMD inclusa
LED SMD light bulb included

Dimmer	Watt	CRI	Lm	Angolo	Kelvin	On/off
	5W	80	400	100°	2700	>10.000



SPOT-COOPER-1
8031440360913
1XGU10 5W LED

Misure - size
dimensioni in mm - size mm





SPOT-COOPER-2
8031440360920
2XGU10 5W LED

Misure - size
dimensioni in mm - size mm





SPOT-COOPER-3
8031440360937
3XGU10 5W LED

Misure - size
dimensioni in mm - size mm





SPOT-COOPER-4
8031440360944
4XGU10 5W LED

Misure - size
dimensioni in mm - size mm

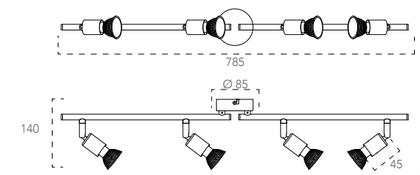

CADILLAC

Spot in metallo con punti luce orientabili, finitura cromo

Metal adjustable spot light chrome finish





Orientabile
Adjustable



Lampadina non inclusa
Light bulb not included



Attacco sorgente
Lampholder



Lampadina consigliata
suggested light bulb



SPOT-CADILLAC-1
8031438541256
1XE14 MAX 40W

Misure - size
dimensioni in mm - size mm





SPOT-CADILLAC-2
8031438551255
2XE14 MAX 40W

Misure - size
dimensioni in mm - size mm





SPOT-CADILLAC-3
8031414076918
3XE14 MAX 40W

Misure - size
dimensioni in mm - size mm





SPOT-CADILLAC-PL4
8031438521258
4XE14 MAX 40W

Misure - size
dimensioni in mm - size mm



MITO

Spot in metallo con punti luce orientabili, finitura nickel spazzolato, diffusori in vetro bianco

Metal adjustable spot light brushed nickel finish, white glass diffusers





Orientabile
Adjustable



Lampadina non inclusa
Light bulb not included



Attacco sorgente
Lampholder



SPOT-MITO-1
8031431791184
1XE14 MAX 40W

Misure - size
dimensioni in mm - size mm





SPOT-MITO-PL3
8031431801180
3XE14 MAX 40W

Misure - size
dimensioni in mm - size mm





SPOT-MITO-S3
8031431811189
3XE14 MAX 40W

Misure - size
dimensioni in mm - size mm





SPOT-MITO-S4
8031431821188
4XE14 MAX 40W

Misure - size
dimensioni in mm - size mm



CARRERA

Spot in metallo con punti luce orientabili, finitura bianca

Metal adjustable spot light white finish





Orientabile
Adjustable



Lampadina non inclusa
Light bulb not included



Attacco sorgente
Lampholder



SPOT-CARRERA-1 8031431701183 — **1XE27 MAX 40W**

Misure - size
dimensioni in mm - size mm





SPOT-CARRERA-C 8031431731180 — **1XE27 MAX 40W**

Misure - size
dimensioni in mm - size mm



Cavo - cable
150 cm



SPOT-CARRERA-2 8031431711182 — **2XE27 MAX 40W**

Misure - size
dimensioni in mm - size mm





SPOT-CARRERA-3 8031431721181 — **3XE27 MAX 40W**

Misure - size
dimensioni in mm - size mm





SPOT-CARRERA-PL3 8031431741189 — **3XE27 MAX 40W**

Misure - size
dimensioni in mm - size mm



DOUBLEU

Base portalampade in termoplastica bianca lucida

Glossy white thermoplastic lamp holder base

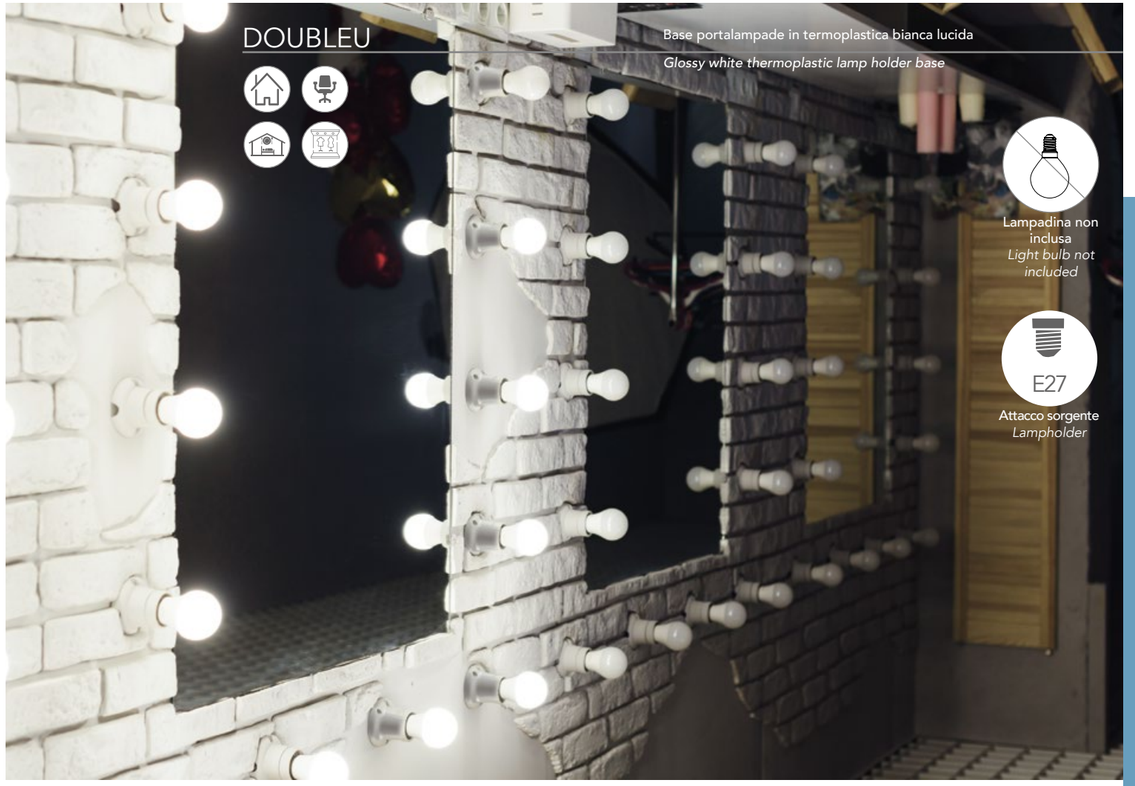

Lampadina non inclusa
Light bulb not included

Attacco sorgente
Lampholder



I-PORTALAMPADE-E27-WO 8031440364874 — **1XE27 MAX 42W**

Lampadina non inclusa
Light bulb not included

Misure - size
dimensioni in mm - size mm



I-PORTALAMPADE-E27-WS 8031440364867 — **1XE27 MAX 42W**

Lampadina non inclusa
Light bulb not included

Misure - size
dimensioni in mm - size mm




NEW YORK NY 20054
STORAGE
E. 8TH ST.
MANHAT
MADISON AV
TIMES SQU
UNITED STATES OF
HATTAN
ON AVENUE
S SQUARE
TATES OF AMERICA
NEW YORK
2
9



UNIX

Barra sotto pensile

Materiale
Struttura in alluminio, diffusore in pc riflettente

Colore
Nikel

Sorgente luminosa
LED SMD integrato

Driver
Incluso

Temperatura colore
4000K

Interruttore
Touch

Angolo di luce
120°

CRI
>80

Cabinet bar

Material
Alluminium body with PC reflective diffuser

Colour
Nikel

Light source
LED SMD built-in

Driver
Included

Colour temperature
4000K

Swicth
Touch

Beam angle
120°

CRI
>80



LEDBAR-UNIX-30
8031414866403
5,76W- 400 Lm

Misure - Size
dimensioni in mm - size mm



Accessori inclusi - *included accessories*



LEDBAR-UNIX-45
8031414864614
8,64W- 600 Lm

Misure - Size
dimensioni in mm - size mm



Accessori inclusi - *included accessories*

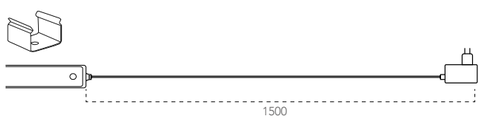

LEDBAR-UNIX-60
8031414864621
11,52W- 800 Lm

Misure - Size
dimensioni in mm - size mm



Accessori inclusi - *included accessories*



UNIX

LEDBAR-UNIX-90
8031414864492
17,28W- 1180 Lm

Misure - Size
dimensioni in mm - size mm



Accessori inclusi - *included accessories*



LEDBAR-UNIX-120
8031414864508
23,04W- 1560 Lm

Misure - Size
dimensioni in mm - size mm



Accessori inclusi - *included accessories*



LEDBAR-UNIX-150
8031414865185
28,8W- 1950 Lm

Misure - Size
dimensioni in mm - size mm



Accessori inclusi - *included accessories*



LEDBAR-UNIX-180
8031414865154
34,56W- 2350 Lm

Misure - Size
dimensioni in mm - size mm



Accessori inclusi - *included accessories*

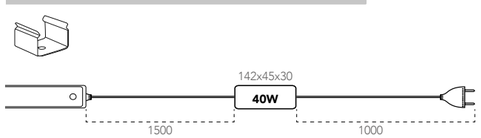

LEDBAR-UNIX-210
8031414865161
40,32W- 2730 Lm

Misure - Size
dimensioni in mm - size mm



Accessori inclusi - *included accessories*

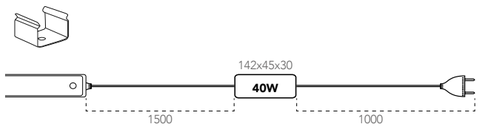

LEDBAR-UNIX-270
8031414865178
51,84W- 3510 Lm

Misure - Size
dimensioni in mm - size mm



Accessori inclusi - *included accessories*



LEDBAR-UNIX-300
8031414870738
57,6W- 3900 Lm

Misure - Size
dimensioni in mm - size mm



Accessori inclusi - *included accessories*

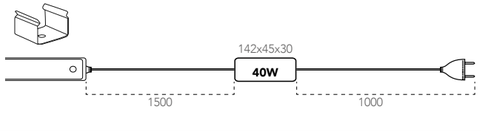

UNIX

Barra angolare sotto pensile

Angular cabinet bar



Materiale
struttura in alluminio, diffusore in pc riflettente

Material
Alluminium body with PC reflective diffuser

Colore
Nikel

Colour
Nikel

Sorgente luminosa
LED SMD integrato

Light source
LED SMD built-in

Driver
Incluso

Driver
Included

Temperatura colore
4000K

Colour temperature
4000K

Interruttore
Touch

Swicth
Touch

Angolo di luce
120°

Beam angle
120°

CRI
>80

CRI
>80

CE EMC

LEDBAR-UNIX-45 ANG
8031414864607 — **8,64W- 600 Lm**

Misure - Size
dimensioni in mm - size mm



Accessori inclusi - *included accessories*

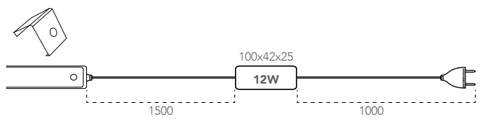

LEDBAR-UNIX-60 ANG
8031414864478 — **11,52W- 800 Lm**

Misure - Size
dimensioni in mm - size mm



Accessori inclusi - *included accessories*

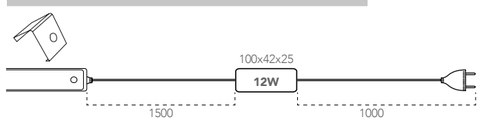

LEDBAR-UNIX-90 ANG
8031414864485 — **17,28W- 1180 Lm**

Misure - Size
dimensioni in mm - size mm



Accessori inclusi - *included accessories*

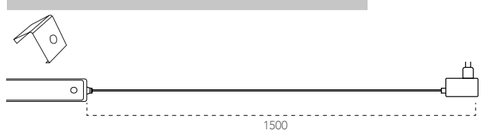

LEDBAR-UNIX-120 ANG
8031414864577 — **23,04W- 1560 Lm**

Misure - Size
dimensioni in mm - size mm



Accessori inclusi - *included accessories*



LEDBAR-UNIX-150 ANG
8031414866373 — **28,8W- 1950 Lm**

Misure - Size
dimensioni in mm - size mm



Accessori inclusi - *included accessories*

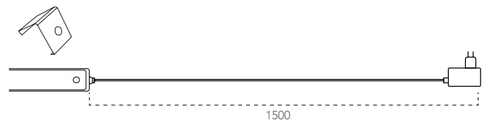

LEDBAR-UNIX-180 ANG
8031414866380 — **34,56W- 2350 Lm**

Misure - Size
dimensioni in mm - size mm



Accessori inclusi - *included accessories*



LEDBAR-UNIX-210 ANG
8031414866359 — **40,32W- 2730 Lm**

Misure - Size
dimensioni in mm - size mm



Accessori inclusi - *included accessories*

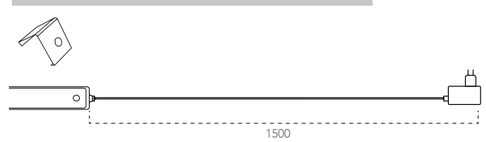

LEDBAR-UNIX-240 ANG
8031414866366 — **46,08W- 3120 Lm**

Misure - Size
dimensioni in mm - size mm



Accessori inclusi - *included accessories*

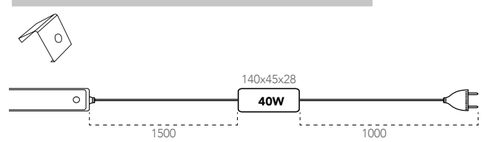

LEDBAR-UNIX-300 ANG
8031414866342 — **57,6W- 3900 Lm**

Misure - Size
dimensioni in mm - size mm



Accessori inclusi - *included accessories*

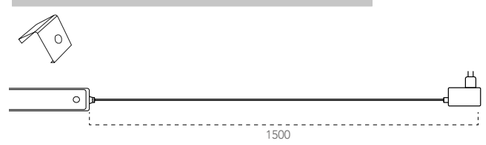



T8

Barra a LED integrato per sotto pensile

Cabinet built-in LED bar

T8



Materiale
Struttura in alluminio, diffusore in pc

Colore
Bianco

Sorgente luminosa
LED SMD integrato

Driver
Integrato

Temperatura colore
4000K

Angolo di luce
120°

CRI
>80

Material
Aluminum body with PC diffuser

Colour
White

Light source
LED SMD built-in

Driver
Built-in driver

Color temperature
4000K

Beam angle
120°

CRI
>80

LEDBAR-T8-60 8031414875382	**9W- 850 Lm**	Accessori inclusi *included accessories*	Misure - Size dimensioni in mm - size mm 600 28x39
LEDBAR-T8-120 8031414875399	**18W- 1700 Lm**	Accessori inclusi *included accessories*	Misure - Size dimensioni in mm - size mm 1200 28x39
LEDBAR-T8-150 8031414875405	**24W- 2300 Lm**	Accessori inclusi *included accessories*	Misure - Size dimensioni in mm - size mm 1500 28x39



BATTEN

Barra ultra sottile a LED integrato per sotto pensile

Ultra slim cabinet built-in LED bar

BATTEN



Materiale
Struttura in PC bianco, diffusore in pc bianco

Colore
Bianco

Sorgente luminosa
LED SMD integrato

Driver
Integrato

Temperatura colore
4000K

Angolo di luce
120°

CRI
>80

Material
PC white body with PC white diffuser

Colour
White

Light source
LED SMD built-in

Driver
Built-in driver

Color temperature
4000K

Beam angle
120°

CRI
>80

LED-BATTEN-30 8031440357722	**9W- 810 Lm**	Accessori inclusi *included accessories*	Misure - Size dimensioni in mm - size mm	300 75x23
LED-BATTEN-60 8031440357739	**18W- 1620 Lm**	Accessori inclusi *included accessories*	Misure - Size dimensioni in mm - size mm	600 75x23
LED-BATTEN-120 8031440357746	**36W- 3240 Lm**	Accessori inclusi *included accessories*	Misure - Size dimensioni in mm - size mm	1200 75x23
LED-BATTEN-150 8031440357753	**48W- 4320 Lm**	Accessori inclusi *included accessories*	Misure - Size dimensioni in mm - size mm	1500 75x23

HABILIS

Barra a LED integrato per sotto pensile

Cabinet built-in LED bar





Materiale
Struttura in alluminio diffusore in pc

Colore
Bianco

Sorgente luminosa
LED SMD integrato

Driver
integrato

Temperatura colore
4000K

Interruttore
incluso

Angolo di luce
105°

CRI
>80

Material
Aluminum body with PC diffuser

Colour
White

Light source
Built-in LED SMD

Driver
Built-in

Colour temperature
4000K

Swicth
included

Beam angle
105°

CRI
>80



LED-HABILIS-AP
8031414881604
15W- 1550 Lm

2 plug max 16A

2.4A usb

Misure - Size
dimensioni in mm - size mm



T5

Barra sotto pensile con interruttore

Materiale
Struttura in PC diffusore in pc

Colore
Bianco

Sorgente luminosa
LED SMD integrato

Driver
Integrato

Temperatura colore
4000K

Interruttore
incluso

Angolo di luce
135°

CRI
>80

Cabinet bar with switch

Material
PC white body with PC white diffuser

Colour
White

Light source
Built-in LED SMD

Driver
Built-in driver

Color temperature
4000K

Swicth
included

Beam angle
135°

CRI
>80









LEDBAR-T5-30
8031440354691
5W- 500 Lm

Misure - Size
dimensioni in mm - size mm



Accessori inclusi
included accessories



LEDBAR-T5-60
8031440354707
8W- 800 Lm

Misure - Size
dimensioni in mm - size mm



Accessori inclusi
included accessories



LEDBAR-T5-90
8031440354677
12W- 1200 Lm

Misure - Size
dimensioni in mm - size mm



Accessori inclusi
included accessories



LEDBAR-T5-120
8031440354684
15W- 1500 Lm

Misure - Size
dimensioni in mm - size mm



Accessori inclusi
included accessories





Accessori inclusi
included accessories



LEDBAR-T5-150
8031414871742
18W- 1800 Lm

Misure - Size
dimensioni in mm - size mm



MOVIE

Barra sotto pensile orientabile

Materiale
Struttura in PC diffusore in pc

Colore
Bianco

Sorgente luminosa
LED SMD integrato

Driver
integrato

Temperatura colore
4000K

Interruttore
incluso

Angolo di luce
120°

CRI
>80

Adjustable cabinet bar

Material
PC body with PC diffuser

Colour
White

Light source
Built-in LED SMD

Driver
Built-in

Colour temperature
4000K

Swicth
included

Beam angle
120°

CRI
>80



AC220V~ 240V 50Hz
MULTI-CONNECT



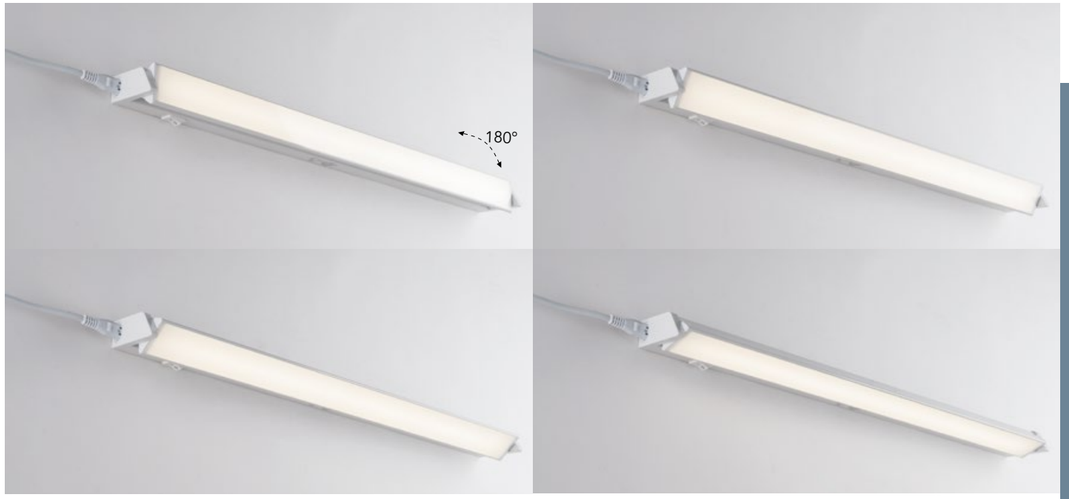

LEDBAR-MOVIE-S
8031414866427
5W- 425 Lm

Misure - Size
dimensioni in mm - size mm



Accessori inclusi
included accessories



LEDBAR-MOVIE
8031440355100
10W- 850 Lm

Misure - Size
dimensioni in mm - size mm



Accessori inclusi
included accessories



LEDBAR-MOVIE-L
8031414866441
15W- 1275 Lm

Misure - Size
dimensioni in mm - size mm



Accessori inclusi
included accessories



LINE

Barra incasso sotto pensile con sensore di movimento

Materiale
Struttura in alluminio, diffusore in pc riflettente

Sorgente luminosa
LED SMD integrato 12V DC

Driver
Non incluso DC12V

Temperatura colore
4000K

Interruttore
Sensore di movimento

Angolo di luce
120°

CRI
>80

Personalizza il tuo articolo
Personalize your item

Recessed cabinet bar with motion sensor

Material
Alluminium body with PC reflective diffuser

Light source
LED SMD built-in 12V DC

Driver
Not included DC12V

Colour temperature
4000K

Swicth
Motion sensor

Beam angle
120°

CRI
>80



Accessori inclusi
included accessories

sensore di movimento regolabile
adjustable motion sensor



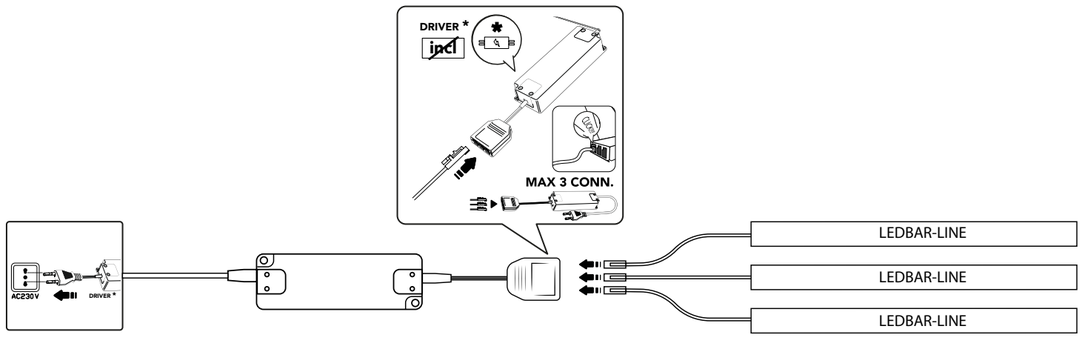



LEDBAR-LINE-91
8031414874286
9,5W- 500 Lm

Accessori inclusi
included accessories

Foro - cut out
dimensioni in mm - size mm



Misure - Size
dimensioni in mm - size mm





LEDBAR-LINE-127
8031414874279
13,5W- 710 Lm

Accessori inclusi
included accessories

Foro - cut out
dimensioni in mm - size mm



Misure - Size
dimensioni in mm - size mm





LEDBAR-LINE-199
8031414874309
19,5W- 1030 Lm

Accessori inclusi
included accessories

Foro - cut out
dimensioni in mm - size mm



Misure - Size
dimensioni in mm - size mm





LEDBAR-LINE-223
8031414874293
21W- 1120 Lm

Accessori inclusi
included accessories

Foro - cut out
dimensioni in mm - size mm



Misure - Size
dimensioni in mm - size mm





LED-DRIVER-LINE-33
8031414874262

Driver 33W 200-240V Dc12v
2.75A Cavo 1M 2X0.75mm
Con Spina
Driver 33W 200-240V Dc12v
2.75A Cable 1M 2X0.75mm
with plug

Driver con connettore multientrata max 3 barre
MAX 33W
Driver with multi connector
max 3 bar
MAX 33W

Misure - Size
140X47X25
dimensioni in mm - size mm



LED-DRIVER-LINE-54
8031414874255

Driver 54W 200-240V Dc12v
4.5A Cavo 1M 2X0.75mm
Con Spina
Driver 54W 200-240V Dc12v
4.5A Cable 1M 2X0.75mm
with plug

Driver con connettore multientrata max 3 barre
MAX 54W
Driver with multi connector
max 3 bar
MAX 54W

Misure - Size
152x59x32
dimensioni in mm - size mm



ZAK

Lampada LED con sensore IR

IR sensor LED lamp

Materiale
Struttura in alluminio, diffusore in pc riflettente

Material
Alluminium body with PC reflective diffuser

Colore
silver

Colour
silver

Sorgente luminosa
LED SMD

Light source
LED SMD

Batteria inclusa
3.7V 1600mAh

Battery included
3.7V 1600mAh

Temperatura colore
3000K

Color temperature
3000K

Angolo di luce
110°

Beam angle
110°

CRI
>80

CRI
>80

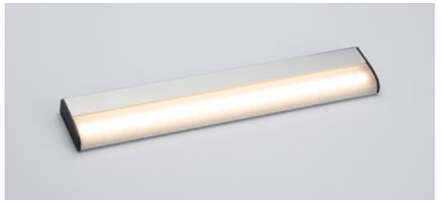

LEDBAT-ZAK-IR26
8031414882281
1,20W - 100 Lm

Misure - Size
dimensioni in mm - size mm





LEDBAT-ZAK-IR35
8031414882298
1,70W - 150 Lm

Misure - Size
dimensioni in mm - size mm



Accessori inclusi
Included accessories

sensore IR 2 funzioni
IR sensor 2 function

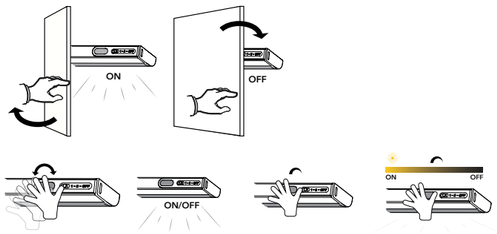

batteria ricaricabile
rechargeable battery

2,5 hours

cavo incluso
included cable
DC5V 0,4A
Micro USB

AURIKA

Lampada LED con sensore IR

IR sensor LED lamp







Materiale
Policarbonato
Colore
bianco
Sorgente luminosa
LED SMD 1,25W
Batteria
inclusa DC 3,7V 2.2A
Temperatura colore
3000K

Material
Polycarbonate
Colour
white
Light source
LED SMD 1,25W
Battery
included DC 3,7V 2.2A
Color temperature
3000K

LEDBAT-AURIKA
8031414882250
1,25W - 100 Lm

Misure - Size
dimensioni in mm - size mm



sensore IR
IR sensor



batteria ricaricabile
rechargeable battery



cavo incluso
included cable
DC5V 0,4A
Micro USB

BLAM

Lampada LED con sensore IR

IR sensor LED lamp







Materiale
Alluminio
Colore
struttura silver diffusore bianco
Sorgente luminosa
LED SMD 1,7W
Batteria
inclusa DC 3,7V 2.2A
Temperatura colore
3000K

Material
Aluminum
Colour
silver structure white diffuser
Light source
LED SMD 1,7W
Battery
included DC 3,7V 2.2A
Color temperature
3000K

LEDBAT-BLAM-IR38
8031414882267
1,7W - 150 Lm

Misure - Size
dimensioni in mm - size mm



sensore IR
IR sensor



batteria ricaricabile
rechargeable battery



cavo incluso
included cable
DC5V 0,4A
Micro USB

GTO

Lampada con sensore di movimento ricaricabile

Rechargeable lamp with motion sensor







Materiale
Policarbonato
Colore
bianco
Sorgente luminosa
LED SMD 0,90W
Batteria
inclusa DC 3,7V 1A
Temperatura colore
3000K

Material
Polycarbonate
Colour
white
Light source
LED SMD 0,90W
Battery
included DC 3,7V 1A
Color temperature
3000K

LEDBAT-GTO
8031414882274
1W - 105 Lm

Misure - Size
dimensioni in mm - size mm



sensore di movimento
motion sensor



batteria ricaricabile
rechargeable battery



cavo incluso
included cable
DC5V 0,4A
Micro USB



CLOSET

Lampada con sensore di movimento ricaricabile

Materiale
Policarbonato
Colore
silver
Sorgente luminosa
LED SMD 1W
Batteria
inclusa DC 5V 1A
Temperatura colore
4000K

Rechargeable lamp with motion sensor

Material
Polycarbonate
Colour
silver
Light source
LED SMD 1W
Battery
included DC 5V 1A
Colour temperature
4000K





sensore di movimento
motion sensor



LED-CLOSET-10
8031414873012
1W - 105 Lm

Misure - Size
dimensioni in mm - size mm



sensore di movimento
motion sensor



batteria ricaricabile
rechargeable battery





Micro USB charging wires
DC 5V
cavo non incluso
not included cable

SHELF

Lampada con sensore di movimento ricaricabile

Materiale
Policarbonato
Colore
struttura silver diffusore bianco
Sorgente luminosa
LED SMD 1W
Batteria
inclusa DC 5V 1A
Temperatura colore
4000K

Rechargeable lamp with motion sensor

Material
Polycarbonate
Colour
silver structure white diffuser
Light source
LED SMD 1W
Battery
included DC 5V 1A
Colour temperature
4000K





sensore di movimento
motion sensor



LED-SHELF-R7
8031414873029
1W - 110 Lm

Misure - Size
dimensioni in mm - size mm



sensore di movimento
motion sensor



batteria ricaricabile
rechargeable battery





Micro USB charging wires
DC 5V
cavo non incluso
not included cable

TRIGGER

Kit 2pz. copri cerniera per anta

Materiale
Policarbonato di colore grigio
Colore
silver
Sorgente luminosa
LED SMD 0,2W DC12V
Batteria
2x23A non incluse
Temperatura colore
4000K

Kit 2pcs hinge lamp

Material
Polycarbonate in gray colour
Colour
silver
Light source
LED SMD 0,2W DC12V
Battery
2x23A not included
Colour temperature
4000K





LED-TRIGGER
8031414873005
KIT 2PZ



compatibile per cerniera a scatto collo "0"
Compatibe with "0" neck snap hinge

Misure - Size
dimensioni in mm - size mm



SONAR

Barra sotto pensile con sensore di movimento

Materiale
Policarbonato
Colore
silver
Sorgente luminosa
LED SMD 6X0,45W
Batteria
3x1,5V AAA non inclusa
Temperatura colore
4500K
Angolo di luce
45°
CRI
>80

Cabinet bar with motion sensor

Material
Polycarbonate
Colour
silver
Light source
LED SMD 6X0,45W
Battery
3x1,5V AAA not included
Colour temperature
4500K
Beam angle
45°
Driver
>80



LED-SONAR-AP
8031440021272
6X0,45W - 35 Lm

Misure - Size
dimensioni in mm - size mm



sensore di movimento regolabile
adjustable motion sensor



YOUNG

Barra sotto pensile con interruttore ottico

Materiale
Alluminio
Colore
silver
Sorgente luminosa
LED SMD 4,9W
Driver
Incluso
Temperatura colore
4000K
Flusso luminoso
320 Lm
Angolo di luce
120°
CRI
>80

Cabinet bar with optical switch

Material
aluminium
Colour
silver
Light source
LED SMD 4,9W
Driver
Included
Colour temperature
4000K
Luminous flux
320 Lm
Beam angle
120°
CRI
>80





interruttore ottico
optical switch

LED-YOUNG-5W
8031440071277
4,9W- 320 Lm

Misure - Size
dimensioni in mm - size mm



Accessori inclusi
Included accessories

x1 Alimentatore
x1 Power supply
con cavo 2000 mm
with 2000mm cable included

VISTA

Lampada LED con sensore di movimento

Materiale
Policarbonato
Colore
bianco - silver
Sorgente luminosa
LED SMD
Batteria inclusa
3x1,5V AAA
Temperatura colore
4500K - 6000K

Motion sensor LED lamp

Material
Polycarbonate
Colour
silver - white
Light source
LED SMD
Battery included
3x1,5V AAA
Color temperature
4500K - 6000K





Fascio di luce orientabile
Adjustable beam angle



LED-VISTA-M-AP
8031440031271
3X0,075W - 18 Lm

Misure - Size
dimensioni in mm - size mm



Accessori inclusi
Included accessories

sensore di movimento
motion sensor





LED-VISTA-AP
8031439991272
3X0,075W - 20 Lm

Misure - Size
dimensioni in mm - size mm



Accessori inclusi
Included accessories

sensore di movimento
motion sensor



Profili in alluminio per fissaggio nel cartongesso

Alumunm fixing profile in plasteboard





I-PROFILO-GORIZIA-XL
8031414871094

Profilo 2m a rapido fissaggio nel cartongesso diffusore opale e tappi inclusi
2m quick fixing profile in plasteboard with opal diffuser and caps included





I-PROFILO-GORIZIA
8031414871124

Profilo 2m a rapido fissaggio nel cartongesso diffusore opale e tappi inclusi
2m quick fixing profile in plasteboard with opal diffuser and caps included





I-PROFILO-GORIZIA-S
8031414876587

Profilo 2m a rapido fissaggio nel cartongesso diffusore opale e tappi inclusi
2m quick fixing profile in plasteboard with opal diffuser and caps included





I-PROFILO-GORIZIA-S NER
8031414876624

Profilo 2m di colore nero matto a rapido fissaggio nel cartongesso diffusore nero traslucido e tappi inclusi
2m quick fixing profile in plasteboard Matt black with translucent black diffuser and caps included





I-PROFILO-RIDGE-2
8031414876570

Profilo 2m angolare a rapido fissaggio nel cartongesso diffusore opale tappi e staffe inclusi
2m quick fixing angular profile in plasteboard with opal diffuser and caps included





I-PROFILO-TRIM-2
8031414876563

Profilo 2m a veletta bianco diffusore opale incluso
2m profile in white colour plasterboard veil with opal diffuser included





PROFILI

Profili in alluminio calpestabili

Walkable profile in aluminum



	I-PROFILO-DRIVEWAY-2 8031414881949	Profilo in alluminio silver carrabile driveway 2m incluso tappi e staffe *Walkable 2m profile with opal diffuser included* *(max 2000Kg)*	
	I-PROFILO-DRIVEWAY-CAP 8031414881956	Tappi per profilo in alluminio silver carrabile driveway silver *2 pcs kit caps for DRIVEWAY profile*	
	I-PROFILO-STEPWAY 8031414876594	Profilo 2m per gradini diffusore opale tappi inclusi *2m profile for step with opal diffuser included*	
	I-PROFILO-STEPWAY-CAP 8031414877782	Kit 2 pz tappi di chiusura per profilo **STEPWAY** *2 pcs kit caps for STEPWAY profile*	



	I-PROFILO-BERLINO 8031434611212	Profilo 1m a rapido fissaggio nel cartongesso diffusore opale tappi e staffe inclusi *1m quick fixing profile in plasteboard with opal diffuser caps and bracket included*	
	I-PROFILO-BERLINO-2 8031440359405	Profilo 2m a rapido fissaggio nel cartongesso diffusore opale tappi e staffe inclusi *2m quick fixing profile in plasteboard with opal diffuser caps and bracket included*	
	I-PROFILO-BERLINO-2 BCO 8031414871070	Profilo BIANCO 2m a rapido fissaggio nel cartongesso diffusore opale tappi e staffe inclusi *2m quick fixing profile in plasteboard WHITE colour with opal diffuser caps and bracket included*	
	I-PROFILO-BERLINO-2 NER 8031414876617	Profilo 2m di colore NERO matto a rapido fissaggio nel cartongesso diffusore nero tappi e staffe inclusi *2m quick fixing profile in plasteboard Matt black with black diffuser caps and bracket included*	
	I-PROF-BERLINO2-DIFF 8031440357647	Diffusore trasparente per profili Berlino *PC trasparent diffuser for Berlino*	
	I-PROFILO-ROMA 8031434601213	Profilo 1m a rapido fissaggio nel cartongesso o superfici esterne diffusore opaletappi e staffe inclusi *1m quick fixing profile in plasteboard or surface mount with opal diffuser caps and bracket included*	
	I-PROFILO-ROMA-2 8031440359399	Profilo 2m a rapido fissaggio nel cartongesso o superfici esterne diffusore opale tappi e staffe inclusi *2m quick fixing profile in plasteboard or surface mount with opal diffuser caps and bracket included*	
	I-PROFILO-ROMA-2 NER 8031414876600	Profilo 2m di colore nero matto a rapido fissaggio nel cartongesso o superfici esterne diffusore nero translucido nero tappi e staffe inclusi *2m quick fixing profile in plasteboard or surface mount Matt black with translucent black diffuser caps and bracket included*	
	I-PROF-ROMA2-DIFF 8031440357630	Diffusore trasparente profilo Roma alluminio *PC trasparent diffuser for Rome.*	







I-PROFILO-NEWYORK
8031434581218

Profilo angolare 1m a rapido fissaggio nel cartongesso diffusore opale tappi e staffe inclusi
1m quick fixing angular profile in plasteboard with opal diffuser caps and bracket included





I-PROFILO-NEWYORK-2
8031440359382

Profilo angolare 2m a rapido fissaggio nel cartongesso diffusore opale tappi e staffe inclusi
2m quick fixing angular profile in plasteboard with opal diffuser caps and bracket included



I-PROF-NEWYORK2-DIFF
8031440357623

Diffusore trasparente profilo New York angolare alluminio
PC trasparent diffuser for New York.





I-PROFILO-DORIK-2
8031414876556

Profilo 2m con fissaggio a parete diffusore angolare opale tappi e staffe inclusi
2m profile surface mount with opal diffuser and caps included



I-PROFILO-DORIK-CAP
8031414877768

Kit 2 pz tappi di chiusura per profilo DORIK
2 pcs kit caps for DORIK profile



I-PROFILO-IONIK-2
8031414876549

Profilo 2m con fissaggio a parete diffusore angolare opale, tappi e staffe inclusi
2m profile surface mount with opal diffuser and caps included



I-PROFILO-IONIK-CAP
8031414877775

Kit 2 pz tappi di chiusura per profilo IONIK
2 pcs kit caps for IONIK profile



I-PROFILO-DORIK-16-2
8031414882205

Profilo in alluminio silver angolare dorik 2m incluso tappi e staffe
2m profile surface mount with opal diffuser and caps included



I-PROFILO-DORIK-16-CAP
8031414882212

Tappi per profilo in alluminio angolare dorik 16x16mm silver
2 pcs kit caps for DORIK profile



I-PROFILO-IONIK-16-2
8031414882229

Profilo in alluminio silver angolare ionik 2m incluso tappi e staffe
2m profile surface mount with opal diffuser and caps included



I-PROFILO-IONIK-16-CAP
8031414882236

Tappi per profilo in alluminio angolare ionik 16x16mm silver
2 pcs kit caps for IONIK profile



I-PROFILO-LOOP-2
8031414881840

Profilo 2m in alluminio silver diffusore emissione a 180° incluso tappi e staffe
2m profile surface mount with opal diffuser and caps included



I-PROFILO-LOOP-CAP
8031414881857

Tappi per profilo in alluminio loop
2 pcs kit caps for LOOP profile



I-PROFILO-TUBE-2
8031414881925

Profilo tubolare bianco ø 60mm base in alluminio tube 2m incluso tappi
2m profile with opal diffuser and caps included



I-PROFILO-TUBE-CAP
8031414881932

Tappi per profilo tubolare ø 60mm base in alluminio tube
2 pcs kit caps for TUBE profile

I-PROFILO-TUBE-SOSP
8031414882243

Kit cavi acciaio sospensione 2,5m profilo tubolare tube
Kit suspension mountig system



PROFILI

Profili in alluminio per installazione a muro/soffitto o sospensione

Aluminum profile for wall/celing or sospension installation

PROFILI
profile

Profili in alluminio

Aluminium profile



I-PROFILO-LINEA-2-BCO
8031414881963

Profilo in alluminio bianco linea 2m incluso tappi e staffe
2m black profile with opal diffuser,bracket and caps included



I-PROFILO-LINEA-BCO-CAP
8031414881970

Tappi per profilo in alluminio linea bianco
2 pcs kit caps for LINEA profile



I-PROFILO-LINEA-2-NER
8031414881987

Profilo in alluminio nero linea 2m incluso tappi e staffe
2m black profile with black diffuser,bracket and caps included



I-PROFILO-LINEA-NER-CAP
8031414882199

Tappi per profilo in alluminio linea nero
2 black pcs kit caps for LINEA profile



I-PROFILO-MILANO
8031434611854

Profilo 1m diffusore opale tappi e staffette inclusi
Profile 1m with opal diffuser, caps and bracket included





I-PROFILO-MILANO-2
8031440359412

Profilo 2m diffusore opale tappi e staffette inclusi
Profile 2m with opal diffuser, caps and bracket included





I-PROFILO-MILANO-2 BCO
8031414871100

Profilo BIANCO 2m diffusore opale tappi e staffette inclusi
WHITE profile 2m with opal diffuser, caps and bracket included



I-PROF-MILANO2-DIFF
8031440357654

Diffusore trasparente profilo Milano alluminio
PC trasparent diffuser for Berlino.





I-PROFILO-CAMELOT
8031414871087

Profilo flessibile 2m diffusore opale tappi e staffette inclusi
Flexible profile 2m with opal diffuser, caps and bracket included





I-PROFILO-DUAL-2-BCO
8031414881864

Profilo in alluminio bianco doppia emissione 2m incluso tappi e staffe
2m biemission profile



I-PROFILO-DUAL-BCO-CAP
8031414881871

Tappi per profilo in alluminio dual doppia emissione bianco
2 pcs kit caps for DUAL profile



I-PROFILO-DUAL-2-NER
8031414881888

Profilo in alluminio nero doppia emissione 2m incluso tappi e staffe
2m black biemission profile

I-PROFILO-DUAL-NER-CAP
8031414881895

Tappi per profilo in alluminio dual doppia emissione nero
2 black pcs kit caps for DUAL profile





I-PROFILO-VEIL-2
8031414881901

Profilo in alluminio bianco a veletta singola emissione 2m incluso tappi e staffe
2m single emission white aluminum profile icaps and brackets included



I-PROFILO-VEIL-CAP
8031414881918

Tappi per profilo in alluminio veil a veletta singola emissione bianco
2 pcs kit caps for VEIL profile



I-PROFILO-PIANO-2
8031414878802

Profilo base per dissipazione strip colore silver 2m
2m profile dissipation base silver colour



ACCESSORI *accessories*

Accessori per barre LED
LED bar accessories



STRIP-HANDSENSOR-W
8031414879335

Scheda rilevatore movimento mano per strip singolo colore Input DC12V-24V output DC12V-24V 60/120W 5A max
Hand motion card for single color strip DC12V-24V output DC12V-24V 60/120W 5A max



Funzioni sensore interruttore
Motion sensor switch





STRIP-PIRSENSOR
8031414879373

Scheda sensore movimento pir per strip Input DC12V-24V
output DC12V-24V 60/120W 5A max
Pir motion sensor card for strip DC12V-24V output DC12V-24V 60/120W 5A max



Funzioni sensore movimento
Motion sensor function





STRIP-TOUCH-W
8031414879359

Scheda pulsante touch per strip singolo colore Input DC12V-24V output DC12V-24V 60/120W 5A max
Touch botton card for single color strip DC12V-24V output DC12V-24V 60/120W 5A max



Funzioni sensore touch
Touch sensor function

Passando sul sensore entro i 0,5 secondi si attiva la funzione ON/OFF.
Restando sul sensore oltre i 0,5 secondi si attiva la funzione di regolazione di intensità luminosa (massima - minima - massima)
When touching the sensor within 0,5 second the switch status changes (ON/OFF).
When touching the sensor for over 0,5 second the switch turn to adjustment status (high - low - high)

PROFILI

Profili in gesso verniciabile per dare omogeneità tra parete e corpo illuminante

Paintable gypsum profile to give homogeneity between the wall and the lighting body





I-PROFY-BIS
8031414882359

Profilo in gesso per led biemissione incluso anima in alluminio e diffusori in pc 1000x61x41mm
gypsum profile including PC cover and aluminum

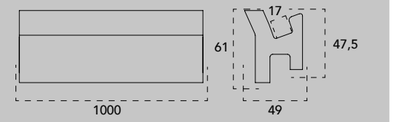



I-PROFY-BIS-L
8031414882380

Angolo l per profilo in gesso per led biemissione incluso anima in alluminio e diffusori in pc
gypsum corner for BIS profile including PC cover and aluminum





I-PROFY-GIMEL
8031414882410

Profilo in gesso per led singola emissione veletta gimel anima alluminio e diff. Pc
gypsum profile including PC cover and aluminum

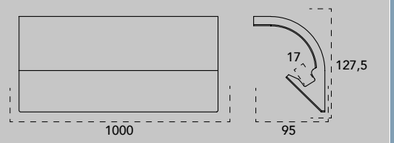



I-PROFY-GIMEL-L
8031414882427

Angolo l per profilo in gesso per led singola emissione veletta gimel anima alluminio e diff. Pc
gypsum corner for GIMEL profile including PC cover and aluminum





I-PROFY-MONO
8031414882366

Profilo in gesso per led singola emissione angolo 90° anima alluminio e diff. Pc 1000x61x41m
gypsum profile including PC cover and aluminum

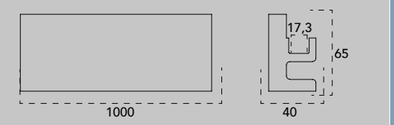



I-PROFY-MONO-L
8031414882397

Angolo l per profilo in gesso per led singola emissione angolo 90° anima alluminio e diff. Pc
gypsum corner for MONO profile including PC cover and aluminum





I-PROFY-VELA
8031414882373

Profilo in gesso per led singola emissione veletta anima alluminio e diff. Pc 1000x61x41m
gypsum profile including PC cover and aluminum





I-PROFY-VELA-L
8031414882403

Angolo l per profilo in gesso per led singola emissione veletta anima alluminio e diff. Pc
gypsum corner for VELA profile including PC cover and aluminum



STRIP

Rotolo 5 metri strip LED

Roll 5 meters strip-led



Materiale
Kapton senza silicone

Material
Kapton without silicone

Sorgente luminosa
480 LED COB

Light source
480 LED COB

Potenza
15W/m

Power
15W/m

Driver
DC24V tensione costante non incluso

Driver
DC24V costant voltage not included

Temperatura colore
3000K - 6000K - 4000K

Color temperature
3000K - 6000K - 4000K

Flusso luminoso
1725Lm/m

Luminous flux
1725Lm/m

Grado di protezione
IP20

IP degree
IP20

Durata e on/off
50.000h ~ >25.000 on/off

Lifetime and on/off
50.000h ~ >25.000 on/off

CRI
>85

CRI
>85

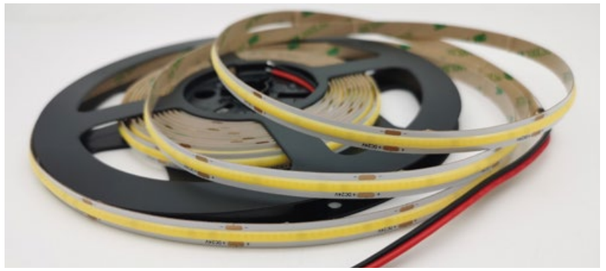

		W/m	Lm/m
STRIP24V-COB-480C 8031414881697		15W	1725 LM
STRIP24V-COB-480F 8031414881703		15W	1725 LM
STRIP24V-COB-480M 8031414881703		15W	1725 LM

Misure - Size



Misura taglio
cut - size



Fotometria del Prodotto

Photometric curve of the product



STRIP24V-COB-480

Driver pag. 701

Controller pag. 708

STRIP

Rotolo 5 metri strip LED

Roll 5 meters strip-led



Materiale
Kapton con silicone

Material
Kapton with silicone

Sorgente luminosa
480 LED COB

Light source
480 LED COB

Potenza
15W/m

Power
15W/m

Driver
DC24V tensione costante non incluso

Driver
DC24V costant voltage not included

Temperatura colore
3000K - 6000K - 4000K

Color temperature
3000K - 6000K - 4000K

Flusso luminoso
1725Lm/m

Luminous flux
1725Lm/m

Grado di protezione
IP67

IP degree
IP67

Durata e on/off
50.000h ~ >25.000 on/off

Lifetime and on/off
50.000h ~ >25.000 on/off

CRI
>85

CRI
>85



		W/m	Lm/m
STRIP24V-COB-IP67-480C 8031414881710		15W	1725 LM
STRIP24V-COB-IP67-480F 8031414881734		15W	1725 LM
STRIP24V-COB-IP67-480M 8031414881727		15W	1725 LM

Misure - Size



Misura taglio
cut - size



Fotometria del Prodotto

Photometric curve of the product



STRIP24V-COB-480

Driver pag. 701

Controller pag. 708

STRIP

Rotolo 30 metri strip LED

Materiale
Kapton senza silicone

Sorgente luminosa
90xLED/m SMD 2835

Potenza
7,2W/m

Driver
DC36V tensione costante non incluso

Temperatura colore
3000K - 5000K - 4000K

Flusso luminoso
720Lm/m

Grado di protezione
IP20

Durata e on/off
25.000h ~ >15.000 on/off

CRI
>85

Roll 30 meters strip-led

Material
Kapton without silicone

Light source
90xLED/m SMD 2835

Power
7,2W/m

Driver
DC36V costant voltage not included

Color temperature
3000K - 5000K - 4000K

Luminous flux
720Lm/m

IP degree
IP20

Lifetime and on/off
25.000h ~ >15.000 on/off

CRI
>85



		W/m	Lm/m	LED/m
STRIPLED-CC30-C 8031414864409		7,2W	720 LM	90 LED
STRIPLED-CC30-F 8031414864386		7,2W	720 LM	90 LED
STRIPLED-CC30-M 8031414864379		7,2W	720 LM	90 LED

Misure - Size



Misura taglio
cut - size



Driver pag. 701

Controller pag. 708

Fotometria del Prodotto

Photometric curve of the product



STRIPLED-CC30

STRIP

Rotolo strip LED 5 metri

Materiale
Kapton senza silicone

Sorgente luminosa
60xLED/m SMD 2835

Potenza
12W/m

Driver
DC24V tensione costante non incluso

Temperatura colore
3000K - 6000K - 4000K

Flusso luminoso
1260 Lm/m

Grado di protezione
IP20

Durata e on/off
50.000h >25.000 on/off

CRI
>85

5 meters roll strip LED

Material
Kapton without silicone

Light source
60xLED/m SMD 2835

Power
12W/m

Driver
DC24V costant voltage not included

Color temperature
3000K - 6000K - 4000K

Luminous flux
1260 Lm/m

IP degree
IP20

Lifetime and on/off
50.000h >25.000 on/off

CRI
>85

EASY DOMOTICA

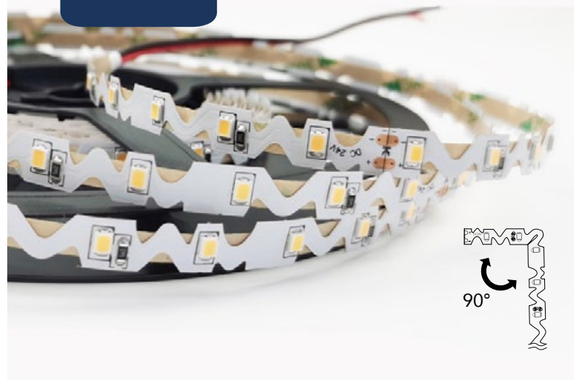



		W/m	Lm/m	LED/m
STRIP24V-2835-3D-60C 8031414878765		12W	1260LM	60 LED
STRIP24V-2835-3D-60F 8031414878628		12W	1260LM	60 LED
STRIP24V-2835-3D-60M 8031414878727		12W	1260LM	60 LED

Misure - Size



Misura taglio
cut - size



Driver pag. 701

Controller pag. 708

Fotometria del Prodotto

Photometric curve of the product



STRIP24V-2835-3D-60

STRIP

Rotolo strip LED 5 metri

5 meters roll strip LED

EASY DOMOTICA



Materiale
Kapton senza silicone

Material
Kapton without silicone

Sorgente luminosa
60xLED/m SMD 2835

Light source
60xLED/m SMD 2835

Potenza
12W/m

Power
12W/m

Driver
DC24V tensione costante non incluso

Driver
DC24V costant voltage not included

Temperatura colore
3000K - 6000K - 4000K

Color temperature
3000K - 6000K - 4000K

Flusso luminoso
1260Lm/m

Luminous flux
1260Lm/m

Grado di protezione
IP20

IP degree
IP20

Durata e on/off
50.000h >25.000 on/off

Lifetime and on/off
50.000h >25.000 on/off

CRI
>85

CRI
>85



		W/m	Lm/m	LED/m
STRIP24V-2835-60C 8031414871278		12W	1260LM	60 LED
STRIP24V-2835-60F 8031414871292		12W	1260LM	60 LED
STRIP24V-2835-60M 8031414871285		12W	1260LM	60 LED

Misure - Size



Misura taglio
cut - size



Fotometria del Prodotto

Photometric curve of the product



STRIP24V-2835-60

Driver pag. 701

Controller pag. 708

STRIP

Rotolo strip LED 5 metri

5 meters roll strip LED

EASY DOMOTICA

IP67



Materiale
Kapton con rivestimento in silicone

Material
Kapton with silicone cover

Sorgente luminosa
60xLED/m SMD 2835

Light source
60xLED/m SMD 2835

Potenza
12W/m

Power
12W/m

Driver
DC24V tensione costante non incluso

Driver
DC24V costant voltage not included

Temperatura colore
3000K - 6000K - 4000K

Color temperature
3000K - 6000K - 4000K

Flusso luminoso
1260Lm/m

Luminous flux
1260Lm/m

Grado di protezione
IP67

IP degree
IP67

Durata e on/off
50.000h >25.000 on/off

Lifetime and on/off
50.000h >25.000 on/off

CRI
>85

CRI
>85



		W/m	Lm/m	LED/m
STRIP24V-2835IP67-60C 8031414871308		12W	1260 LM	60 LED
STRIP24V-2835IP67-60F 8031414871322		12W	1260 LM	60 LED
STRIP24V-2835IP67-60M 8031414871315		12W	1260 LM	60 LED

Misure - Size



Misura taglio
cut - size



Fotometria del Prodotto

Photometric curve of the product



STRIP24V-2835IP67-60

Driver pag. 701

Controller pag. 708

STRIP

Rotolo 5 metri strip LED ultrasottile

Roll 5 meters strip-led

EASY DOMOTICA



Materiale
Kapton senza silicone

Sorgente luminosa
120xLED/m SMD 2835

Potenza
18W/m

Driver
DC24V tensione costante non incluso

Temperatura colore
3000K - 6000K - 4000K

Flusso luminoso
1890Lm/m

Grado di protezione
IP20

Durata e on/off
25.000h ~ >15.000 on/off

CRI
>80

Material
Kapton without silicone

Light source
120xLED/m SMD 2835

Power
18W/m

Driver
DC24V costant voltage not included

Color temperature
3000K - 6000K - 4000K

Luminous flux
1890Lm/m

IP degree
IP20

Lifetime and on/off
25.000h ~ >15.000 on/off

CRI
>80



		W/m	Lm/m
STRIP24V-SLIM-120C 8031414881741		15W	1890 LM
STRIP24V-SLIM-120F 8031414881765		15W	1890 LM
STRIP24V-SLIM-120M 8031414881758		15W	1890 LM

Misure - Size



Misura taglio
cut - size



Driver pag. 701

Controller pag. 708

Fotometria del Prodotto

Photometric curve of the product



STRIP24V-COB-480

STRIP

Rotolo strip LED 5 metri

5 meters Roll strip-led

EASY DOMOTICA



Materiale
Kapton senza silicone

Sorgente luminosa
120xLED/m SMD 2835

Potenza
18W/m

Driver
DC24V tensione costante non incluso

Temperatura colore
3000K - 6000K - 4000K - BLU

Flusso luminoso
2072Lm/m

Grado di protezione
IP20

Durata e on/off
50.000h >25.000 on/off

CRI
>85

Material
Kapton without silicone

Light source
120xLED/m SMD 2835

Power
18W/m

Driver
DC24V costant voltage not included

Color temperature
3000K - 6000K - 4000K - BLU

Luminous flux
2072Lm/m

IP degree
IP20

Lifetime and on/off
50.000h ~ >25.000 on/off

CRI
>85



PER UNA CORRETTA DISSIPAZIONE APPLICARE LA STRIP SU UN SUPPORTO D'ALLUMINIO
FOR CORRECT DISSIPATION FIX THE STRIP ON ALUMINIUM SUPPORT

		W/m	Lm/m	LED/m
STRIP24V-2835-120C 8031414871056		18W	2072 LM	120 LED
STRIP24V-2835-120F 8031414871032		18W	2072 LM	120 LED
STRIP24V-2835-120M 8031414871063		18W	2072 LM	120 LED
STRIP24V-2835-120BLU 8031414871049		18W	---	120 LED

Misure - Size



Misura taglio
cut - size



Driver pag. 701

Controller pag. 708

Fotometria del Prodotto

Photometric curve of the product



STRIP24V-2835-120

STRIP

Rotolo 5 metri strip LED

Materiale
Kapton con silicone

Sorgente luminosa
120 LED COB

Potenza
18W/m

Driver
DC24V tensione costante non incluso

Temperatura colore
6000K

Flusso luminoso
1890Lm/m

Grado di protezione
IP68

Durata e on/off
50.000h ~ >25.000 on/off

CRI
>80

Roll 5 meters strip-led

Material
Kapton with silicone

Light source
120 LED COB

Power
18W/m

Driver
DC24V costant voltage not included

Color temperature
6000K

Luminous flux
1890Lm/m

IP degree
IP68

Lifetime and on/off
50.000h ~ >25.000 on/off

CRI
>80

EASY DOMOTICA

IP68





	W/m	Lm/m
STRIP24V-2835IP68-120F 8031414881772	18W	1890 LM

Misure - Size



Misura taglio
cut - size



Driver pag. 701

Controller pag. 708

Fotometria del Prodotto

Photometric curve of the product



STRIP24V-2835IP68-120F

STRIP

Rotolo strip LED 5 metri

Materiale
Kapton senza silicone

Sorgente luminosa
120xLED/m SMD 2835

Potenza
24W/m

Driver
DC24V tensione costante non incluso

Temperatura colore

CCT

Flusso luminoso
1000Lm/m 1000Lm/m 2000Lm/m

Grado di protezione
IP20

Durata e on/off
50.000h ~ >25.000 on/off

CRI
>85

5 meters roll strip LED

Material
Kapton without silicone

Light source
120xLED/m SMD 2835

Power
24W/m

Driver
DC24V costant voltage not included

Colour temperature

CCT

Luminous flux
1000Lm/m 1000Lm/m 2000Lm/m

IP degree
IP20

Lifetime and on/off
50.000h ~ >25.000 on/off

CRI
>85

EASY DOMOTICA





	W/m	Lm/m	LED/m
STRIP24V-2835-CCT 8031414875795	24W	1000LM 2000LM	120 LED

Misure - Size



Misura taglio
cut - size



Driver pag. 701

Controller pag. 708

Fotometria del Prodotto

Photometric curve of the product



STRIP24V-2835-CCT

STRIP

Rotolo strip LED 5 metri

5 meters Roll strip-led

EASY DOMOTICA



Materiale
Kapton senza silicone

Sorgente luminosa
240xLED/m SMD 2835

Potenza
24W/m

Driver
DC24V tensione costante non incluso

Temperatura colore
3000K - 6000K - 4000K

Flusso luminoso
2520Lm/m

Grado di protezione
IP20

Durata e on/off
50.000h ~ >25.000 on/off

CRI
>90

Material
Kapton without silicone

Light source
240xLED/m SMD 2835

Power
24W/m

Driver
DC24V costant voltage not included

Color temperature
3000K - 6000K - 4000K

Luminous flux
2520Lm/m

IP degree
IP20

Lifetime and on/off
50.000h ~ >25.000 on/off

CRI
>90



PER UNA CORRETTA DISSIPAZIONE APPLICARE LA STRIP SU UN SUPPORTO D'ALLUMINIO
FOR CORRECT DISSIPATION FIX THE STRIP ON ALUMINIUM SUPPORT

		W/m	Lm/m	LED/m
STRIP24V-2835-240C 8031414871018		24W	2520 LM	240 LED
STRIP24V-2835-240F 8031414871001		24W	2520 LM	240 LED
STRIP24V-2835-240M 8031414871025		24W	2520 LM	240 LED

Misure - Size



Misura taglio
cut - size



Fotometria del Prodotto

Photometric curve of the product



STRIP24V-2835-240

Driver pag. 701

Controller pag. 708

STRIP

Rotolo strip LED 5 metri

5 meters roll strip LED

EASY DOMOTICA



Materiale
Kapton senza silicone

Sorgente luminosa
60xLED/m SMD 5050

Potenza
14,4W/m

Driver
DC24V tensione costante non incluso

Temperatura colore
3000K - 6000K - 4000K

Flusso luminoso
1296Lm/m

Grado di protezione
IP20

Durata e on/off
50.000h >25.000 on/off

CRI
>85

Material
Kapton without silicone

Light source
60xLED/m SMD 5050

Power
14,4W/m

Driver
DC24V costant voltage not included

Color temperature
3000K - 6000K - 4000K

Luminous flux
1296Lm/m

IP degree
IP20

Lifetime and on/off
50.000h >25.000 on/off

CRI
>85



		W/m	Lm/m	LED/m
STRIP24V-5050-60C 8031414878420		14,4W	1296 LM	60 LED
STRIP24V-5050-60F 8031414876129		14,4W	1296 LM	60 LED
STRIP24V-5050-60M 8031414878741		14,4W	1296 LM	60 LED

Misure - Size



Misura taglio
cut - size



Fotometria del Prodotto

Photometric curve of the product



STRIP24V-5050-60

Driver pag. 701

Controller pag. 708

STRIP

Rotolo strip LED 5 metri

5 meters roll strip LED



Materiale
Kapton con rivestimento in silicone

Sorgente luminosa
60xLED/m SMD 5050

Potenza
14,4W/m

Driver
DC24V tensione costante non incluso

Temperatura colore
3000K - 6000K - 4000K

Flusso luminoso
1296Lm/m

Grado di protezione
IP67

Durata e on/off
50.000h >25.000 on/off

CRI
>85

Material
Kapton with silicone cover

Light source
60xLED/m SMD 5050

Power
14,4W/m

Driver
DC24V costant voltage not included

Color temperature
3000K - 6000K - 4000K

Luminous flux
1296Lm/m

IP degree
IP67

Lifetime and on/off
50.000h >25.000 on/off

CRI
>85



	W/m	Lm/m	LED/m
STRIP24V-5050IP67-60C 8031414876143	14,4W	1296 LM	60 LED
STRIP24V-5050IP67-60F 8031414876174	14,4W	1296 LM	60 LED
STRIP24V-5050IP67-60M 8031414876150	14,4W	1296 LM	60 LED

Misure - Size



Misura taglio
cut - size



Driver pag. 701

Controller pag. 708

Fotometria del Prodotto

Photometric curve of the product



STRIP24V-5050IP67-60

STRIP

Rotolo 15 metri strip LED

15 meters roll strip-led



Materiale
Kapton senza silicone

Sorgente luminosa
60xLED/m SMD 5050

Potenza
10W/m

Driver
DC24V tensione costante non incluso

Temperatura colore
R G B

Grado di protezione
IP20

Durata e on/off
25.000h ~ >15.000 on/off

Material
Kapton without silicone

Light source
60xLED/m SMD 5050

Power
10W/m

Driver
DC24V costant voltage not included

Color temperature
R G B

IP degree
IP20

Lifetime and on/off
25.000h ~ >15.000 on/off



	W/m	LED/m
STRIPLED-CC15-RGB 8031414864560	10W	60 LED

Misure - Size



Misura taglio
cut - size



Driver pag. 701

Controller pag. 708

Fotometria del Prodotto

Photometric curve of the product



STRIPLED-CC15

STRIP

Rotolo strip LED 5 metri

5 meters roll strip LED

EASY DOMOTICA



Materiale
Kapton senza silicone

Material
Kapton without silicone

Sorgente luminosa
60xLED/m SMD 5050

Light source
60xLED/m SMD 5050

Potenza
14,4W/m

Power
14,4W/m

Driver
DC24V tensione costante non incluso

Driver
DC24V costant voltage not included

Temperatura colore
R G B

Color temperature
R G B

Grado di protezione
IP20

IP degree
IP20

Durata e on/off
50.000h ~ >25.000 on/off

Lifetime and on/off
50.000h ~ >25.000 on/off



	W/m	LED/m
STRIP24V-5050-RGB 8031414871360	14,4W	60 LED

Misure - Size



Misura taglio
cut - size



Driver pag. 701

Controller pag. 708

Fotometria del Prodotto

Photometric curve of the product



STRIP24V-5050-RGB

STRIP

Rotolo strip LED 5 metri

5 meters roll strip LED

EASY DOMOTICA

IP67



Materiale
Kapton con rivestimento in silicone

Material
Kapton with silicone cover

Sorgente luminosa
60xLED/m SMD 5050

Light source
60xLED/m SMD 5050

Potenza
14,4W/m

Power
14,4W/m

Driver
DC24V tensione costante non incluso

Driver
DC24V costant voltage not included

Temperatura colore
R G B

Color temperature
R G B

Grado di protezione
IP67

IP degree
IP67

Durata e on/off
50.000h ~ >25.000 on/off

Lifetime and on/off
50.000h ~ >25.000 on/off



	W/m	LED/m
STRIP24V-5050RGB-IP67 8031414871377	14,4W	60 LED

Misure - Size



Misura taglio
cut - size



Driver pag. 701

Controller pag. 708

Fotometria del Prodotto

Photometric curve of the product



STRIP24V-5050RGB-IP67

STRIP

Rotolo strip LED 5 metri

Materiale
Kapton senza silicone

Sorgente luminosa
60xLED/m SMD 5050

Potenza
19,2W/m

Driver
DC24V tensione costante non incluso

Temperatura colore
RGB + 4000K

Flusso luminoso
570Lm/m

Grado di protezione
IP20

Durata e on/off
50.000h ~ >25.000 on/off

CRI
>85

5 meters roll strip LED

Material
Kapton without silicone

Light source
60xLED/m SMD 5050

Power
19,2W/m

Driver
DC24V costant voltage not included

Colour temperature
RGB + 4000K

Luminous flux
570Lm/m

IP degree
IP20

Lifetime and on/off
50.000h ~ >25.000 on/off

CRI
>85

EASY DOMOTICA





	W/m	Lm/m	LED/m
STRIP24V-5050-RGBW 8031414871384	19,2W	570 LM	60 LED

Misure - Size



Misura taglio
cut - size



Driver pag. 701

Controller pag. 708

Fotometria del Prodotto

Photometric curve of the product



STRIP24V-5050-RGBW

STRIP

Rotolo strip LED 5 metri

Materiale
Kapton con rivestimento in silicone

Sorgente luminosa
60xLED/m SMD 5050

Potenza
19,2W/m

Driver
DC24V tensione costante non incluso

Temperatura colore
RGB + 4000K

Flusso luminoso
570Lm/m

Grado di protezione
IP68

Durata e on/off
50.000h ~ >25.000 on/off

CRI
>85

5 meters roll strip LED

Material
Kapton with silicone cover

Light source
60xLED/m SMD 5050

Power
19,2W/m

Driver
DC24V costant voltage not included

Colour temperature
RGB + 4000K

Luminous flux
570Lm/m

IP degree
IP68

Lifetime and on/off
50.000h ~ >25.000 on/off

CRI
>85

EASY DOMOTICA

IP68





	W/m	Lm/m	LED/m
STRIP24V-5050RGBW-IP68 8031414871407	19,2W	570LM	60 LED

Misure - Size



Misura taglio
cut - size



Driver pag. 701

Controller pag. 708

Fotometria del Prodotto

Photometric curve of the product



STRIP24V-5050RGBW-IP68

STRIP

Rotolo strip LED 5 metri

5 meters roll strip LED

EASY DOMOTICA





Materiale
Kapton senza silicone

Material
Kapton without silicone

Sorgente luminosa
48xLED/m SMD 5050

Light source
48xLED/m SMD 5050

Potenza
10W/m

Power
10W/m

Driver
DC24V tensione costante non incluso

Driver
DC24V costant voltage not included

Temperatura colore
RGB + 4000K

Color temperature
RGB + 4000K

Flusso luminoso
264Lm/m

Luminous flux
264Lm/m

Grado di protezione
IP20

IP degree
IP20

Durata e on/off
50.000h ~ >25.000 on/off

Lifetime and on/off
50.000h ~ >25.000 on/off

CRI
>80

CRI
>80



	W/m	Lm/m	LED/m
STRIP24V-5050-3D-RGBW 8031414878819	**10W**	**264 LM**	**48 LED**

Misure - Size



Misura taglio
cut - size



Driver pag. 701

Controller pag. 708

Fotometria del Prodotto

Photometric curve of the product



STRIP24V-5050-3D-R-GBW

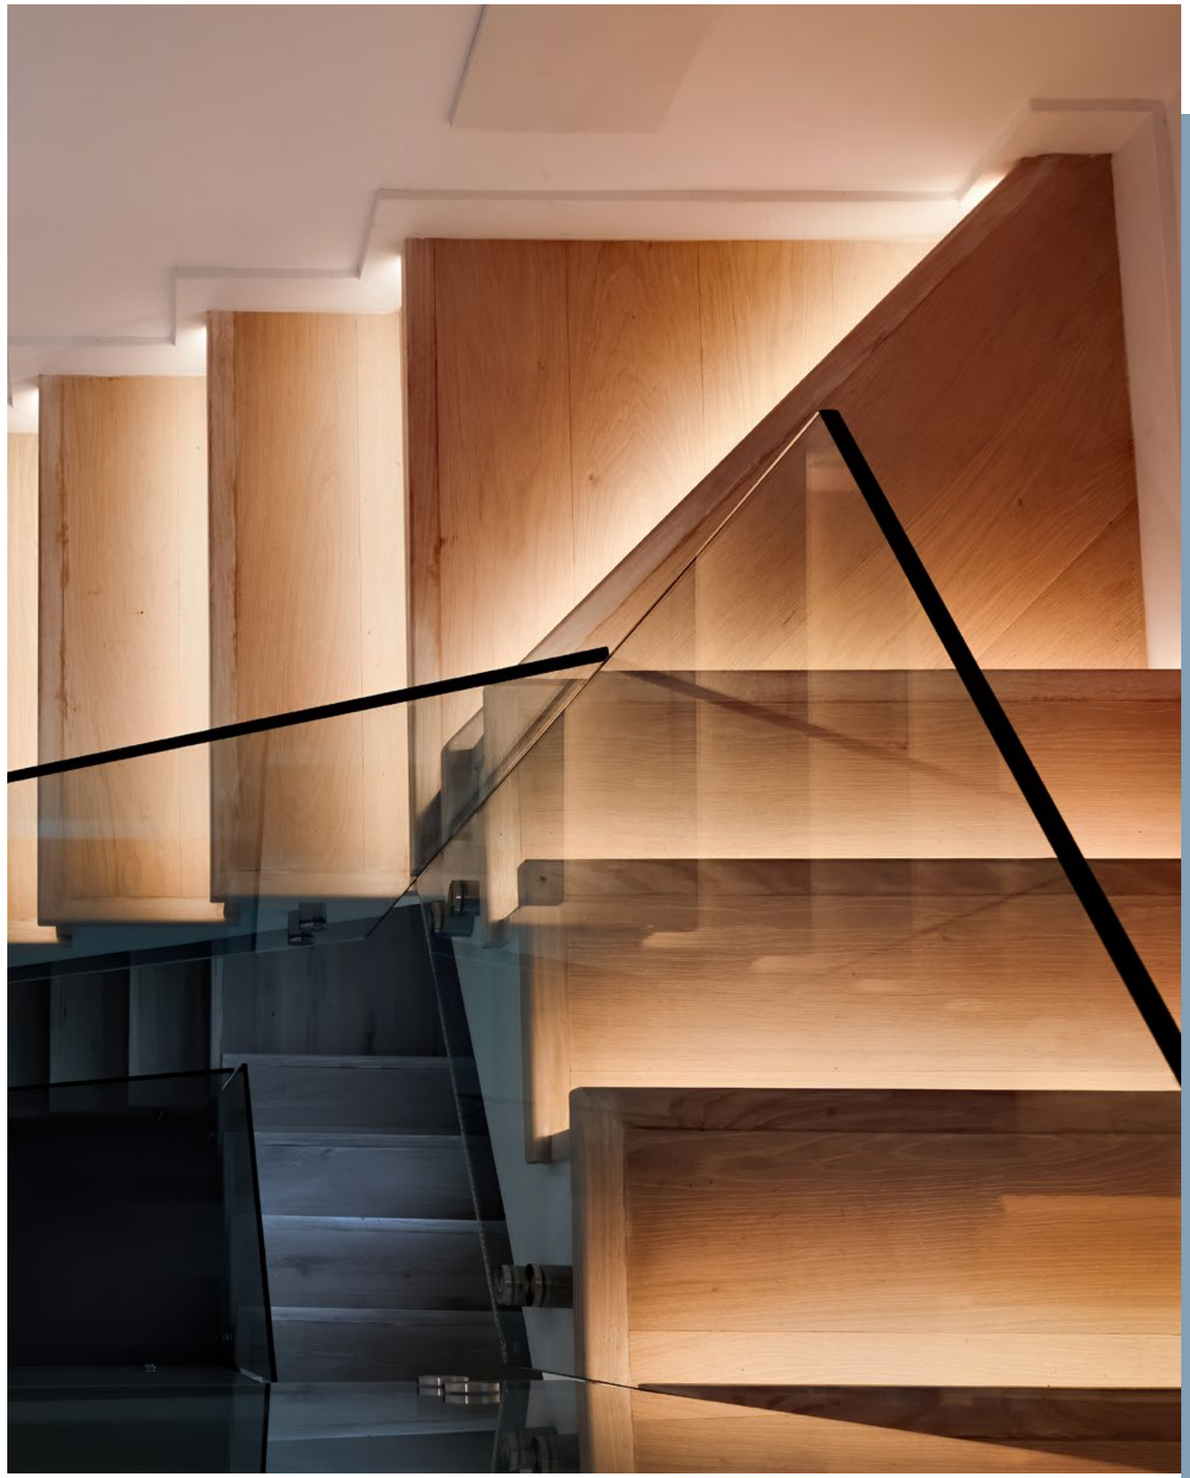

STRIP

Rotolo strip LED 5 metri

Materiale
Kapton senza silicone

Sorgente luminosa
60xLED/m SMD 5050

Potenza
19,2W/m

Driver
DC24V tensione costante non incluso

Temperatura colore

Flusso luminoso
500Lm/m

Grado di protezione
IP20

Durata e on/off
50.000h ~ >25.000 on/off

CRI
>85

5 meters roll strip LED

Material
Kapton without silicone

Light source
60xLED/m SMD 5050

Power
19,2W/m

Driver
DC24V costant voltage not included

Colour temperature

Luminous flux
500Lm/m

IP degree
IP20

Lifetime and on/off
50.000h ~ >25.000 on/off

CRI
>85

EASY DOMOTICA



	W/m	Lm/m	LED/m
STRIP24V-5050-RGBCCT 8031414871391	19,2W	500LM	60 LED

Misure - Size



Misura taglio
cut - size



Driver pag. 701

Controller pag. 708

Fotometria del Prodotto

Photometric curve of the product



STRIP24V-5050-RGBCCT

STRIP

Rotolo strip LED 5 metri

Materiale
Kapton senza silicone

Sorgente luminosa
168xLED/m SMD 3838

Potenza
24W/m

Driver
DC24V tensione costante non incluso

Temperatura colore
RGB

Grado di protezione
IP20

Durata e on/off
50.000h ~ >25.000 on/off

5 meters roll strip LED

Material
Kapton without silicone

Light source
168xLED/m SMD 3838

Power
24W/m

Driver
DC24V costant voltage not included

Colour temperature
RGB

IP degree
IP20

Lifetime and on/off
50.000h ~ >25.000 on/off

EASY DOMOTICA





	W/m	LED/m
STRIP24V-3838-168RGB 8031414877898	24W	168 LED

Misure - Size



Misura taglio
cut - size



Driver pag. 701

Controller pag. 708

Fotometria del Prodotto

Photometric curve of the product



STRIP24V-3838-168RGB

STRIP

SMART INTEC Wi-Fi



Kit strip LED Wi-Fi	Kit strip LED Wi-Fi
Materiale	**Material**
Kapton senza silicone	Kapton without silicone
Sorgente luminosa	**Light source**
60xLED SMD 5050	60xLED/m SMD 5050
Potenza	**Power**
6,5W/m	6,5W/m
Driver	**Driver**
12V DC incluso	12V DC incluso
Temperatura colore	**Color temperature**
RGB + 4000K	RGB + 4000K
Grado di protezione	**IP degree**
IP20	IP20
Durata e on/off	**Lifetime and on/off**
25.000h ~ >12.500 on/off	25.000h ~ >12.500 on/off
CRI	**CRI**
>80	>80



STRIP24V-5050RGBW-INT 8031414881796		19,5W

Driver + accessori Wi-Fi inclusi
Diver + Wi-Fi accesories included

Telecomando incluso
Remote control included



Misure - Size

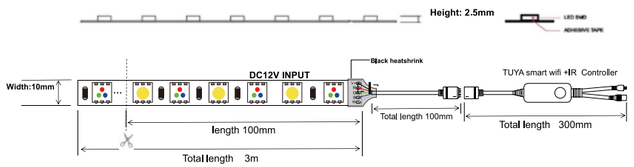

STRIP

SMART INTEC Wi-Fi



Kit strip LED Wi-Fi	Kit strip LED Wi-Fi
Materiale	**Material**
Kapton senza silicone	Kapton without silicone
Sorgente luminosa	**Light source**
60xLED SMD 2835	60xLED/m SMD 2835
Potenza	**Power**
6,5W/m	6,5W/m
Driver	**Driver**
12V DC incluso	12V DC incluso
Temperatura colore	**Color temperature**
3000K - 4000K	3000K - 4000K
Flusso luminoso	**Luminous flux**
650Lm/m	650Lm/m
Grado di protezione	**IP degree**
IP20	IP20
Durata e on/off	**Lifetime and on/off**
25.000h ~ >12.500 on/off	25.000h ~ >12.500 on/off
CRI	**CRI**
>80	>80



STRIP24V-2835C-INT 8031414882182		19,5W	1950 LM
STRIP24V-2835M-INT 8031414881789		19,5W	1950 LM

Driver + accessori Wi-Fi inclusi
Diver + Wi-Fi accesories included



Misure - Size

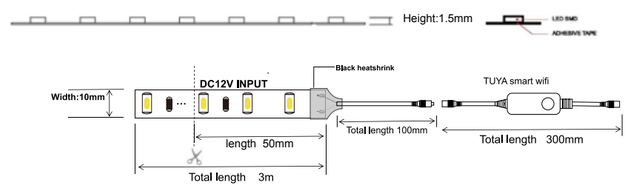

STRIP

Rotolo strip led 3 metri incluso di alimentatore

Materiale
Kapton senza silicone

Sorgente luminosa
48xLED/m SMD 2835

Potenza
10W/m

Driver
36W - 24V DC incluso

Temperatura colore
3000K - 6000K - 4000K

Flusso luminoso
820Lm/m

Grado di protezione
IP20

Durata e on/off
25.000h ~ >12.500 on/off

CRI
>85

kit 3 meters roll strip LED with driver included

Material
Kapton without silicone

Light source
48xLED/m SMD 2835

Power
10W/m

Driver
36W - 24V DC included

Color temperature
3000K - 6000K - 4000K

Luminous flux
820Lm/m

IP degree
IP20

Lifetime and on/off
25.000h ~ >12.500 on/off

CRI
>85



	W/m	Lm/m	LED/m
STRIP24V-2835C-KIT 8031414871414	10W	820 LM	48 LED
STRIP24V-2835F-KIT 8031414871438	10W	820 LM	48 LED
STRIP24V-2835M-KIT 8031414871421	10W	820 LM	48 LED



36W - 24V DC incluso
36W - 24V DC included

Misure - Size



Misura taglio
cut - size



Fotometria del Prodotto

Photometric curve of the product



STRIP24V-2835 KIT



STRIP

Kit strip led 3 metri incluso di alimentatore

Materiale
Kapton senza silicone

Sorgente luminosa
90LED SMD 5050

Potenza
21,6W

Driver
24W - 24V DC incluso

Temperatura colore
R G B

Grado di protezione
IP20

Durata e on/off
25.000h ~ >12.500 on/off

kit 3 meters roll strip LED with driver included

Material
Kapton without silicone

Light source
90LED SMD 5050

Power
21,6W

Driver
24W - 24V DC included

Colour temperature
R G B

IP degree
IP20

Lifetime and on/off
25.000h ~ >12.500 on/off





	Potenza totale 3m	Led totali 3m
	Tot power 3m	*Tot led 3m*
STRIP24V-5050RGB-KIT 8031414871445	21,6W	90XLED



24W - 24V DC incluso
24W - 24V DC included



Telecomando incluso
Remote control included



Controller RGB incluso
Controller RGB *included*

Misure - Size



Misura taglio
cut - size



Fotometria del Prodotto

Photometric curve of the product



STRIP24V-5050RGB-KIT

NEON FLEX

Rotolo 20 metri striscia led ultraflessibile in silicone

20 meters roll extra flexible led line in silicone



Materiale
Silicone

Sorgente luminosa
140xLED/m SMD 2835

Potenza
8W/m

Driver
DC24V (8,3A)
tensione costante non incluso

Temperatura colore
5000K - BLU - GIALLO - ROSSO - VERDE

Flusso luminoso
344Lm/m

Grado di protezione
IP65

Durata e on/off
25.000h - >15.000 on/off

CRI
>80

Material
Silicone

Light source
140xLED/m SMD 2835

Power
8W/m

Driver
DC24V (8,3A)
costant voltage not included

Colour temperature
5000K - BLUE - YELLOW - RED - GREEN

Luminous flux
344Lm/m

IP degree
IP65

Lifetime and on/off
25.000h - >15.000 on/off

CRI
>80

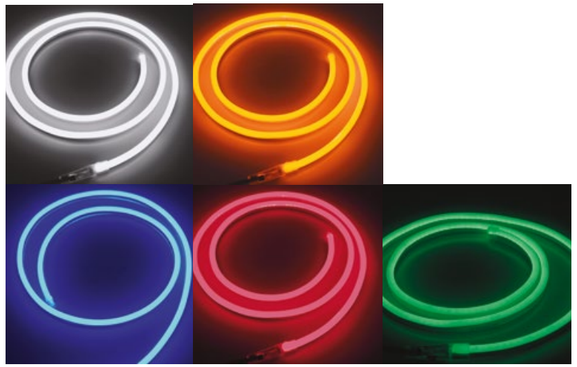

	W/m	Lm/m
NEON-FLEX-BIANCO 8031440361842	8W	344LM
NEON-FLEX-BLU 8031440364454	8W	
NEON-FLEX-GIALLO 8031440364515	8W	
NEON-FLEX-ROSSO 8031440364560	8W	
NEON-FLEX-VERDE 8031440364546	8W	

Misure - Size



Misura taglio



Driver pag. 701

Controller pag. 708

Fotometria del Prodotto

Photometric curve of the product



NEON-FLEX-BIANCO

ACCESSORI



NEON-FLEX-CAP
8031440364522

Kit 4 tappi in silicone
Kit 4 pcs silicon caps



NEON-FLEX-NEX
8031440364478

Connettore di giunzione entrata e uscita 15cm
Linkable connector input and output 15cm



NEON-FLEX-NEX-T
8031440364485

Connettore "T" a 3 entrate 30x15
"T" connector with 3 input 30x15



NEON-FLEX-POWER
8031440364508

Innesto elettrico 15cm
Electrical connector 15cm



NEON-FLEX-STAFFE
8031440364492

Kit 2pz staffe in metallo
Kit 2pcs metal brackets



INSIGN

Kit 20 pz moduli LED	Kit 20 pcs LED module
Materiale	**Material**
PC	PC
Sorgente luminosa	**Light source**
3xLED SMD 5050	3xLED SMD 5050
Driver	**Driver**
DC12V tensione costante non incluso	DC12V costant voltage not included
Temperatura colore	**Colour temperature**
6000K	6000K
Durata e on/off	**Lifetime and on/off**
50.000 h ~ >25.000 on/off	50.000 h ~ >25.000 on/off
Angolo di luce	**Beam angle**
160°	160°
CRI	**CRI**
>85	>85

EASY DOMOTICA



KIT 20pz CON CAVO 10CM
KIT 20pcs WITH CABLE 10CM

LED-INSIGN-F-LENS
8031414871155
20X1,2W- 120 Lm

Misure - Size
dimensioni in mm - size mm



Driver pag. 701

Controller pag. 708



INSIGN

Kit 20 pz moduli LED	Kit 20 pcs LED module
Materiale	**Material**
PC	PC
Sorgente luminosa	**Light source**
3xLED SMD 5050	3xLED SMD 5050
Driver	**Driver**
DC12V tensione costante non incluso	DC12V costant voltage not included
Temperatura colore	**Colour temperature**
6000K RGB +	6000K RGB +
Durata e on/off	**Lifetime and on/off**
50.000 h ~ >25.000 on/off	50.000 h ~ >25.000 on/off
Angolo di luce	**Beam angle**
120°	120°
CRI	**CRI**
>80	>80

EASY DOMOTICA

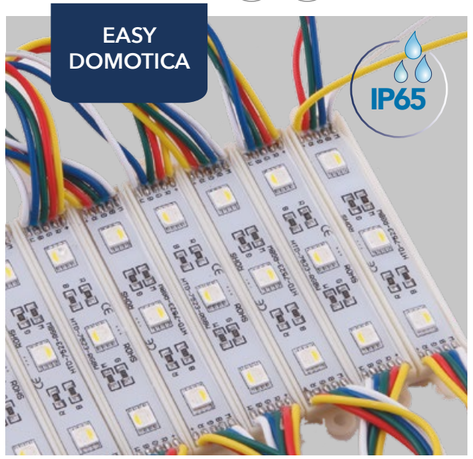



KIT 20pz CON CAVO 10CM
KIT 20pcs WITH CABLE 10CM

LED-INSIGN-RGBW
8031414862955
RGB +
20X0,96W DC12V

Misure - Size
dimensioni in mm - size mm

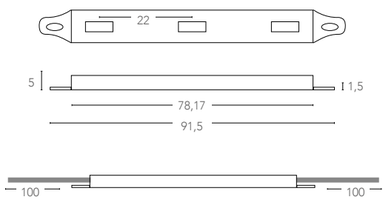



KIT 20pz CON CAVO 10CM
KIT 20pcs WITH CABLE 10CM

LED-INSIGN-F
8031414862979
20X0,72W DC12V 72 Lm

Misure - Size
dimensioni in mm - size mm

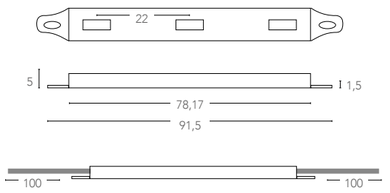

Driver pag. 701

Controller pag. 708

TAYLOR

Kit 12 pezzi luci LED fuga piastrelle

Materiale
PC

Sorgente luminosa
LED SMD

Potenza
12x0,275W

Driver
incluso

Temperatura colore
4000K

Durata e on/off
25.000 h ~ >10.000 on/off

Angolo di luce
120°

CRI
>80

LED 12 pcs set for tiles drain

Material
PC

Light source
LED SMD

Power
12x0,275W

Driver
included

Color temperature
4000K

Lifetime and on/off
25.000 h ~ >10.000 on/off

Beam angle
120°

CRI
>80

IP44



LED-TAYLOR-KIT NERO 8031440061278	12X0,275W	60 LM

Misure - Size
dimensioni in mm - size mm



Accessori inclusi
Included accessories

x12



x1



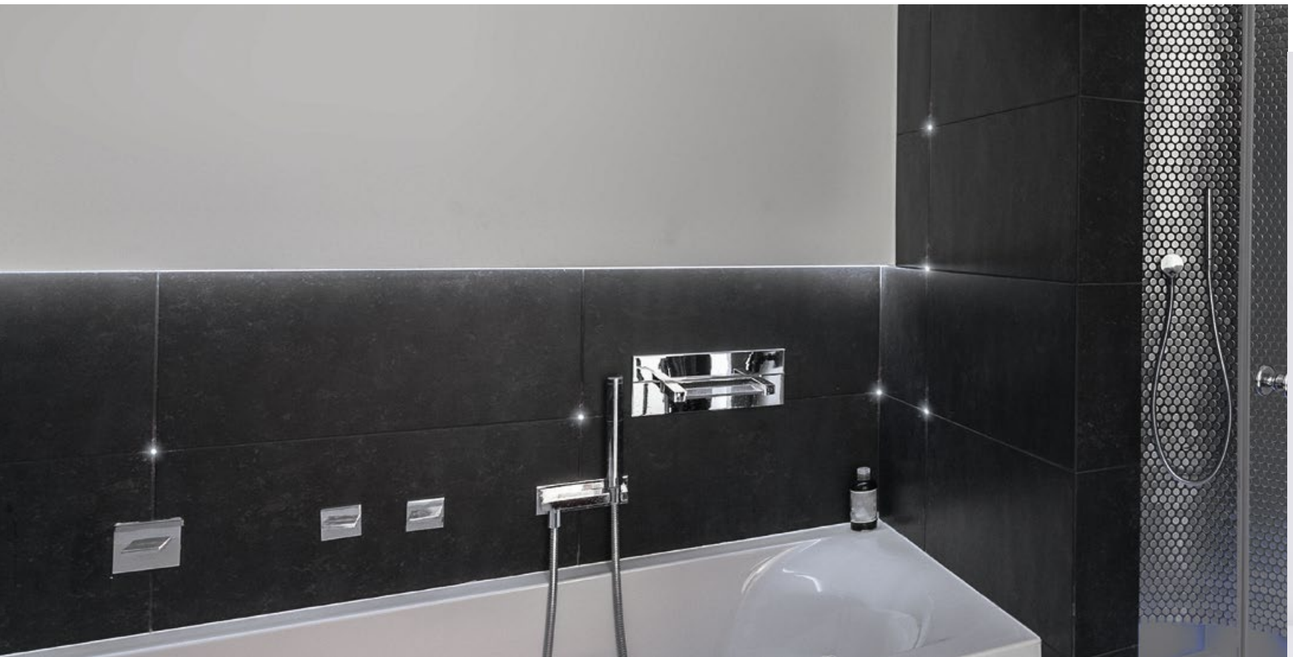

STRIP

Strip LED comando touch con attacco USB

Materiale
Kapton con rivestimento in silicone

Sorgente luminosa
15xLED SMD 5050

Colore
RGB

Grado di protezione
IP65

LED strip light with switch touch control and USB connection

Material
Kapton with silicone cover

Light source
15xLED SMD 5050

Color
RGB

IP degree
IP65



2.0/3.0
USB
DC 5V 2Ah

TOUCH CONTROL

IP65



STRIP-SURROUND 8031440354202	3,5W

Misure - Size

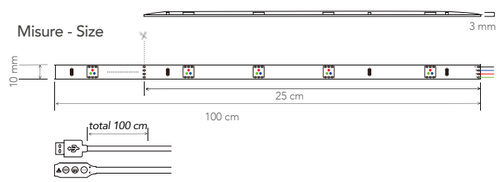







STRIP

Kit strip con telecomando e funzione RGB music color con attacco USB

Materiale

Kapton con rivestimento in silicone

Sorgente luminosa

60xLED SMD 5050

Colore

R G B

Grado di protezione

IP65

Kit strip with remote control and RGB music function with USB connection

Material

Kapton with silicone cover

Light source

60xLED SMD 5050

Color

R G B

IP degree

IP65



2.0/3.0 USB DC 5V 2Ah

IP65

CE



STRIP-SURROUND-2M	2W
8031414881802	

Misure - Size

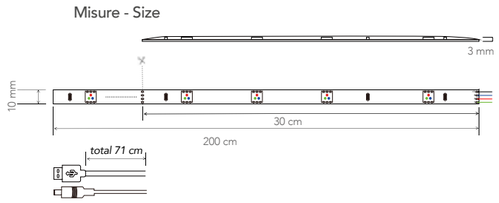



ETERNA

Plafoniera LED in policarbonato bianca batteria Ni-Cd e funzione d'emergenza combinata e permanente

Ceiling LED lamp in PC with Ni-Cd battery and double emergency function maintain/non-maintain



ETERNA

Materiale
PC
Colore
Bianco
Sorgente luminosa
LED SMD 20W - 16W
Driver
incluso
Batteria per emergenza
Inclusa Ni-Cd 6V 1800 mAh
Temperatura colore
4000K
Angolo di luce
120°
CRI
>80

Material
PC
Colour
White
Light source
LED SMD 20W - 16W
Driver
included
Battery for emergency light
included Ni-Cd 6V 1800 mAh
Color temperature
4000K
Beam angle
120°
CRI
>80

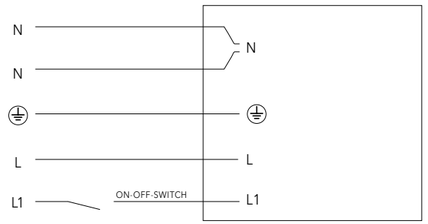



LED-ETERNA-120
8031440358538
16W
900 Lm
Emergency light
3H 120 Lm

Misure - Size
dimensioni in mm - size mm



Fotometria del Prodotto
Photometric curve of the product



LED-ETERNA-120



LED-ETERNA-54
8031440358521
20W
1160 Lm
Emergency light
3H 200 Lm

Misure - Size
dimensioni in mm - size mm



Fotometria del Prodotto
Photometric curve of the product



LED-ETERNA-54

HELP INC

Incasso LED emergenza

Emergency recessed light

Emergency light

LED SMD

Sorgente luminosa
Light source



Materiale
Policarbonato

Colore
Bianco

Driver
incluso

Batteria per emergenza
Inclusa LiFePO4 3.2V 1000mAh

Sorgente luminosa
LED SMD 1,2W

Temperatura colore
4000K

Flusso luminoso
130 Lm

CRI
>80

Material
Polycarbonate

Colour
White

Driver
included

Emergency battery
included LiFePO4 3.2V 1000mAh

Light source
LED SMD 1,2W

Color temperature
4000K

Luminous flux
130 Lm

CRI
>80

INC-HELP-R37
8031414882786
140°

Angolo di luce per open space
Open space beam angle

INC-HELP-R37-NR
8031414883097
120°X60°

Angolo di luce direzionale asimmetrico
Asymmetric directional beam angle

Fotometria del Prodotto
Photometric curve of the product



INC-HELP-R37



INC-HELP-R37-NR

Misure - size
dimensioni in mm - size mm



Foro - cut out
dimensioni in mm - size mm





HELP TRACK

Lampade di emergenza LED per sistema binario trifase

Emergency threephase lamp

Emergency light

LED SMD

Sorgente luminosa
Light source



Materiale
Policarbonato

Colore
Bianco Nero

Driver
integrato

Batteria per emergenza
Inclusa LiFePO4 3.2V 3200mAh

Sorgente luminosa
LED SMD 2W

Temperatura colore
4000K

Flusso luminoso
250 Lm

Angolo di luce
140°

CRI
>80

Material
Polycarbonate

Colour
White Black

Driver
Built-in

Emergency battery
included LiFePO4 3.2V 3200mAh

Light source
LED SMD 2W

Color temperature
4000K

Luminous flux
250 Lm

Beam angle
140°

CRI
>80



LED-HELP-B-TRACK
8031414884162

LED-HELP-W-TRACK
8031414884179

Misure - size
dimensioni in mm - size mm





HELP EXIT

Lampade a LED multiuso: emergenza a plafoniera, emergenza a incasso o uscita di emergenza

Multipurpose LED lamp surface mount, recessed mount or recessed emergency exit mount version

IP65

Emergency light

LED SMD

Sorgente luminosa
Light source



Funzione "*Maintain*" sempre accesa
Maintain function always on



Funzione "*Non-maintain*" emergenza
Non-maintain function only emergency

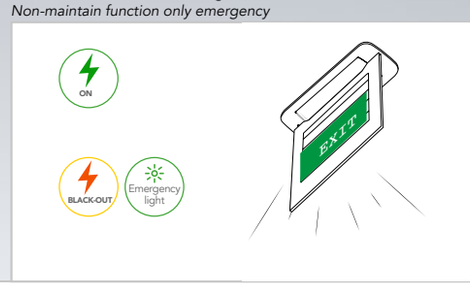

Materiale
PC

Colore
Bianco

Sorgente luminosa
LED SMD 4W

Driver
integrato

Batteria per emergenza
Inclusa 2x 7.4V 1.8Ah Li-ion 3h

Temperatura colore
4000K

Material
PC

Colour
White

Light source
LED SMD 4W

Driver
Built-in

Battery for emergency light
Included 2x 7.4V 1.8Ah Li-ion 3h

Color temperature
4000K









LED-HELP-EXIT 8031414876310	4W	400 Lm
INCLUSO ADESIVI ***WITH STICKERS KIT***	Emergency light	3H 400 Lm

Misure - size
dimensioni in mm - size mm



HELP-EXIT-KIT 8031414876327	KIT INCASSO CORNICE E MOLLE *KIT RECESSED WITH FRAME AND SPRING*

HELP-EXIT-FLAG 8031414877331	KIT BANDIERA **INCLUSO ADESIVI** *EMERGENCY FLAG **WITH STICKERS KIT***

BOLT HELP

Incasso segnapassi alloggio in cassetta di derivazione 503 con placchetta intercambiabile bianca o nickel funzione d'emergenza combinata e permanente

Down wall-light for recess box 503 built-in LED with replaceable buckle white or nikel finish and double emergency function maintain or non-maintain.

IP65

Emergency light

LED SMD

Sorgente luminosa
Light source



Funzione "*Maintain*" sempre accesa
Mantain function always on



Funzione "*Non-maintain*" emergenza
No-mantain function only emergency

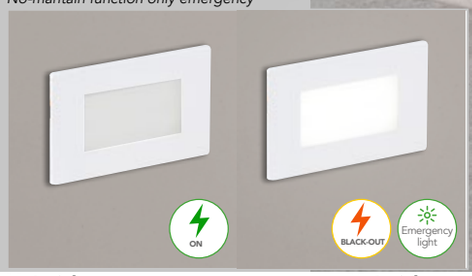

Materiale
Policarbonato + acciaio

Colore
Bianco o nikel

Driver
integrato

Batteria per emergenza
Inclusa Li-ion 3,7V 700 mAh

Sorgente luminosa
LED SMD 3W

Temperatura colore
4000K

Flusso luminoso
200 Lm

Angolo di luce
120°

CRI
>80

Material
Polycarbonate + stainless steel

Colour
White or Nikel

Driver
Built-in

Emergency battery
included Li-ion 3,7V 700 mAh

Light source
LED SMD 3W

Color temperature
4000K

Luminous flux
200 Lm

Beam angle
120°

CRI
>80

INC-BOLT-503HP 8031414866243	3W	200 Lm
	Emergency light	3H 150 Lm

Misure - size
dimensioni in mm - size mm







Scatola derivazione 503 non inclusa
Junction box not included

Accessori inclusi *Accessory included*	2x placchette *frame*	2x staffette *bracket*



nickel
nickel

Bianco
white



HELP 503

Lampade di emergenza LED in policarbonato batteria Li-ion incasso cassetta di derivazione 503.

Emergency LED lamp in PC with Li-ion battery, fit with recess box 503.

Emergency light

LED SMD

Sorgente luminosa
Light source



Materiale
Policarbonato

Colore
Bianco

Driver
integrato

Batteria per emergenza
Inclusa Li-ion 3.7V 700mA

Sorgente luminosa
LED SMD 1W

Temperatura colore
4000K

Flusso luminoso
80 Lm

Angolo di luce
120°

CRI
>80

Material
Polycarbonate

Colour
White

Driver
Built-in

Emergency battery
included Li-ion 3.7V 700mA

Light source
LED SMD 1W

Color temperature
4000K

Luminous flux
80 Lm

Beam angle
120°

CRI
>80

LED-HELP-503 — 1W — 3H 80 Lm
8031414862573

Misure - size
dimensioni in mm - size mm



Foro - cut out
dimensioni in mm - size mm







Scatola derivazione 503 non inclusa
Junction box not included

HELP 511

Lampade di emergenza LED in policarbonato batteria Ni-Cd

Emergency LED lamp in PC with Ni-Cd battery

Emergency light

LED SMD

Sorgente luminosa
Light source

IP40



Materiale
Policarbonato

Colore
Bianco

Driver
integrato

Batteria per emergenza
Inclusa Li-ion 7.4V 1200mA

Sorgente luminosa
LED SMD 4W

Temperatura colore
4000K

Flusso luminoso
180 Lm

Angolo di luce
100°

CRI
>80

Material
Polycarbonate

Colour
White

Driver
Built-in

Emergency battery
included Li-ion 7.4V 1200mA

Light source
LED SMD 4W

Color temperature
4000K

Luminous flux
180 Lm

Beam angle
100°

CRI
>80

LED-HELP-511 — 4W — 3H 180 Lm
8031414862566

Misure - size
dimensioni in mm - size mm



Accessori inclusi
Accessory included

Adesivo - *stickers*





Foro - cut out
Scatola derivazione
recess box hole
dimensioni in mm - size mm





COMPASS

Applique alluminio doppia emissione orientabile colore antracite

Anthracite aluminium wall lamp will double orientable light emission

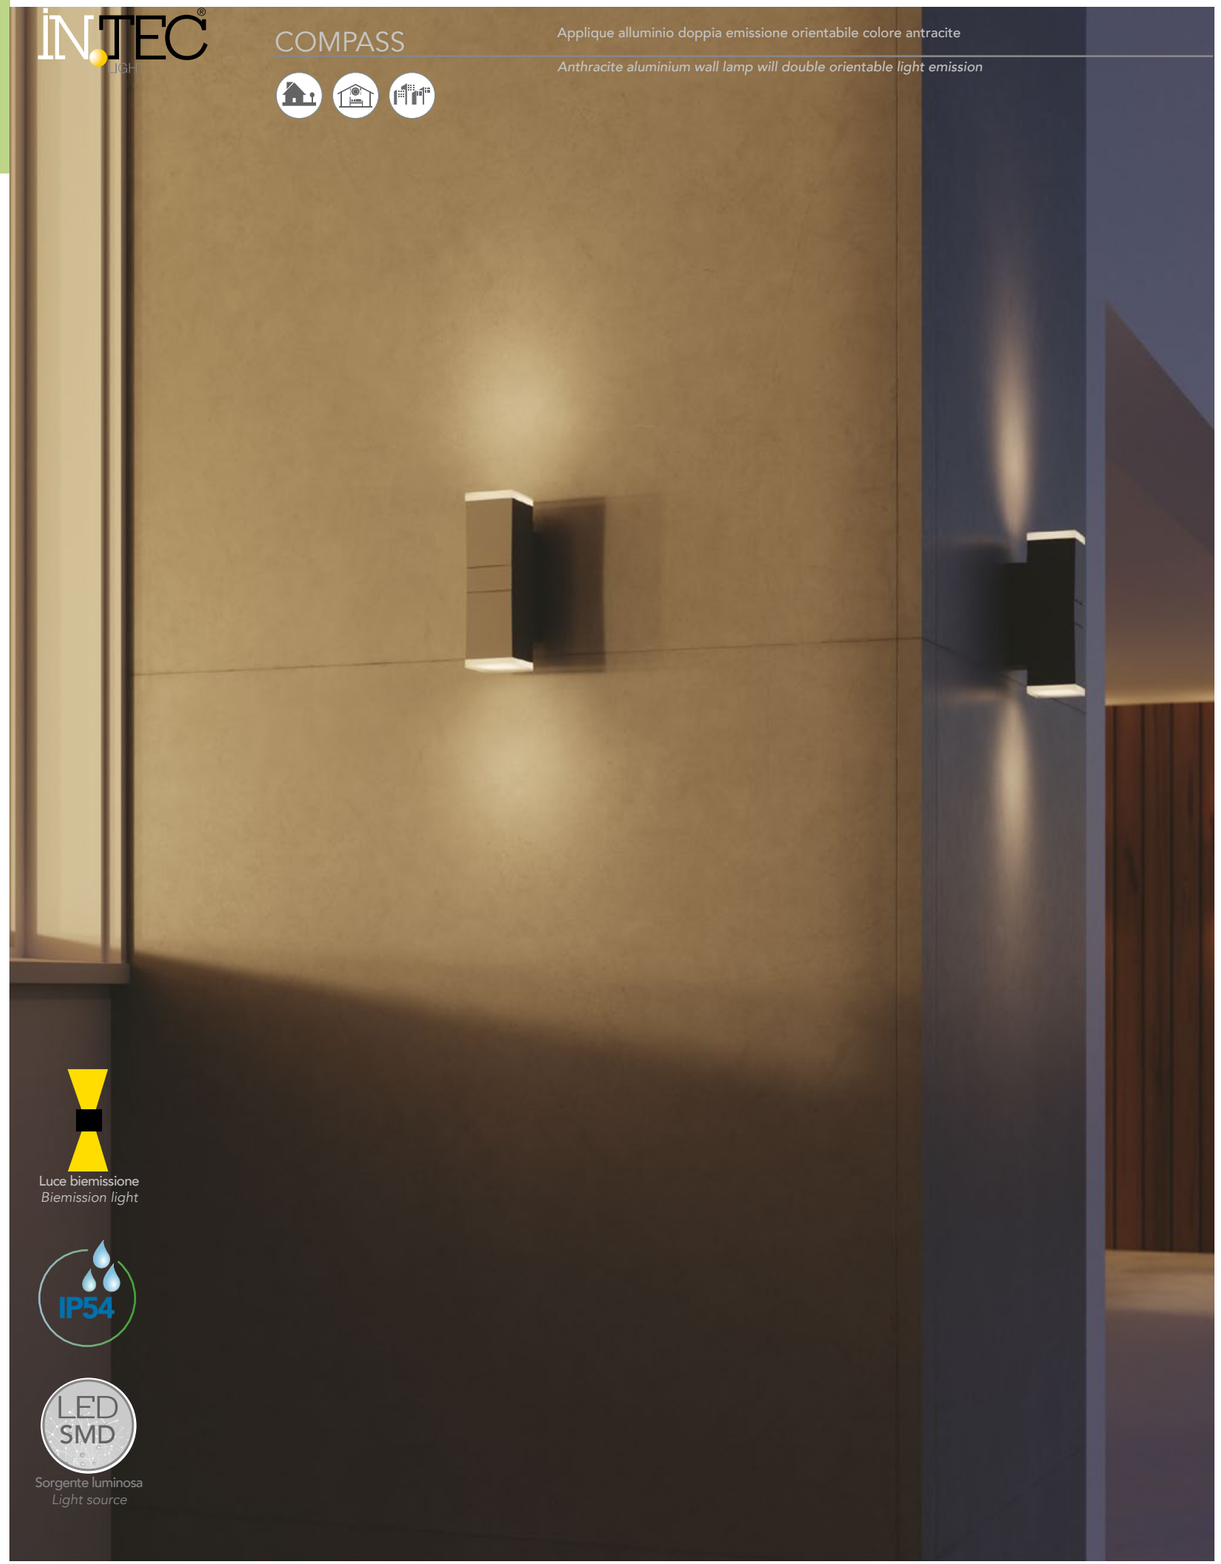

Luce biemissione
Biemission light

IP54

LED SMD
Sorgente luminosa
Light source

SMART INTEC
Wi-Fi

COMPASS

Materiale
Alluminio

Colore
Antracite

Driver
incluso

Sorgente luminosa
LED SMD 10W

Temperatura colore

CCT

Flusso luminoso
470 Lm

Angolo di luce
↑110° + ↓110°

CRI
>80

Grado IK
IK08

Material
Aluminium

Colour
Anthracite

Driver
included

Light source
LED SMD 10W

Color temperature

CCT

Luminous flux
470 Lm

Beam angle
↑110° + ↓110°

CRI
>80

IK degree
IK08

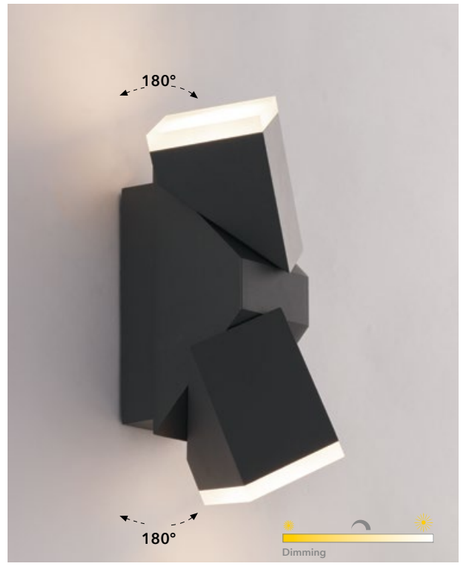

LED-W-COMPASS-INT 8031414870158	10W

Misure
dimensioni in mm





COMPACT

Applique a LED in alluminio colore antracite con diffusore in PC

Anthracite aluminium LED wall lamp and PC diffuser

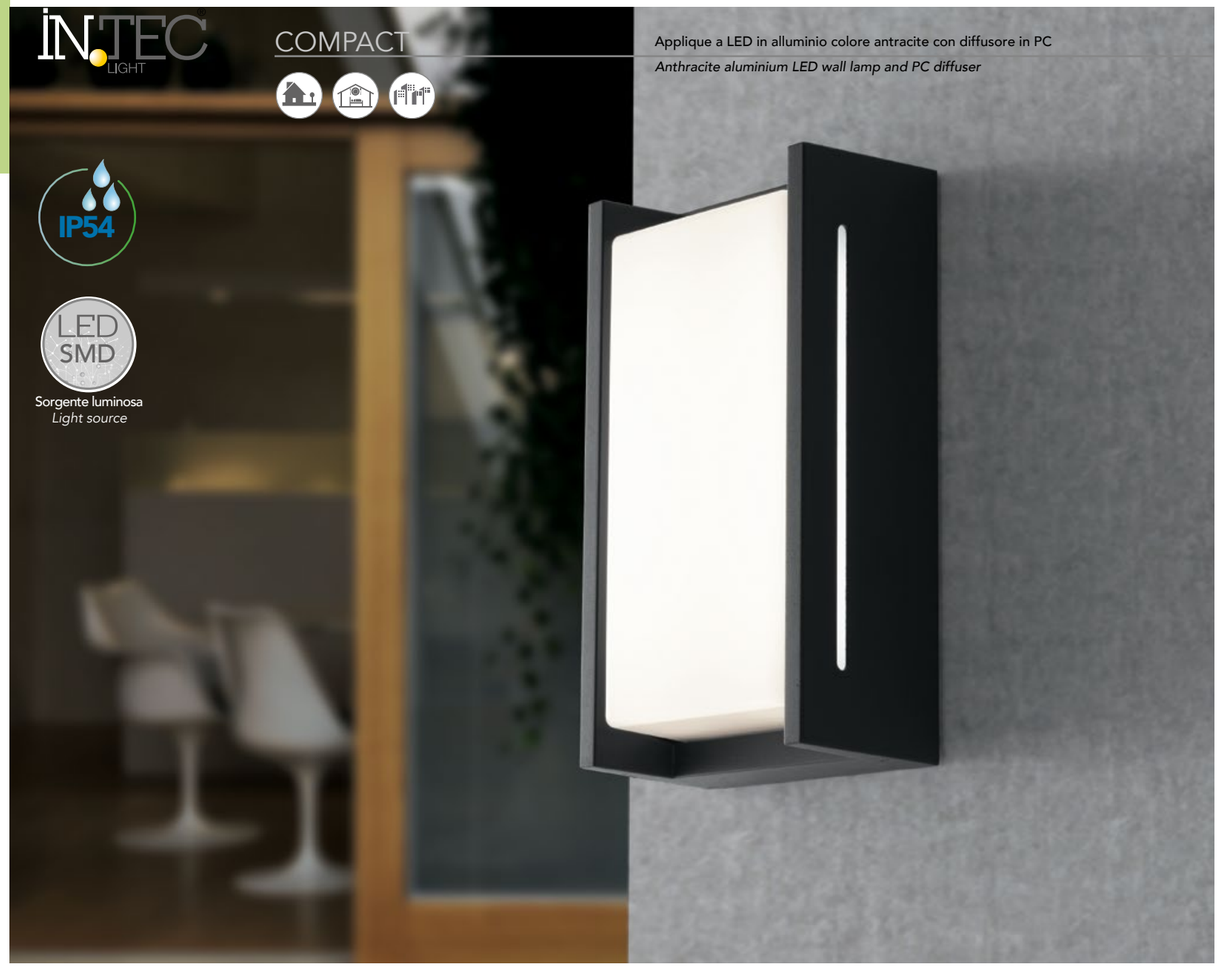

IP54

LED SMD

Sorgente luminosa
Light source



Materiale
Alluminio + policarbonato
Colore
Antracite
Driver
incluso
Sorgente luminosa
LED SMD 18W
Temperatura colore
4000K
Flusso luminoso
1200 Lm
Angolo di luce
120°
CRI
>80
Grado IK
IK07

Material
Aluminium + polycarbonate
Colour
Anthracite
Driver
included
Light source
LED SMD 18W
Color temperature
4000K
Luminous flux
1200 Lm
Beam angle
120°
CRI
>80
IK degree
IK07

LED-W-COMPACT **18W**
8031414867110

Misure - size
dimensioni in mm - size mm



DETROIT

Applique a LED in alluminio nero diffusore in policarbonato

Aluminium LED wall lamp black finish with PC shade

IP54

LED SMD

Sorgente luminosa
Light source



Materiale
Alluminio + policarbonato
Colore
Nero
Driver
incluso
Sorgente luminosa
LED SMD 10W
Temperatura colore
4000K
Flusso luminoso
700 Lm
Angolo di luce
120°
CRI
>80
Grado IK
IK07

Material
Aluminium + polycarbonate
Colour
Black
Driver
included
Light source
LED SMD 10W
Color temperature
4000K
Luminous flux
700 Lm
Beam angle
120°
CRI
>80
IK degree
IK07

LED-W-DETROIT-AP **10W**
8031414862290

Misure - size
dimensioni in mm - size mm



AMON

Applique a LED in alluminio goffrato bianco o nero

Aluminium LED wall lamp embossed white or black finish

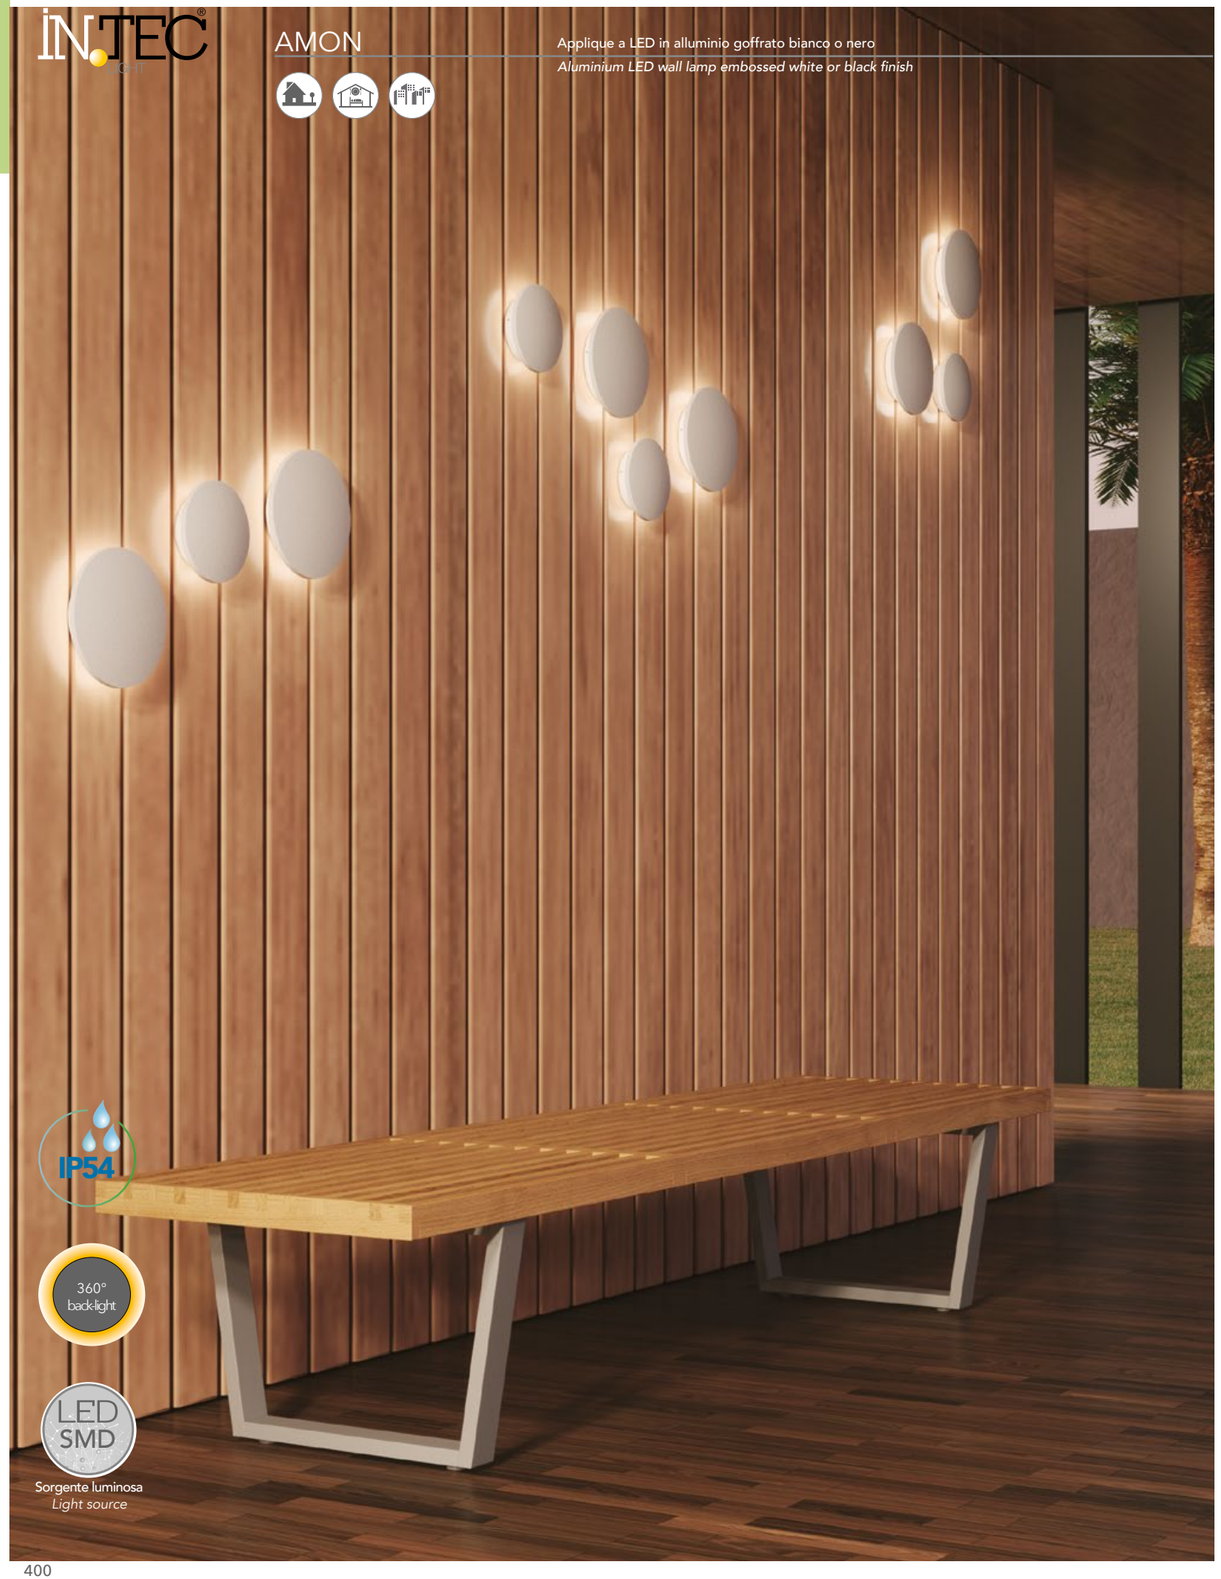

Sorgente luminosa

Light source

AMON

Materiale
Alluminio

Colore
Goffrato bianco - goffrato nero

Driver
incluso

Sorgente luminosa
LED SMD 6W - 9W

Temperatura colore
3000K - 4000K

Flusso luminoso
360Lm - 540Lm

Angolo di luce
360° backlight

CRI
>80

Grado IK
IK08

Material
Aluminium

Colour
Embossed white - embossed black

Driver
included

Light source
LED SMD 6W - 9W

Color temperature
3000K - 4000K

Luminous flux
360Lm - 540Lm

Beam angle
360° backlight

CRI
>80

IK degree
IK08



LED-W-AMON-S NERO 8031414866939		6W - 360 Lm
LED-W-AMON-S BCO 8031414866946		6W - 360 Lm
LED-W-AMON-SC BCO 8031414876723		6W - 360 Lm

Misure - size
dimensioni in mm - size mm





LED-W-AMON-M NERO 8031414867158		9W - 540 Lm
LED-W-AMON-M BCO 8031414867165		9W - 540 Lm
LED-W-AMON-MC BCO 8031414876709		9W - 540 Lm

Misure - size
dimensioni in mm - size mm



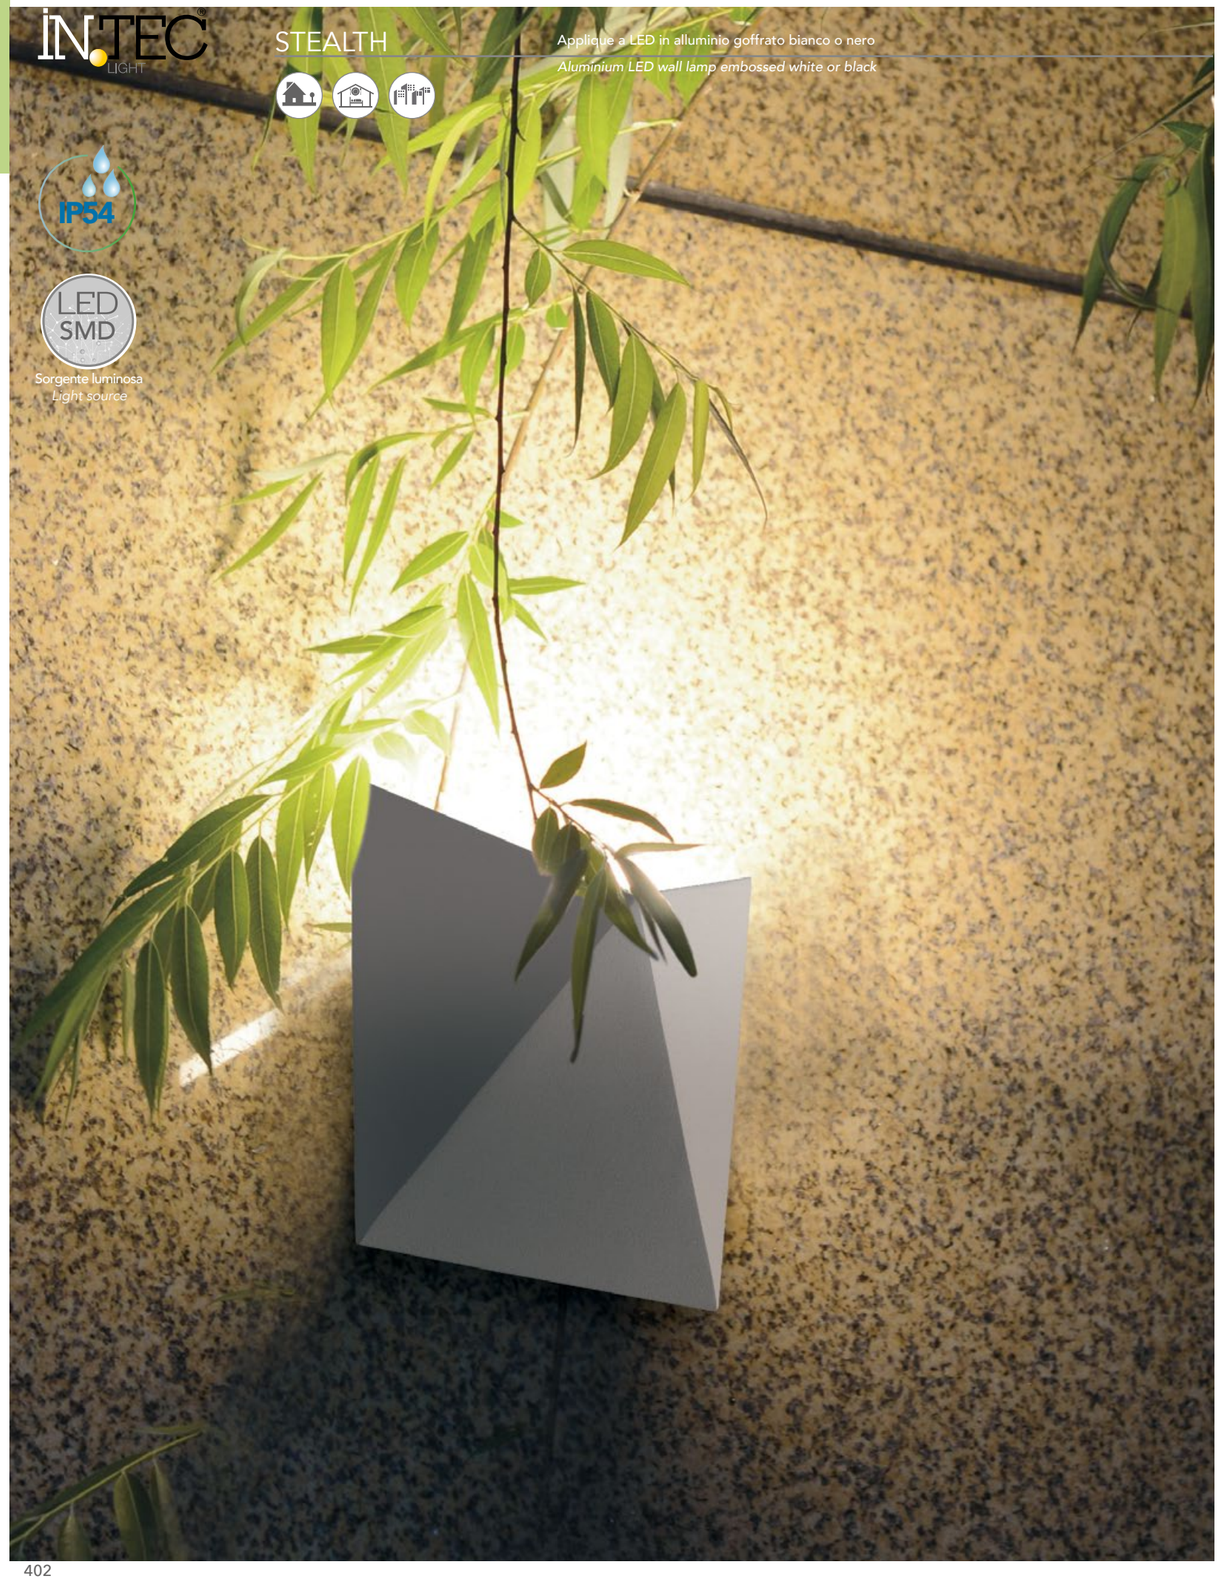

STEALTH

Materiale	**Material**
Alluminio	Aluminium
Colore	**Colour**
Goffrato bianco - goffrato nero	*Embossed white - embossed black*
Driver	**Driver**
incluso	included
Sorgente luminosa	**Light source**
LED SMD 7W	LED SMD 7W
Temperatura colore	**Color temperature**
4000K	4000K
Flusso luminoso	**Luminous flux**
420 Lm	420 Lm
Angolo di luce	**Beam angle**
120°	120°
CRI	**CRI**
>80	>80
Grado IK	**IK degree**
IK07	IK07

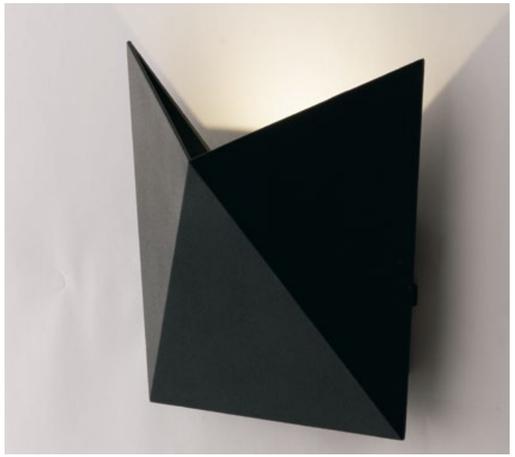

LED-W-STEALTH NER
8031414866953
7W

Misure - size
dimensioni in mm - size mm



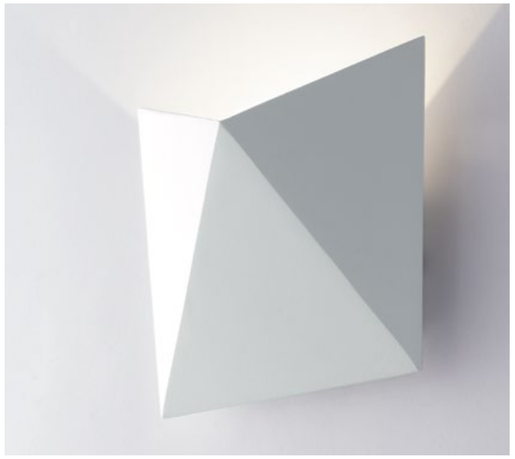

LED-W-STEALTH BCO
8031414866960
7W

Misure - size
dimensioni in mm - size mm



APPLIQUE PER ESTERNI / *OUTDOOR WALL LAMP*

MERCURY

Applique a LED in alluminio bianco goffrato

Aluminium LED wall lamp embossed white finish

Luce biemissione
Biemission light

LED SMD
Sorgente luminosa
Light source

IP54





Materiale
Alluminio
Colore
Goffrato bianco

Driver
incluso

Sorgente luminosa
LED SMD 6W

Temperatura colore
3000K

Flusso luminoso
630 Lm

Angolo di luce
↑120° + ↓120°

CRI
>80

Grado IK
IK07

Material
Aluminium
Colour
Embossed white

Driver
included

Light source
LED SMD 6W

Color temperature
3000K

Luminous flux
630 Lm

Beam angle
↑120° + ↓120°

CRI
>80

IK degree
IK07

LED-W-MERCURY/5W **6W**
8031434091212

Misure - size
dimensioni in mm - size mm



GAMMA

Applique a LED in alluminio goffrato bianco

Aluminium LED wall lamp embossed white finish

Luce biemissione
Biemission light

LED SMD
Sorgente luminosa
Light source

IP54

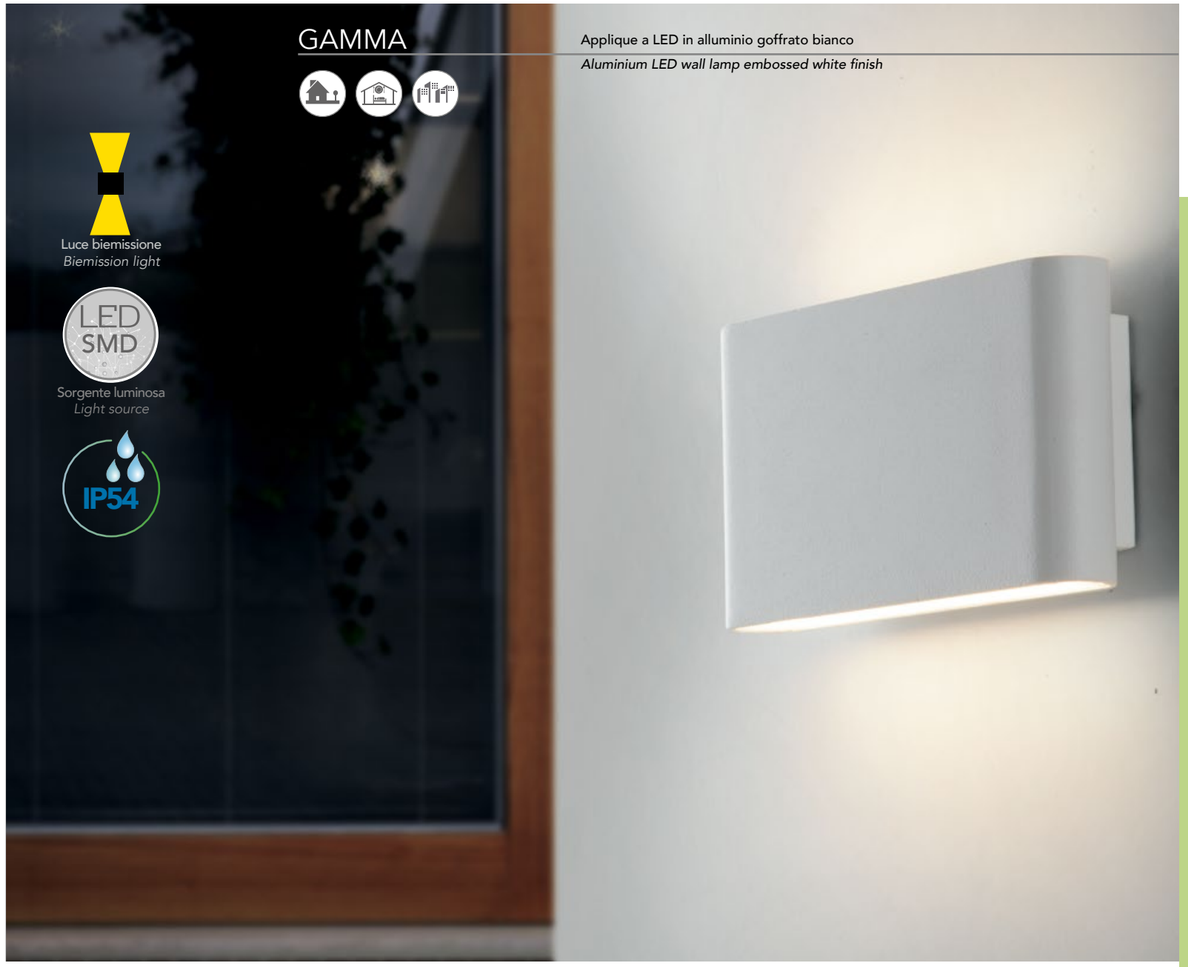



Materiale
Alluminio
Colore
Goffrato bianco

Driver
incluso

Sorgente luminosa
LED SMD 2X5W

Temperatura colore
3000K

Flusso luminoso
1080 Lm

Angolo di luce
↑120° + ↓120°

CRI
>80

Grado IK
IK07

Material
Aluminium
Colour
Embossed white

Driver
included

Light source
LED SMD 2X5W

Color temperature
3000K

Luminous flux
1080 Lm

Beam angle
↑120° + ↓120°

CRI
>80

IK degree
IK07

LED-W-GAMMA/10W **2X5W**
8031434041217

Misure - size
dimensioni in mm - size mm



MIURA

Applique a LED in alluminio bianco goffrato ultrasottile

Ultraslim aluminium LED wall lamp

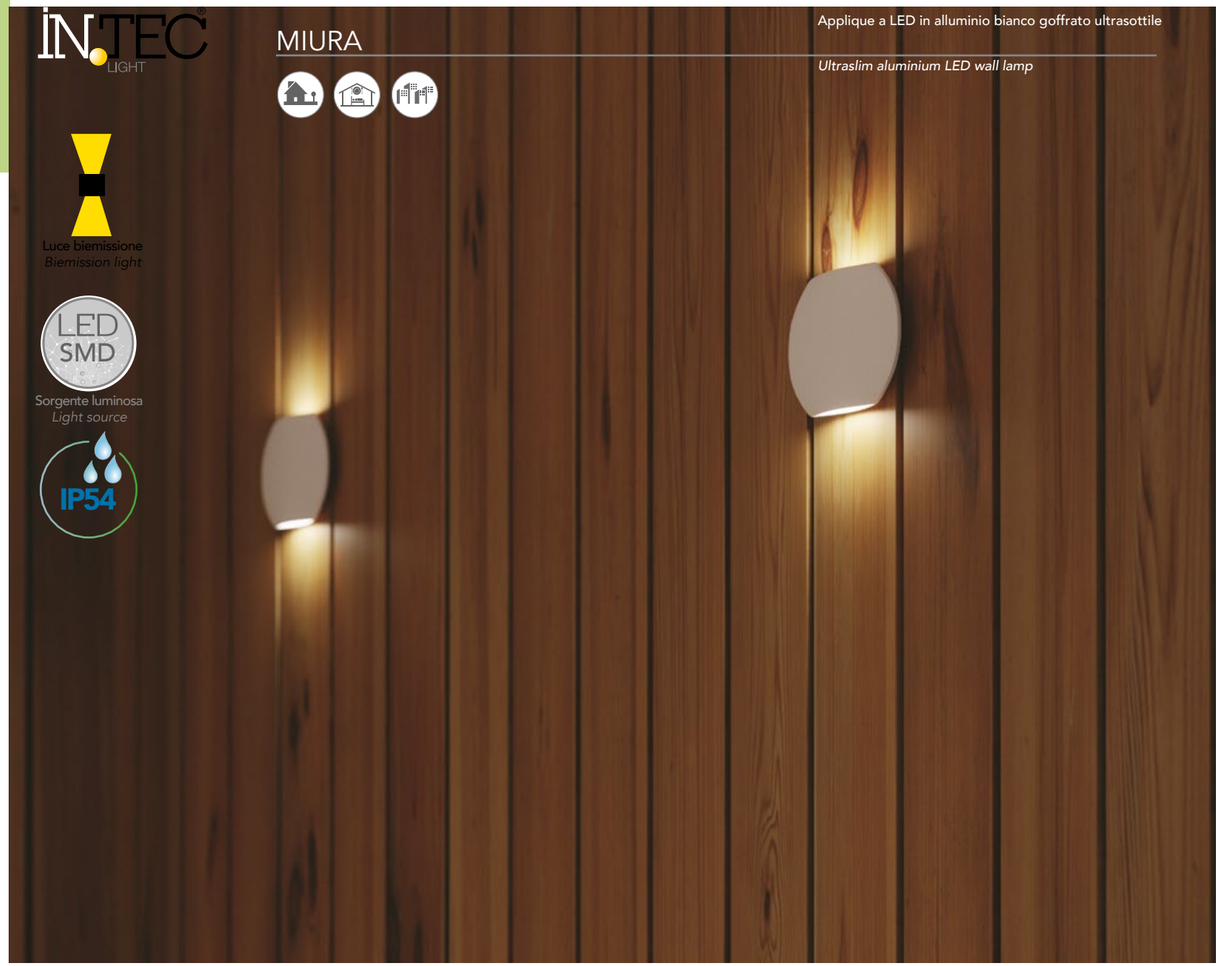

Luce biemissione
Biemission light

LED SMD
Sorgente luminosa
Light source

IP54



Materiale
Alluminio
Colore
Goffrato bianco

Driver
incluso

Sorgente luminosa
LED SMD 2X3W

Temperatura colore
3000K

Flusso luminoso
520 Lm

Angolo di luce
↑110° + ↓110°

CRI
>80

Grado IK
IK07

Material
Aluminium
Colour
Embossed white

Driver
included

Light source
LED SMD 2X3W

Color temperature
3000K

Luminous flux
520 Lm

Beam angle
↑110° + ↓110°

CRI
>80

IK degree
IK07

LED-W-MIURA/6W **2X3W**
8031440351447

Misure - size
dimensioni in mm - size mm



CE EMC

TUNNEL

Applique a LED in alluminio colore antracite diffusore in policarbonato

Aluminium LED wall lamp anthracite colour, shade in PC

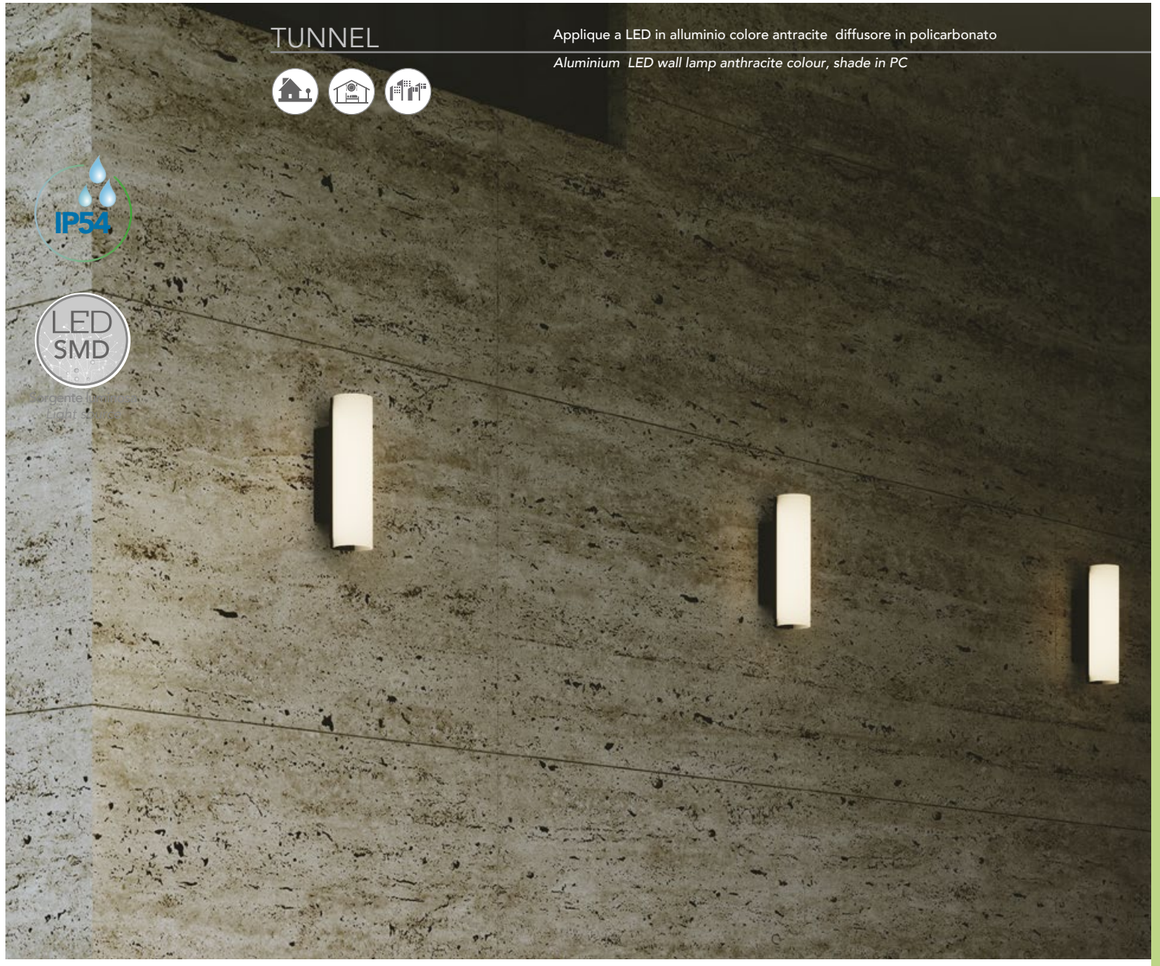

IP54

LED SMD



Materiale
Alluminio + policarbonato
Colore
Antracite e bianco latte

Driver
incluso

Sorgente luminosa
LED SMD 12W

Temperatura colore
4000K

Flusso luminoso
800 Lm

Angolo di luce
120°

CRI
>80

Grado IK
IK07

Material
Aluminium + polycarbonate
Colour
Anthracite

Driver
included

Light source
LED SMD 12W

Color temperature
4000K

Luminous flux
800 Lm

Beam angle
120°

CRI
>80

IK degree
IK07

LED-W-TUNNEL **12W**
8031414863556

Misure - size
dimensioni in mm - size mm



CE EMC

VEYRON

Applique a LED in alluminio goffrato bianco o nero

Aluminium LED wall lamp embossed white or black finish

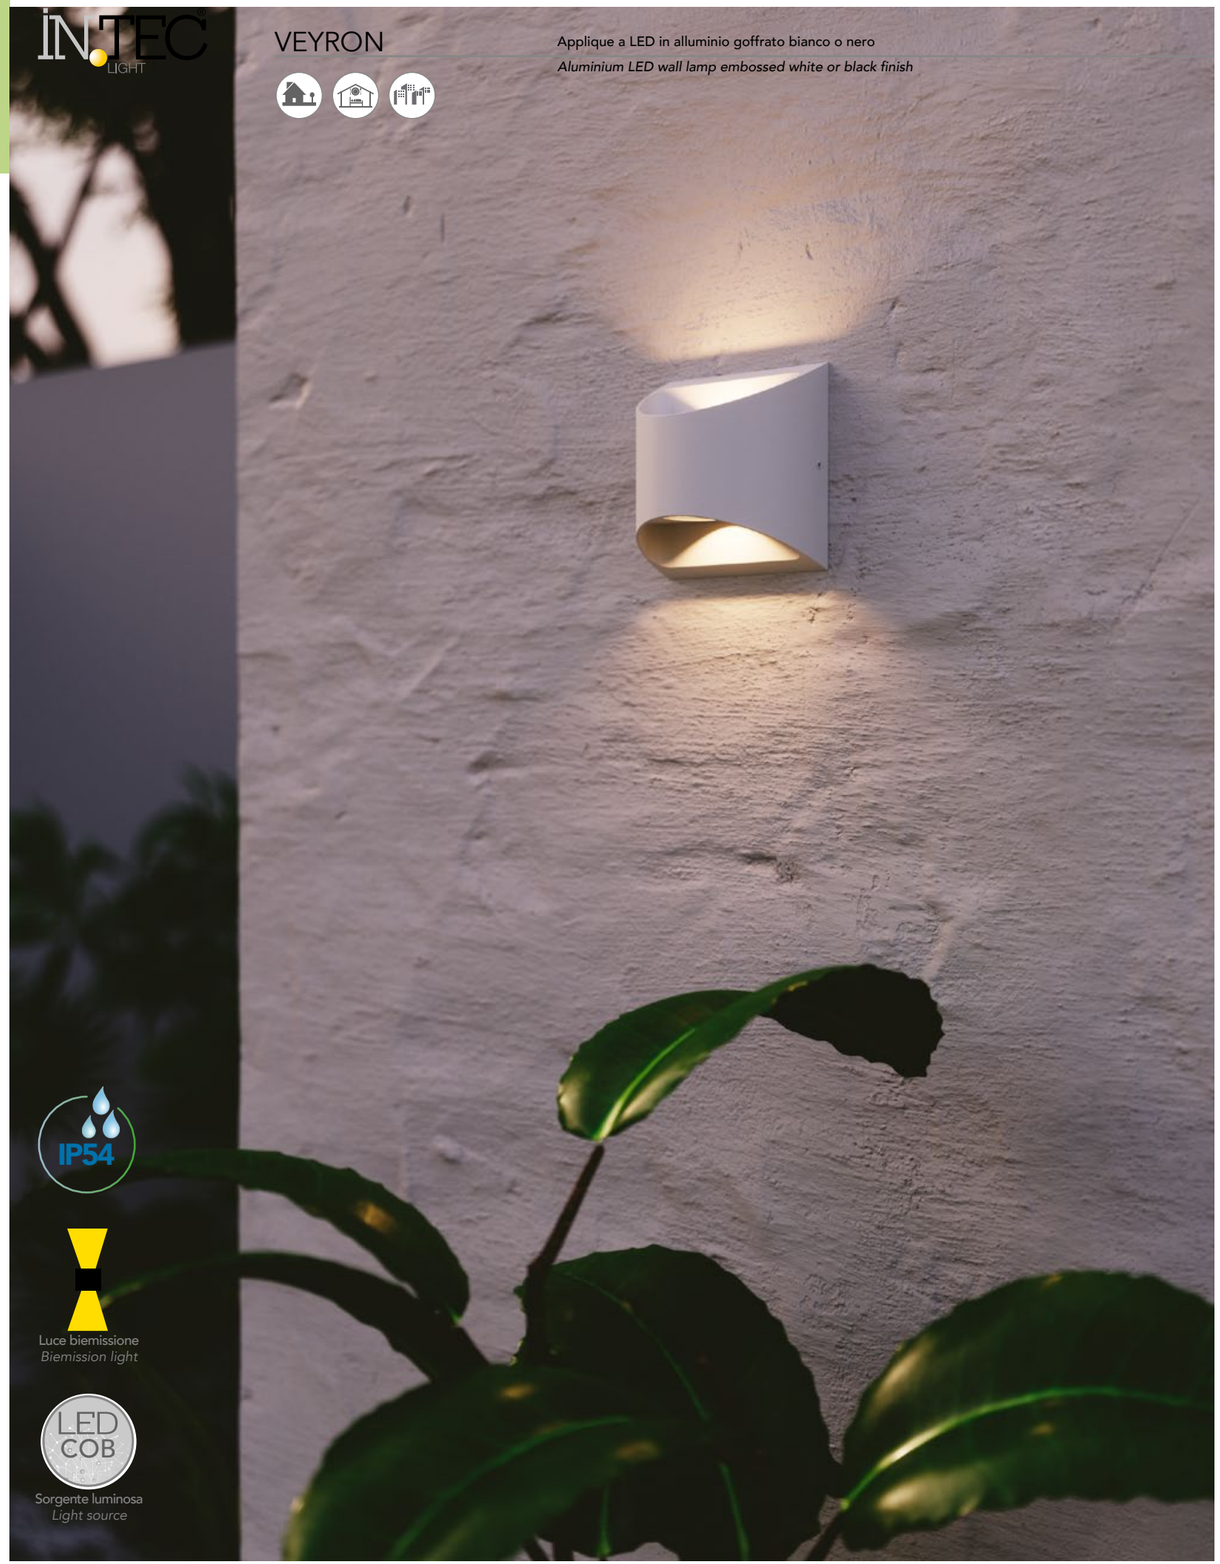

Materiale
Alluminio

Colore
Goffrato bianco - goffrato nero

Driver
incluso

Sorgente luminosa
LED COB 2X3,5W

Temperatura colore
4000K

Flusso luminoso
522 Lm

Angolo di luce
↑120° + ↓120°

CRI
>85

Grado IK
IK07

Material
Aluminium

Colour
Embossed white - embossed black

Driver
included

Light source
LED COB 2X3,5W

Temperatura colore
4000K

Luminous flux
522 Lm

Beam angle
↑120° + ↓120°

CRI
>85

IK degree
IK07



LED-W-VEYRON NERO **2X3,5W**
8031440361095

Misure - size
dimensioni in mm - size mm





LED-W-VEYRON BCO **2X3,5W**
8031440361163

Misure - size
dimensioni in mm - size mm



BIOME

Applique a LED in alluminio goffrato bianco o nero

Aluminium LED wall lamp embossed white or black finish

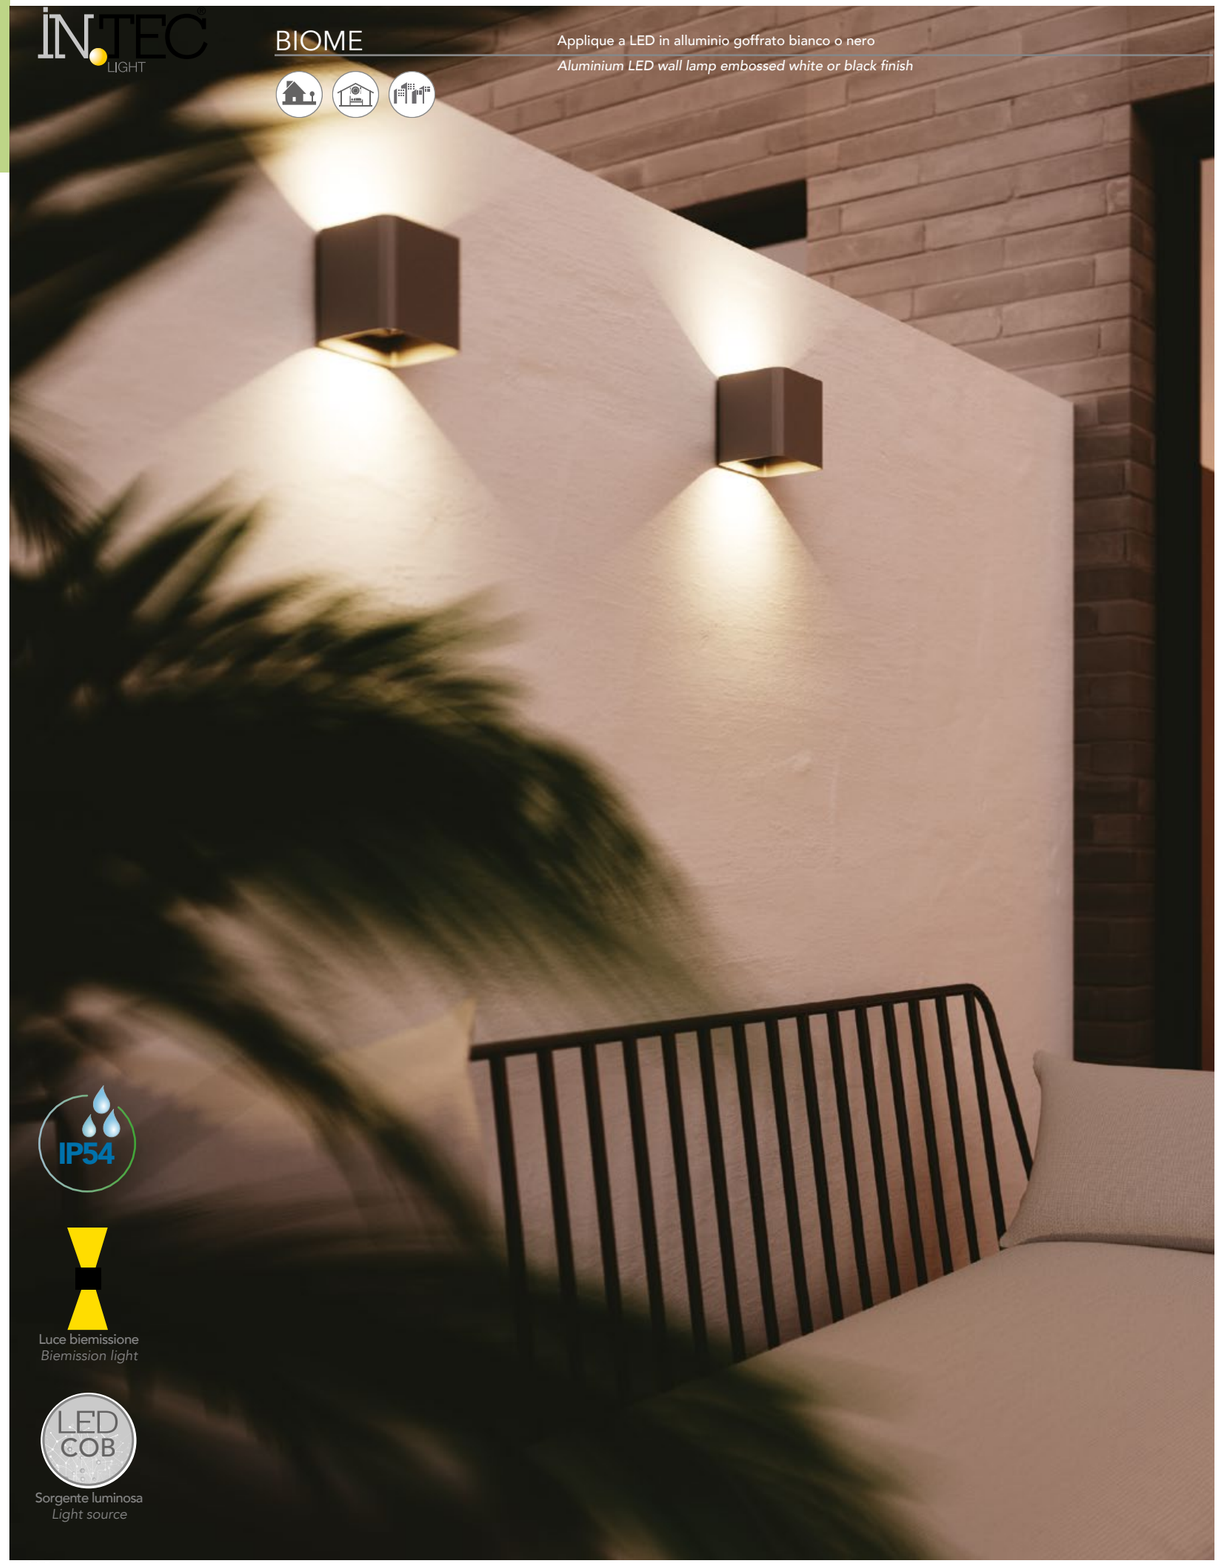

IP54

Luce biemissione
Biemission light

LED COB

Sorgente luminosa
Light source

Materiale
Alluminio

Colore
Goffrato bianco - goffrato nero

Driver
incluso

Sorgente luminosa
LED COB 2X3,5W

Temperatura colore
4000K

Flusso luminoso
540 Lm

Angolo di luce
↑120° + ↓120°

CRI
>85

Grado IK
IK07

Material
Aluminium

Colour
Embossed white - embossed black

Driver
included

Light source
LED COB 2X3,5W

Color temperature
4000K

Luminous flux
540 Lm

Beam angle
↑120° + ↓120°

CRI
>85

IK degree
IK07



LED-W-BIOME NERO
8031440361132 **2X3,5W**

Misure - size
dimensioni in mm - size mm





LED-W-BIOME BCO
8031440361125 **2X3,5W**

Misure - size
dimensioni in mm - size mm



CE EMC

GOLF

Applique a LED in alluminio goffrato bianco o nero

Aluminium LED wall lamp embossed white or black finish

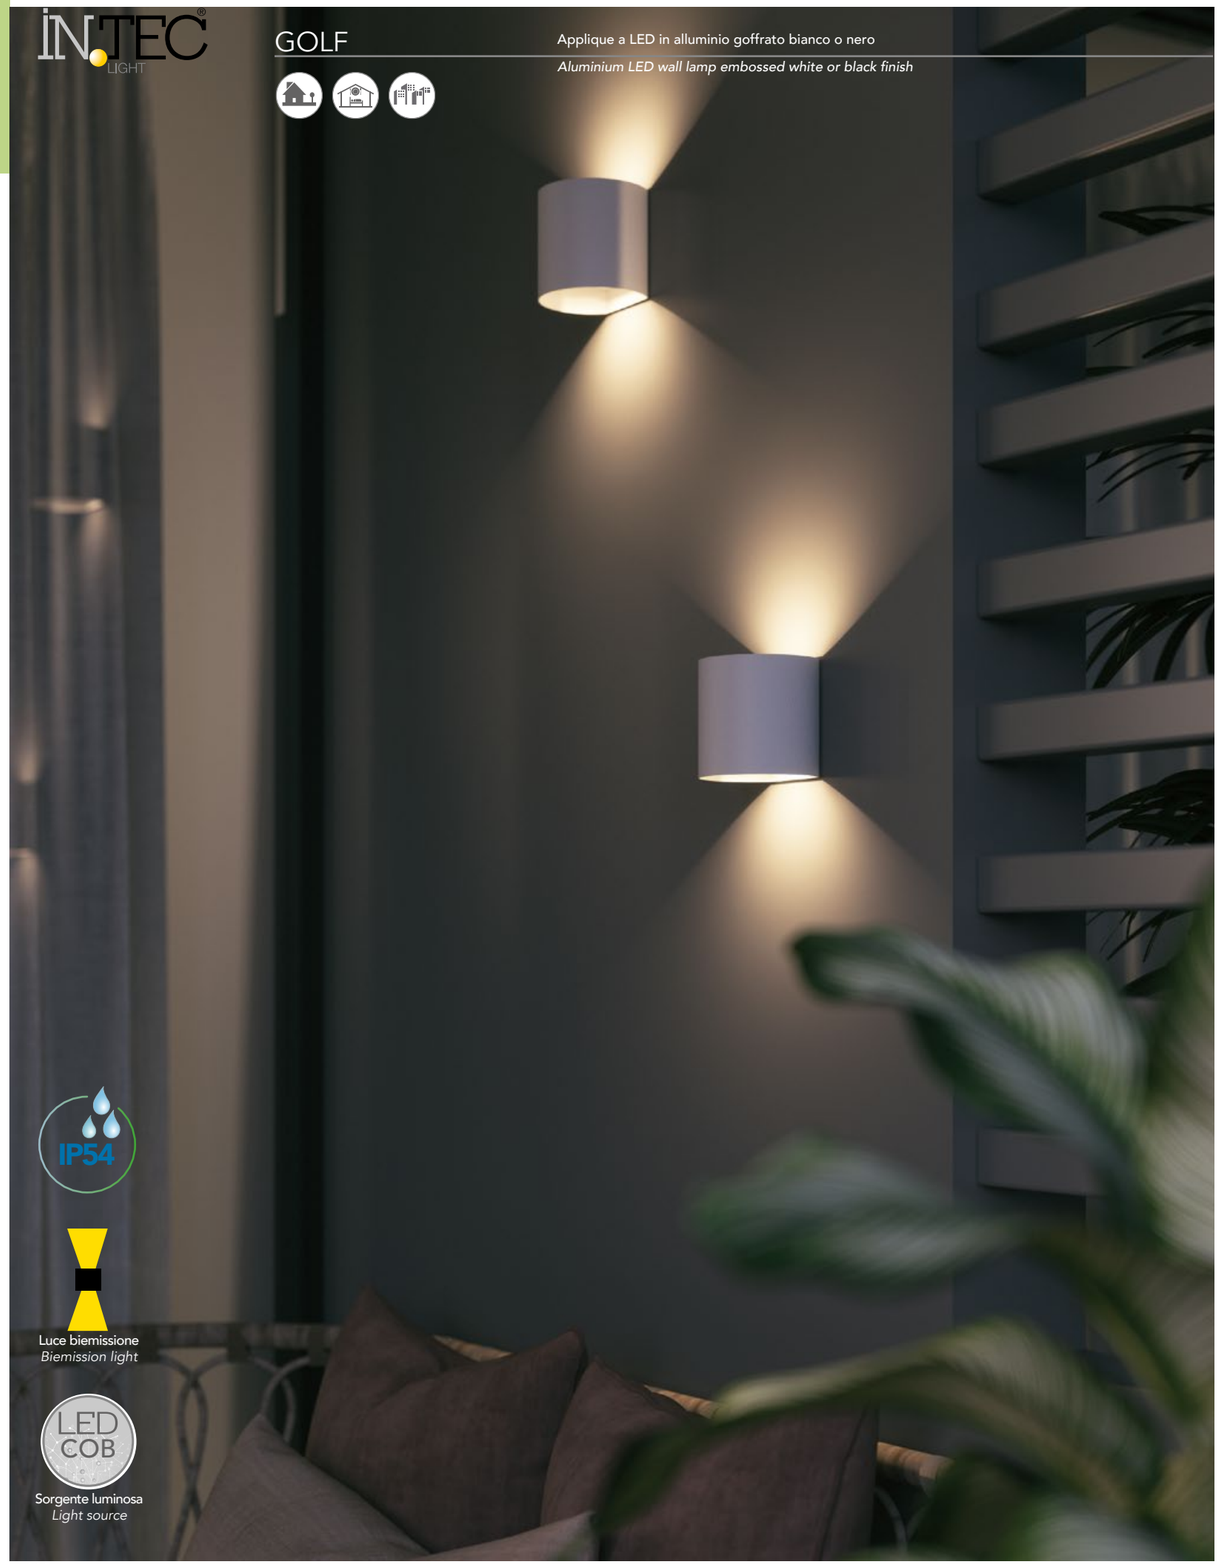

IP54

Luce biemissione
Biemission light

LED COB

Sorgente luminosa
Light source

Materiale
Alluminio
Colore
Goffrato bianco - goffrato nero

Material
Aluminium
Colour
Embossed white - embossed black

Driver
incluso

Driver
included

Sorgente luminosa
LED COB 2X3,5W

Light source
LED COB 2X3,5W

Temperatura colore
4000K

Color temperature
4000K

Flusso luminoso
540 Lm

Luminous flux
540 Lm

Angolo di luce
↑120° + ↓120°

Beam angle
↑120° + ↓120°

CRI
>85

CRI
>85

Grado IK
IK07

IK degree
IK07



LED-W-GOLF NERO **2X3,5W**
8031440361118

Misure - size
dimensioni in mm - size mm





LED-W-GOLF BCO **2X3,5W**
8031440361101

Misure - size
dimensioni in mm - size mm



CE EMC

RAY

Applique a LED in alluminio biemissione più emissione frontale in antracite e corten goffrato

Aluminium LED wall lamp double emitting light and front light stream embossed anthracite or corten finish

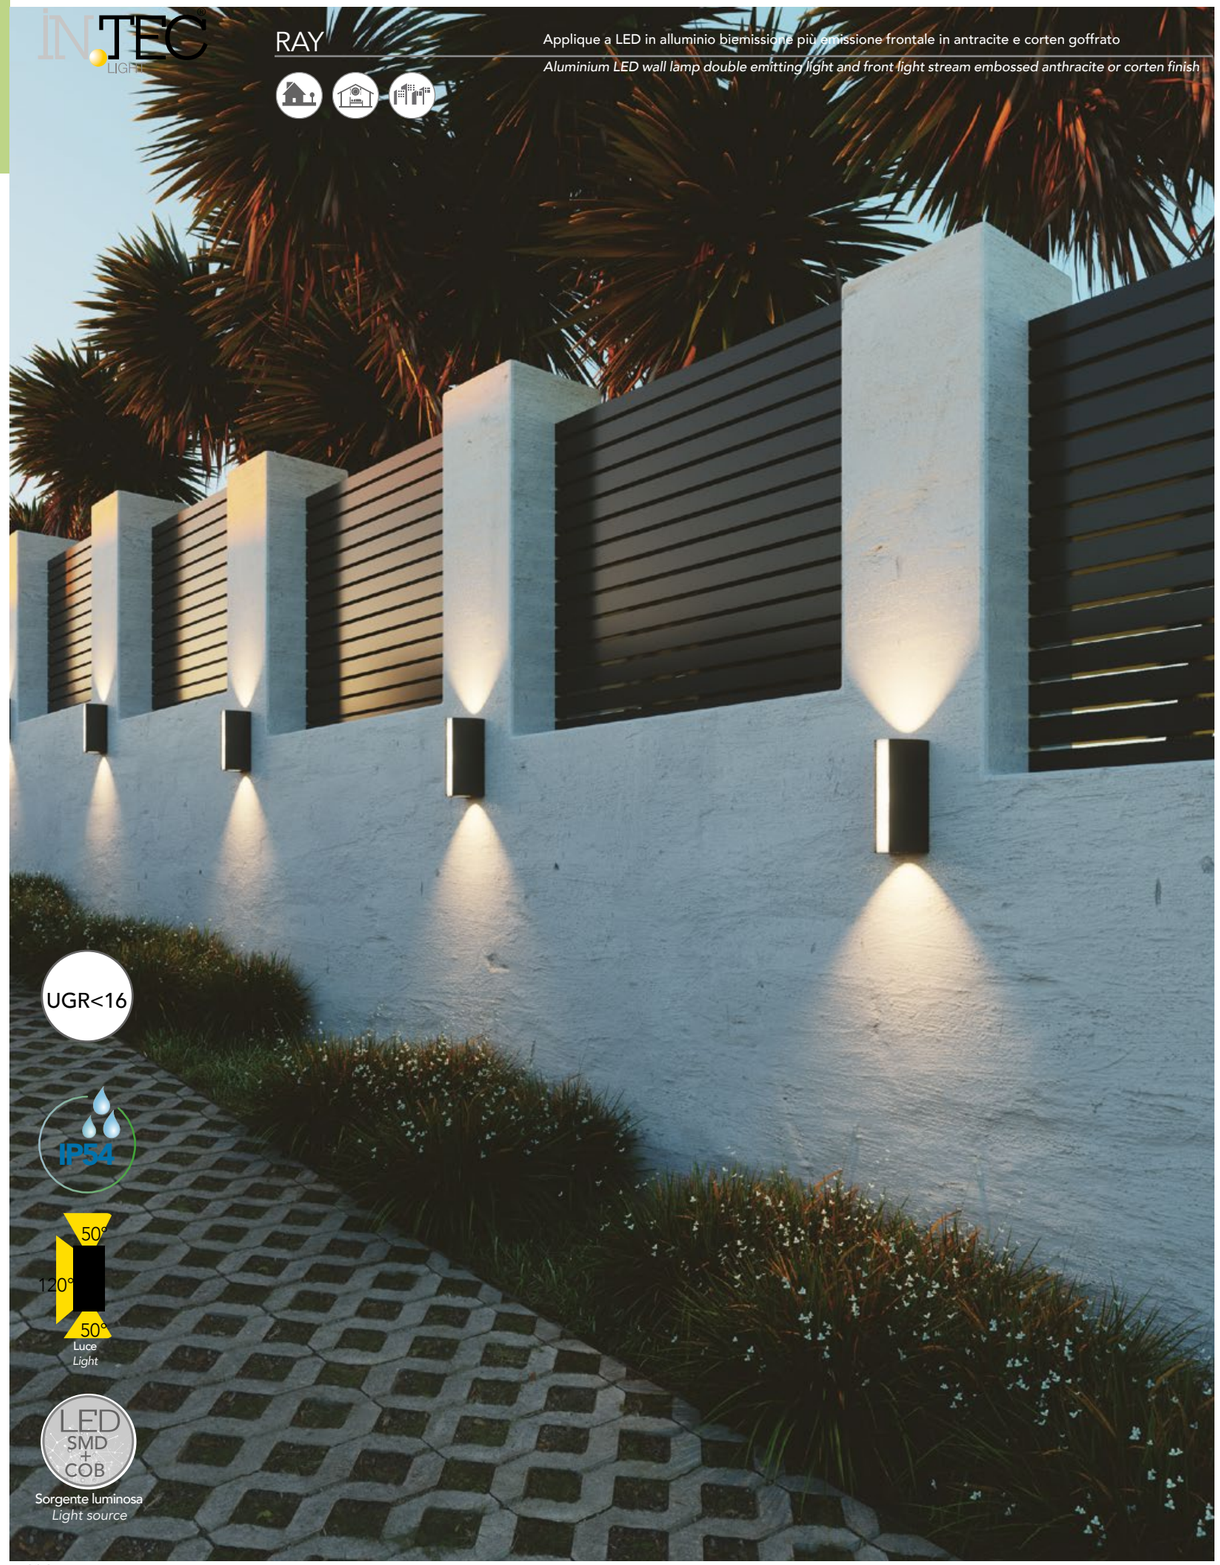

Materiale
Alluminio

Colore
Goffrato antracite - goffrato corten

Driver
incluso

Sorgente luminosa
LED SMD+COB 14W

Temperatura colore
4000K

Flusso luminoso
890 Lm

Angolo di luce
↑50° + ↓50° + →120°

CRI
>80

Grado IK
IK10

Material
Aluminium

Colour
Embossed anthracite - embossed corten

Driver
included

Light source
LED SMD+COB 14W

Color temperature
4000K

Luminous flux
890 Lm

Beam angle
↑50° + ↓50° + →120°

CRI
>80

IK degree
IK10



LED-W-RAY ANT
8031414867127 **14W**

Misure - size
dimensioni in mm - size mm





LED-W-RAY BRO
8031414870998 **14W**

Misure - size
dimensioni in mm - size mm



CE EMC

TWIN

Applique bi-emissione a LED in alluminio finitura antracite, bianco o nickel spazzolato

Double emission aluminium LED wall lamp anthracite, white or brush nickel finish



Materiale
Alluminio

Colore
Antracite - bianco - nickel spazzolato

Driver
incluso

Sorgente luminosa
LED SMD 12W - 20W - 40W

Temperatura colore
4000K

Flusso luminoso
900 Lm - 1250 Lm - 3000 Lm

Angolo di luce
↑90° + ↓90°

CRI
>80

UGR
<16

Grado IK
IK06

Material
Aluminium

Colour
Anthracite - white - brush nickel

Driver
included

Light source
LED SMD 12W - 20W - 40W

Color temperature
4000K

Luminous flux
900 Lm - 1250 Lm - 3000 Lm

Beam angle
↑90° + ↓90°

CRI
>80

UGR
<16

IK degree
IK06



LED-W-TWIN-XL ANT 8031414863686		**40W - 3000 Lm**
LED-W-TWIN-XL NIK 8031414864362		**40W - 3000 Lm**
LED-W-TWIN-XL BCO 8031414863716		**40W - 3000 Lm**

Misure - size
dimensioni in mm - size mm



LED-W-TWIN-M ANT 8031414863693		**20W - 1250 Lm**
LED-W-TWIN-M NIK 8031414863990		**20W - 1250 Lm**
LED-W-TWIN-M BCO 8031414863969		**20W - 1250 Lm**

Misure - size
dimensioni in mm - size mm





LED-W-TWIN-S ANT 8031414863709		**12W - 900 Lm**
LED-W-TWIN-S NIK 8031414863983		**12W - 900 Lm**
LED-W-TWIN-S BCO 8031414863976		**12W - 900 Lm**

Misure - size
dimensioni in mm - size mm



BORDER

Applique angolare a LED in PC antracite o bianco matto con diffusore in PC

Angular PC LED wall lamp matt anthracite or white finish and PC diffuser



BORDER

Materiale
PC
Colore
Bianco matto - Antracite matto
Driver
incluso
Sorgente luminosa
LED SMD 30W
Temperatura colore
4000K
Flusso luminoso
2700 Lm
Angolo di luce
120°
CRI
>80
Grado IK
IK10

Material
PC
Colour
Matt white - matt anthracite
Driver
included
Light source
LED SMD 30W
Color temperature
4000K
Luminous flux
2700 Lm
Beam angle
120°
CRI
>80
IK degree
IK10



LED-BORDER-30M-ANT
8031414883561
30W

Misure - size
dimensioni in mm - size mm





LED-BORDER-30M-BCO
8031414883578
30W

Misure - size
dimensioni in mm - size mm

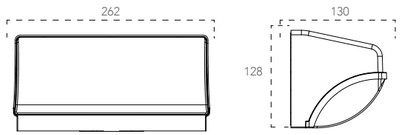

LUXON

Applique angolare a LED in alluminio antracite o bianco goffrato con diffusore in PC

Angular aluminium LED wall lamp embossed anthracite or white finish and PC diffuser







Materiale
Alluminio

Colore
Goffrato bianco - goffrato antracite

Driver
incluso

Sorgente luminosa
LED SMD 12W

Temperatura colore
4000K

Flusso luminoso
750 Lm

Angolo di luce
120°

CRI
>80

UGR
<16

Grado IK
IK10

Material
Aluminium

Colour
Embossed white - embossed anthracite

Driver
included

Light source
LED SMD 12W

Color temperature
4000K

Luminous flux
750 Lm

Beam angle
120°

CRI
>80

UGR
<16

IK degree
IK10

LED-W-LUXON ANT 8031414867097	12W

Misure - size
dimensioni in mm - size mm



LED-W-LUXON BCO 8031414870677	12W

Misure - size
dimensioni in mm - size mm



AGERA

Applique a LED in alluminio nero goffrato

Aluminium LED wall lamp embossed black finish

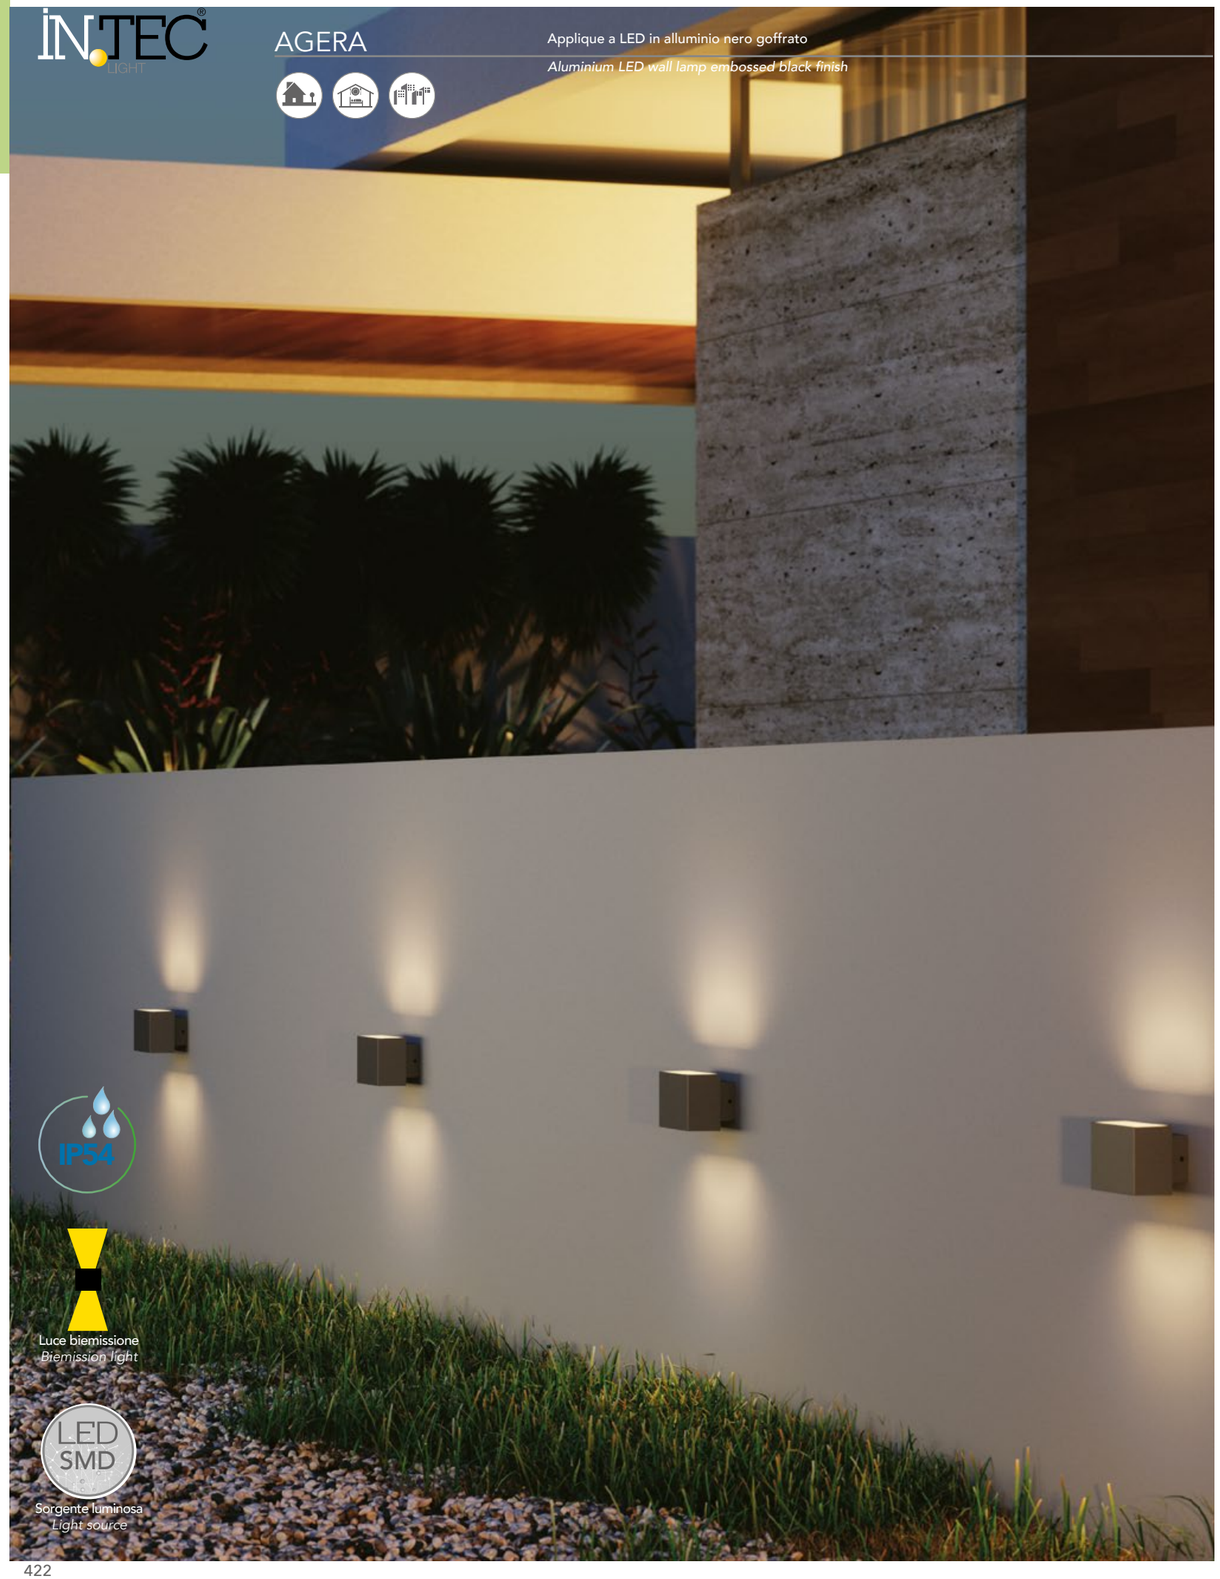

Materiale
Alluminio

Colore
Goffrato nero

Sorgente luminosa
LED SMD 2X3W - 2X8W

Driver
incluso

Temperatura colore
4000K

Flusso luminoso
340 Lm - 550 Lm

Angolo di luce
↑120° + ↓120°

CRI
>80

Grado IK
IK06

Material
Aluminium

Colour
Embossed black

Light source
LED SMD 2X3W - 2X8W

Driver
included

Color temperature
4000K

Luminous flux
340 Lm - 550 Lm

Beam angle
↑120° + ↓120°

CRI
>80

IK degree
IK06



LED-W-AGERA-90
8031440360951
2X3W - 340 Lm

Misure - size
dimensioni in mm - size mm



LED-W-AGERA-180
8031440360975
2X8W - 550 Lm

Misure - size
dimensioni in mm - size mm



EMC

DEZIR

Applique a LED in alluminio nero goffrato

Aluminium LED wall lamp embossed black finish



Luce biemissione
Biemission light

LED COB
Sorgente luminosa
Light source

IP54



Materiale
Alluminio
Colore
Goffrato nero

Material
Aluminium
Colour
Embossed black

Driver
incluso

Driver
included

Sorgente luminosa
LED COB 2X6W

Light source
LED COB 2X6W

Temperatura colore
4000K

Color temperature
4000K

Flusso luminoso
630 Lm

Luminous flux
630 Lm

Angolo di luce
↑120° + ↓120°

Beam angle
↑120° + ↓120°

CRI
>80

CRI
>80

Grado IK
IK07

IK degree
IK07

LED-W-DEZIR 8031440360999	**2X6W**

Misure - size
dimensioni in mm - size mm



CE EMC

ZONDA

Applique a LED in alluminio nero goffrato

Aluminium LED wall lamp embossed black finish

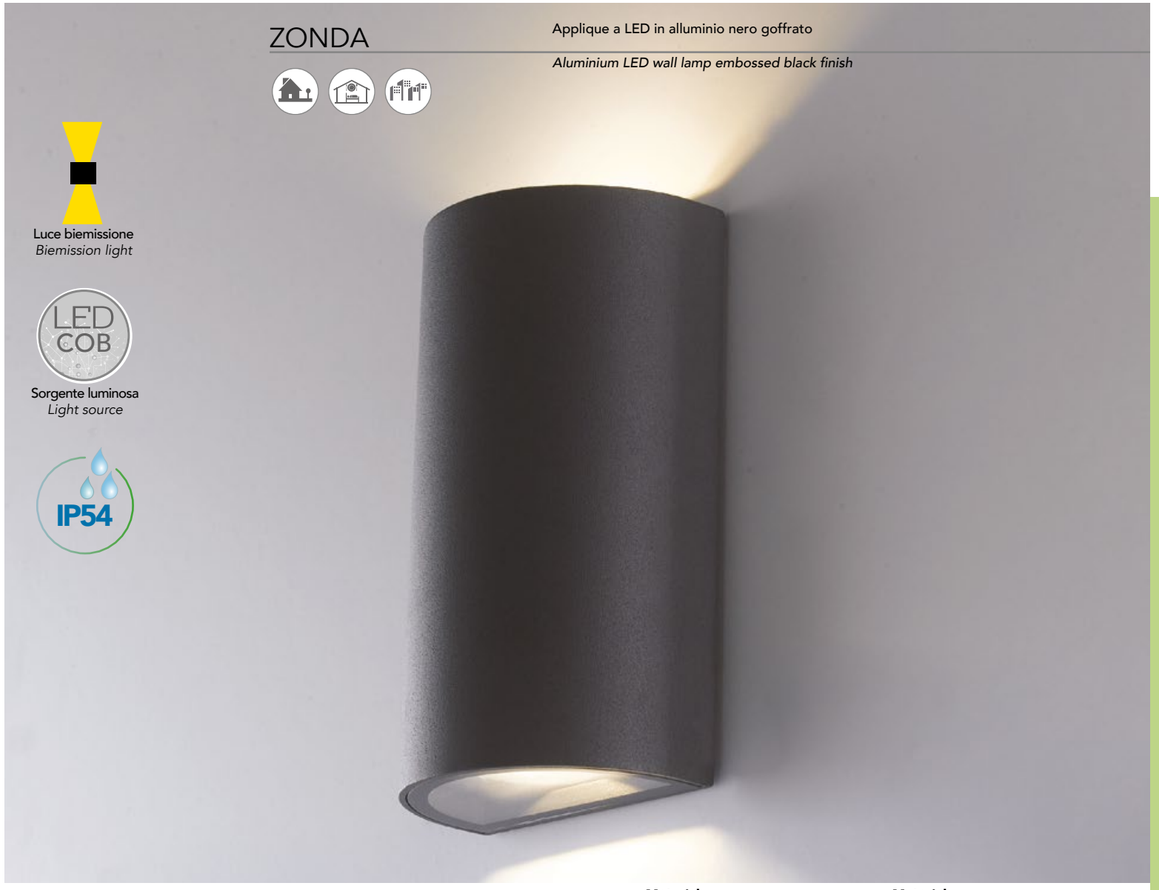

Luce biemissione
Biemission light

LED COB
Sorgente luminosa
Light source

IP54



Materiale
Alluminio
Colore
Goffrato nero

Material
Aluminium
Colour
Embossed black

Driver
incluso

Driver
included

Sorgente luminosa
LED COB 2X6W

Light source
LED COB 2X6W

Temperatura colore
4000K

Color temperature
4000K

Flusso luminoso
630 Lm

Luminous flux
630 Lm

Angolo di luce
↑120° + ↓120°

Beam angle
↑120° + ↓120°

CRI
>80

CRI
>80

Grado IK
IK07

IK degree
IK07

LED-W-ZONDA 8031440360982	**2X6W**

Misure - size
dimensioni in mm - size mm



CE EMC

BOXTER

Applique a LED in alluminio goffrato corten, nero, silver o bianco

Aluminium LED wall lamp embossed corten, black, silver or white finish

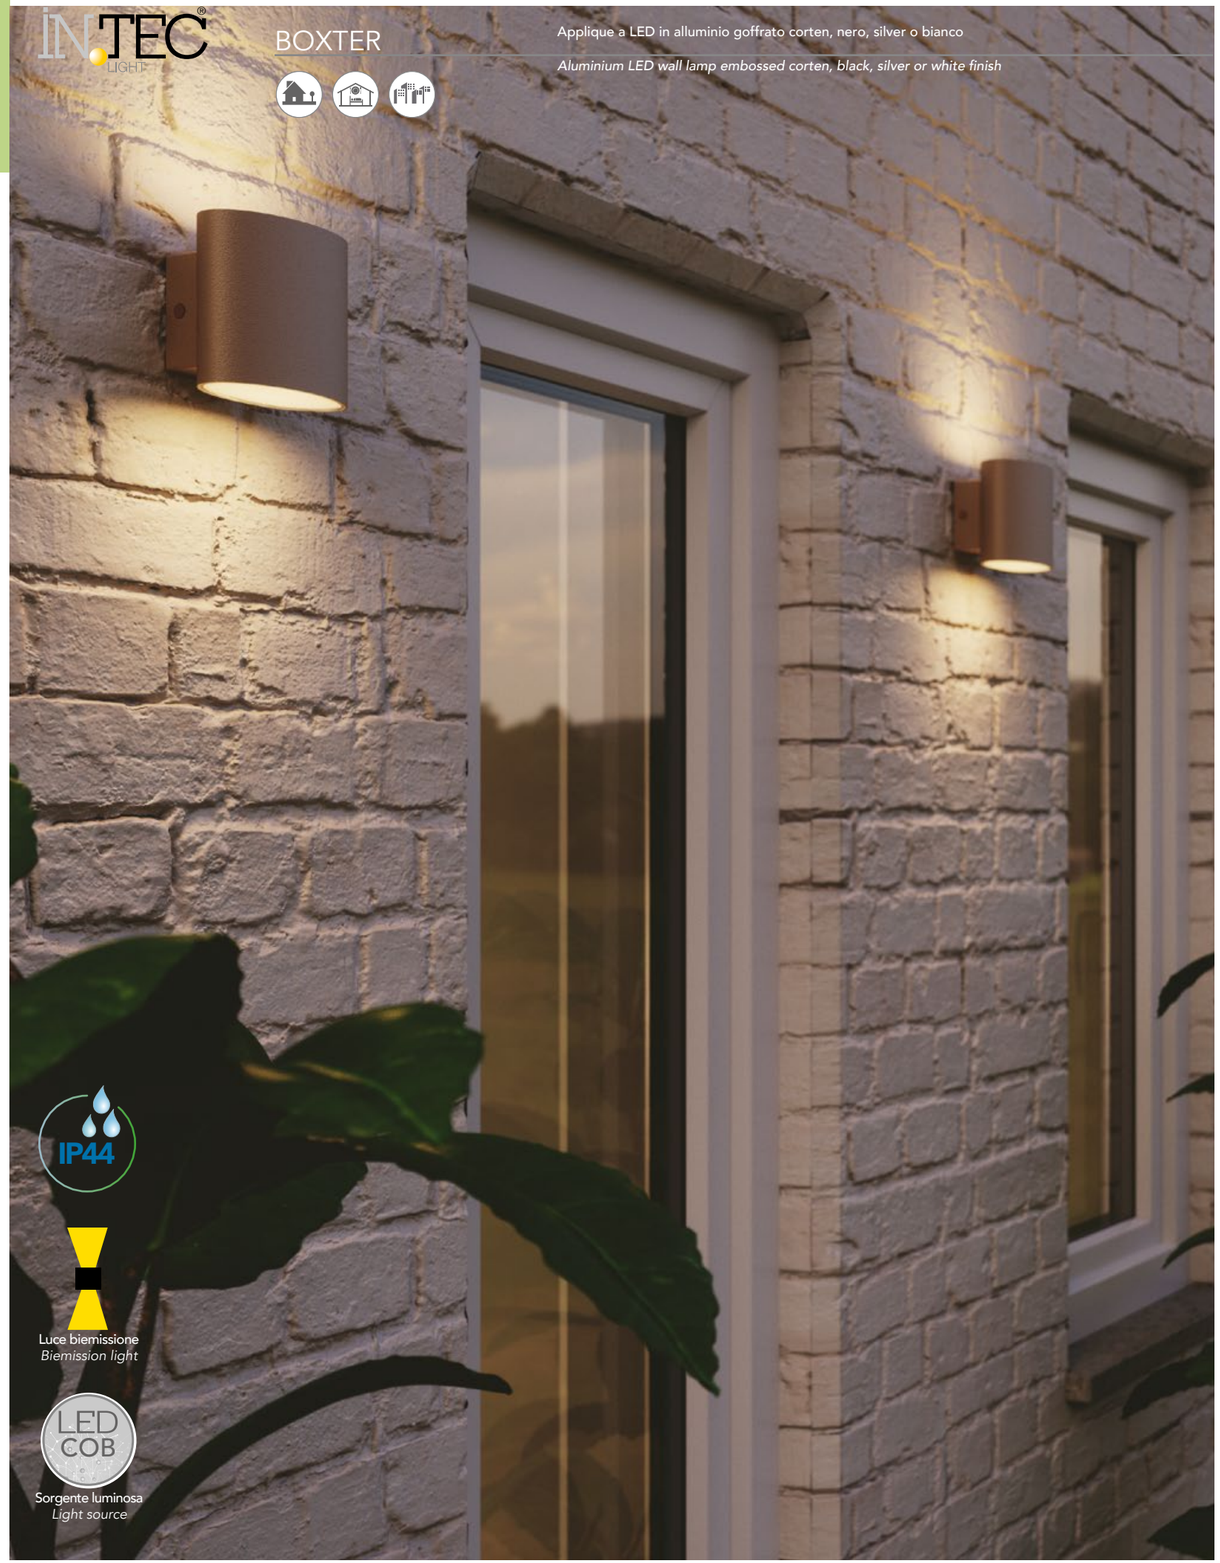

Materiale
Alluminio

Colore
Corten - nero - silver - bianco

Material
Aluminium

Colour
Corten - black - silver - white

Driver
incluso

Driver
included

Sorgente luminosa
LED COB 2X4W

Light source
LED COB 2X4W

Temperatura colore
4000K

Color temperature
4000K

Flusso luminoso
700 Lm

Luminous flux
700 Lm

Angolo di luce
↑120° + ↓120°

Beam angle
↑120° + ↓120°

CRI
>80

CRI
>80

Grado IK
IK07

IK degree
IK07



LED-W-BOXTER NER 8031414862382	■	2X4W
LED-W-BOXTER BCO 8031414873043	■	2X4W

Misure - size
dimensioni in mm - size mm





LED-W-BOXTER BRO 8031414862405	■	2X4W
LED-W-BOXTER SIL 8031414862399	■	2X4W

Misure - size
dimensioni in mm - size mm



BEETLE

Applique a LED in alluminio biemissione in antracite e bianco goffrato

Aluminium LED wall lamp double emitting light embossed anthracite or white finish

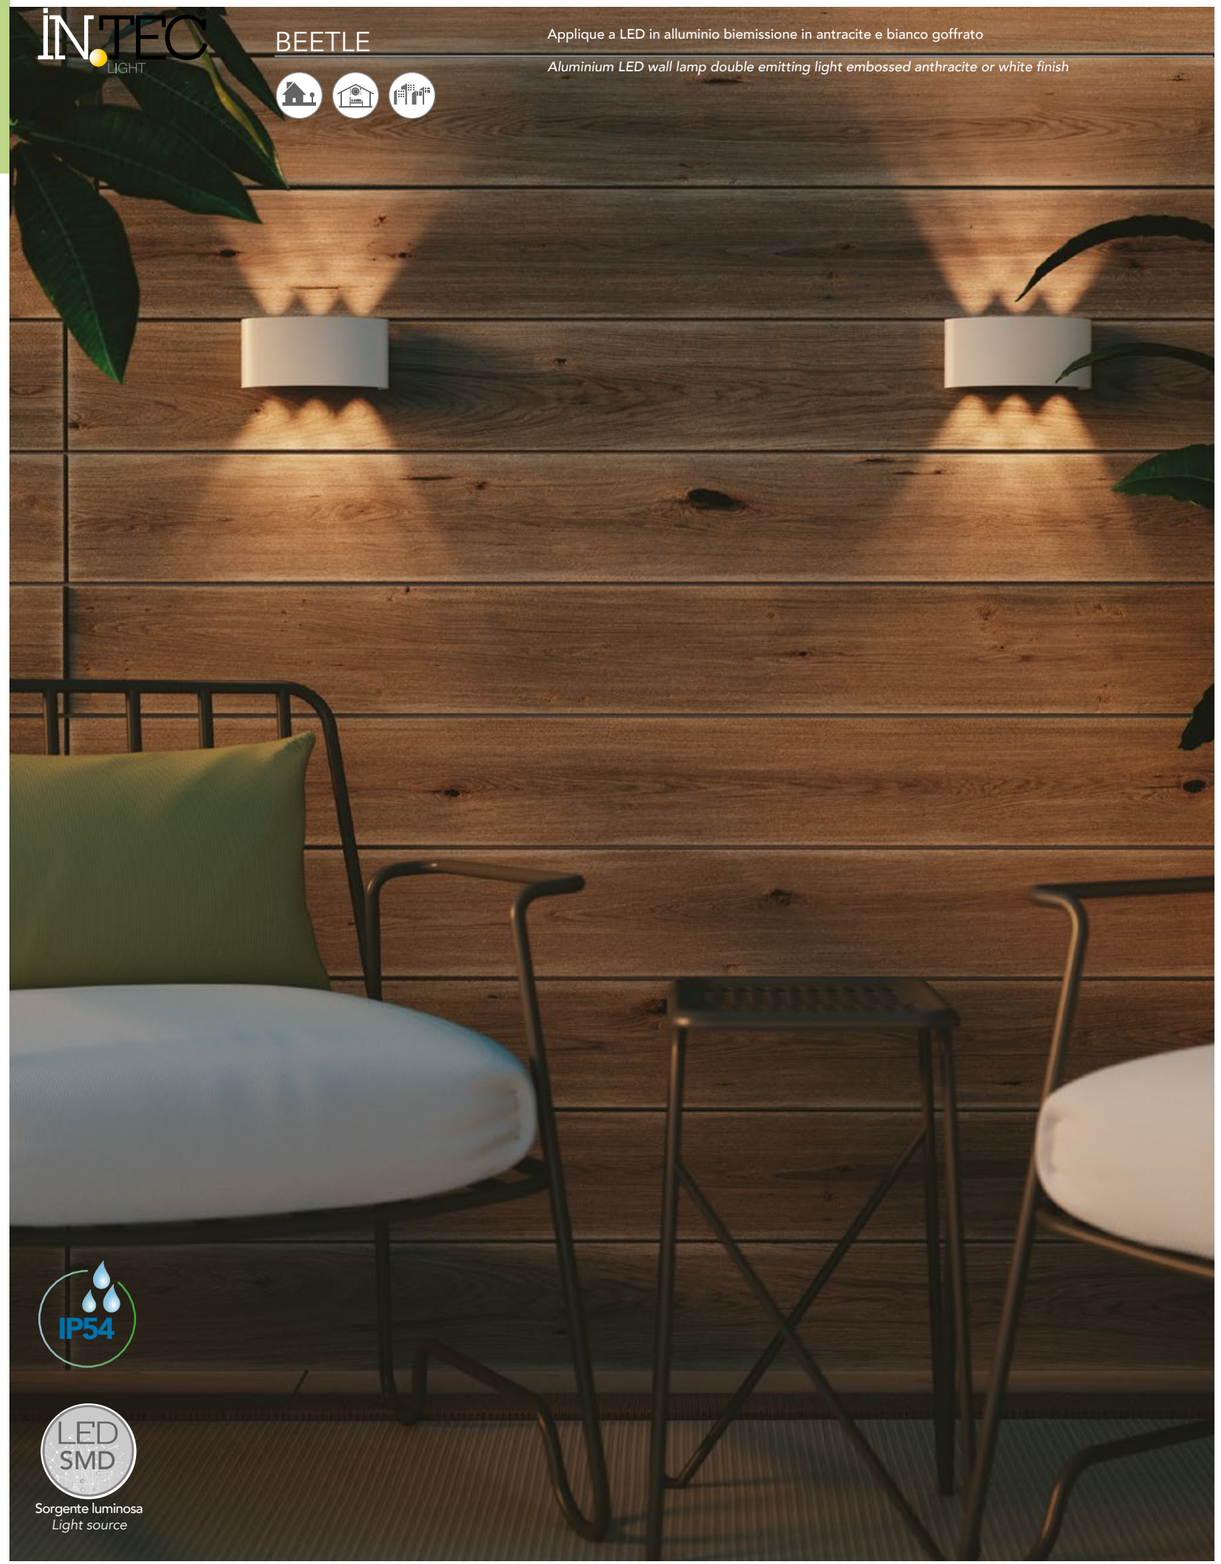

Materiale
Alluminio

Colore
Antracite goffrato - bianco goffrato

Driver
incluso

Sorgente luminosa
LED SMD 6W

Temperatura colore
4000K

Flusso luminoso
890 Lm

Angolo di luce
100°

CRI
>80

Grado IK
IK10

Material
Aluminium

Colour
Embossed anthracite - Embossed white

Driver
included

Light source
LED SMD 6W

Color temperature
4000K

Luminous flux
890 Lm

Beam angle
100°

CRI
>80

IK degree
IK10



LED-W-BEETLE GR
8031414876969
6W

Misure - size
dimensioni in mm - size mm





LED-W-BEETLE BCO
8031414876952
6W

Misure - size
dimensioni in mm - size mm



RIBBON

Fascia a LED in alluminio

Aluminum LED applique

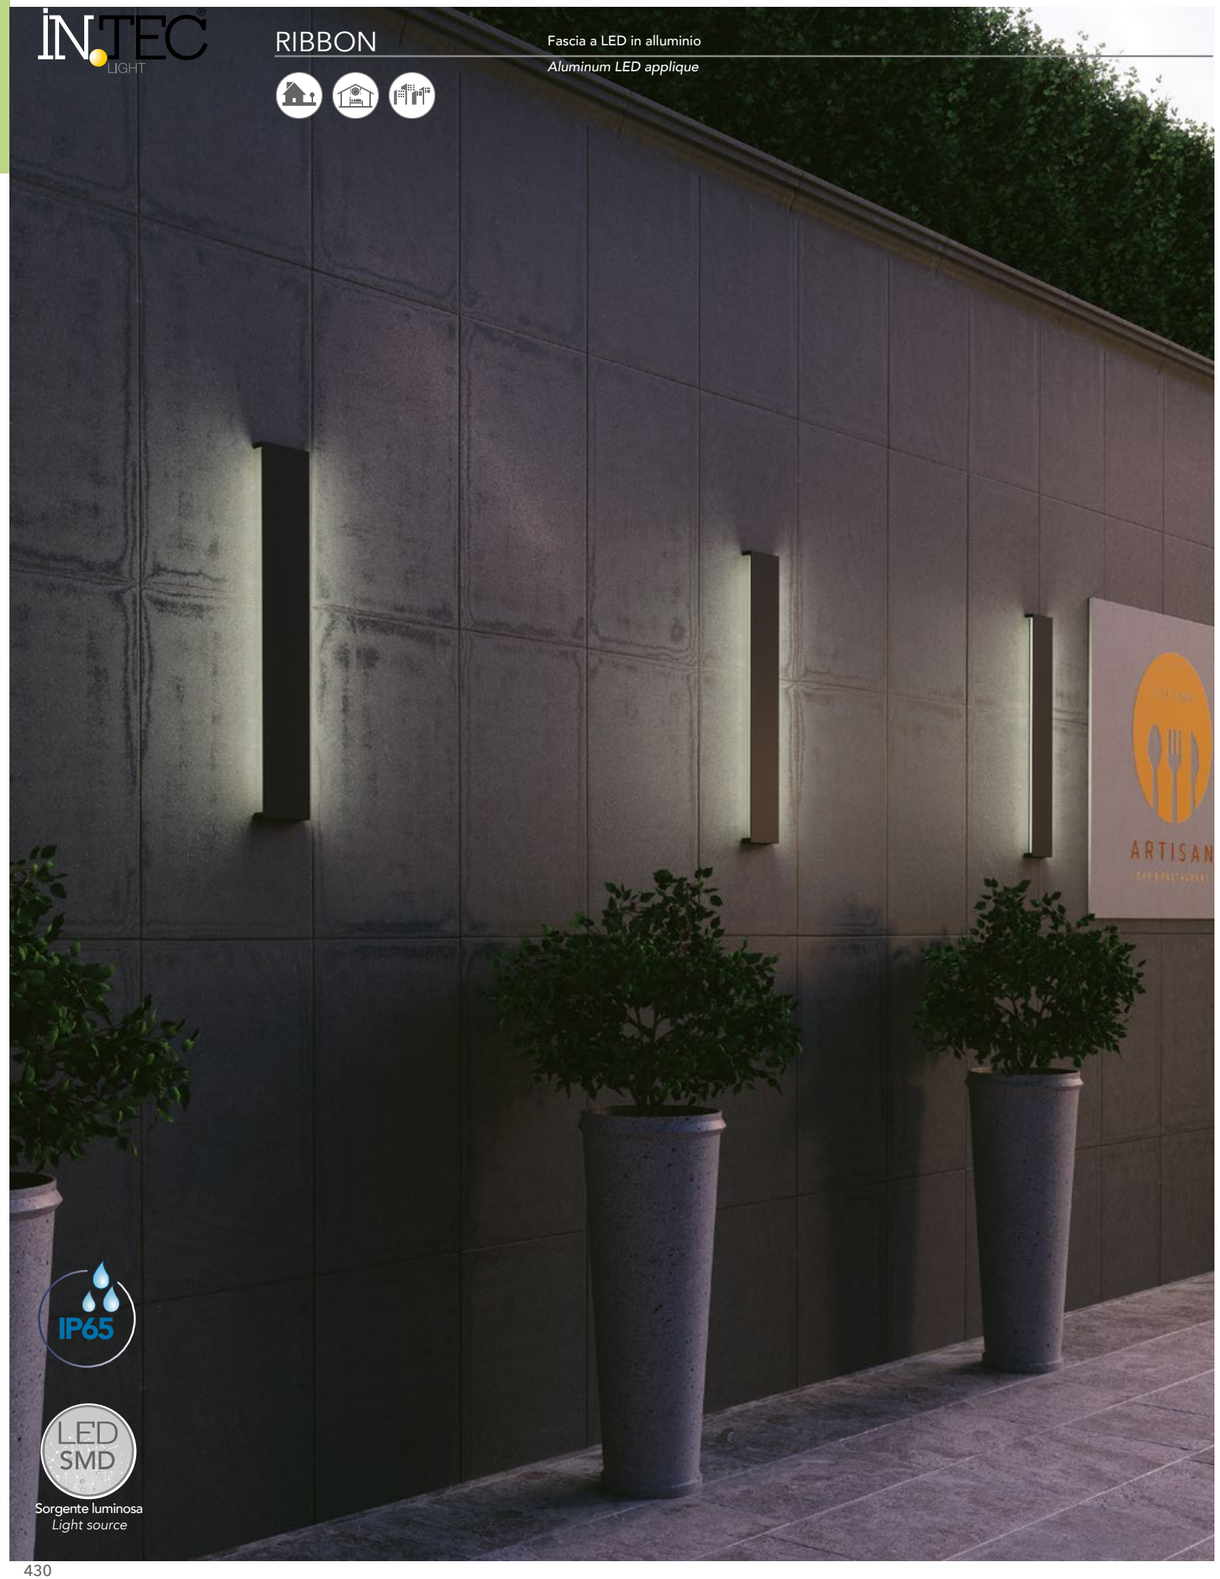

RIBBON

Materiale
Alluminio
Colore
Antracite goffrato
Driver
incluso
Sorgente luminosa
LED SMD
Temperatura colore
4000K
Flusso luminoso
1600 Lm - 2600 Lm
Angolo di luce
120°
CRI
>80
Grado IK
IK08

Material
Aluminium
Colour
Embossed anthracite
Driver
included
Light source
LED SMD
Color temperature
4000K
Luminous flux
1600 Lm - 2600 Lm
Beam angle
120°
CRI
>80
IK degree
IK IK08



LED-RIBBON-42 8031414882335	**2X6W**	**1600LM**

Misure - size
dimensioni in mm - size mm





LED-RIBBON-72 8031414882342	**2X10W**	**2600LM**

Misure - size
dimensioni in mm - size mm



LASER

Applique a LED a fascia in termoplastica biemissione

Thermoplastic biemission LED wall lamp

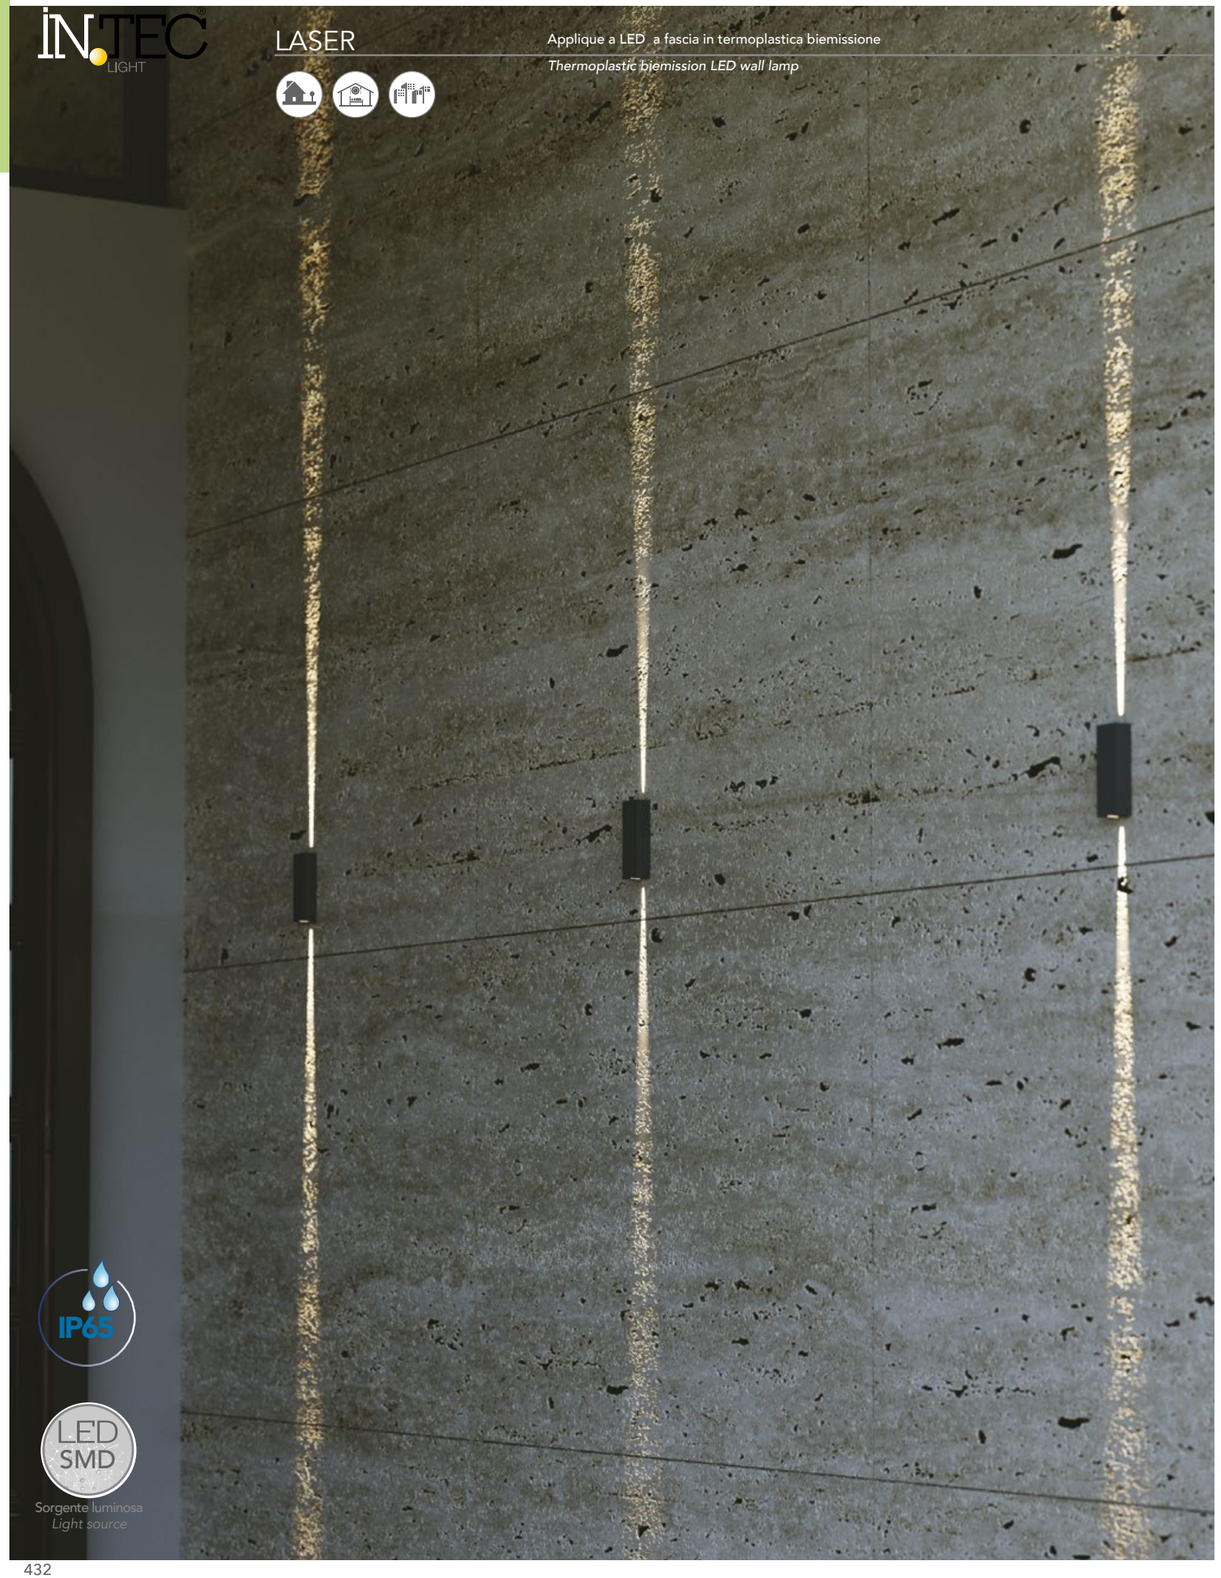

IP65

LED SMD

Sorgente luminosa
Light source

LASER

Materiale
Termoplastica

Colore
Antracite goffrato

Driver
incluso

Sorgente luminosa
LED SMD

Temperatura colore
4000K

Angolo di luce
5° - 2x4°

CRI
>80

Material
Thermoplastic

Colour
Embossed anthracite

Driver
included

Light source
LED SMD

Color temperature
4000K

Beam angle
5° - 2x4°

CRI
>80



LED-LASER 8031414882328	3W	5°

Misure - size
dimensioni in mm - size mm



LED-LASER-BIS 8031414882311	5W	2X4°

Misure - size
dimensioni in mm - size mm



CE EMC

ALFA

Applique a LED in alluminio corten, bianco o antracite goffrato con paratie regolabili indipendenti

Aluminium LED wall lamp embossed corten, white or anthracite finish with independent adjustable wings



IP54



Luce biemissione con paratie regolabili indipendenti

Bi-emission light with independent adjustable wings

LED SMD

Sorgente luminosa

Light source

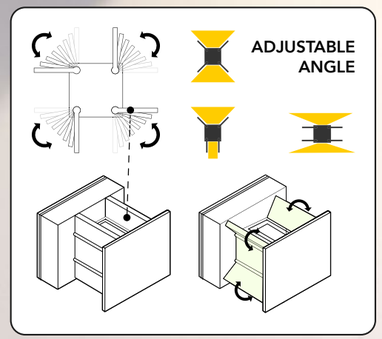





ALFA

Materiale
Alluminio

Colore
Antracite - bianco - corten

Driver
incluso

Sorgente luminosa
LED SMD 2X10W

Temperatura colore
3000K - 4000K

Flusso luminoso
1360 Lm - 1500 Lm

Angolo di luce
↑10°/120° + ↓10°/120°

CRI
>80

Grado IK
IK04

Material
Aluminium

Colour
Anthracite - white - korten

Driver
included

Light source
LED SMD 2X10W

Colour temperature
3000K - 4000K

Luminous flux
1360 Lm - 1500 Lm

Beam angle
↑10°/120° + ↓10°/120°

CRI
>80

Grado IK
IK04





LED-W-ALFA-20M ANT 8031414883462		**20W - 1500 Lm**
LED-W-ALFA-20C ANT 8031414883455		**20W - 1360 Lm**

Misure - size
dimensioni in mm - size mm







LED-W-ALFA-20M BCO 8031414883486		**20W - 1500 Lm**
LED-W-ALFA-20C BCO 8031414883479		**20W - 1360 Lm**

Misure - size
dimensioni in mm - size mm







LED-W-ALFA-20M BRO 8031414883509		**20W - 1500 Lm**
LED-W-ALFA-20C BRO 8031414883493		**20W - 1360 Lm**

Misure - size
dimensioni in mm - size mm



ALFA

Applique a LED in alluminio silver o bianco goffrato con paratie regolabili indipendenti

Aluminium LED wall lamp embossed silver or white finish with independent adjustable wings

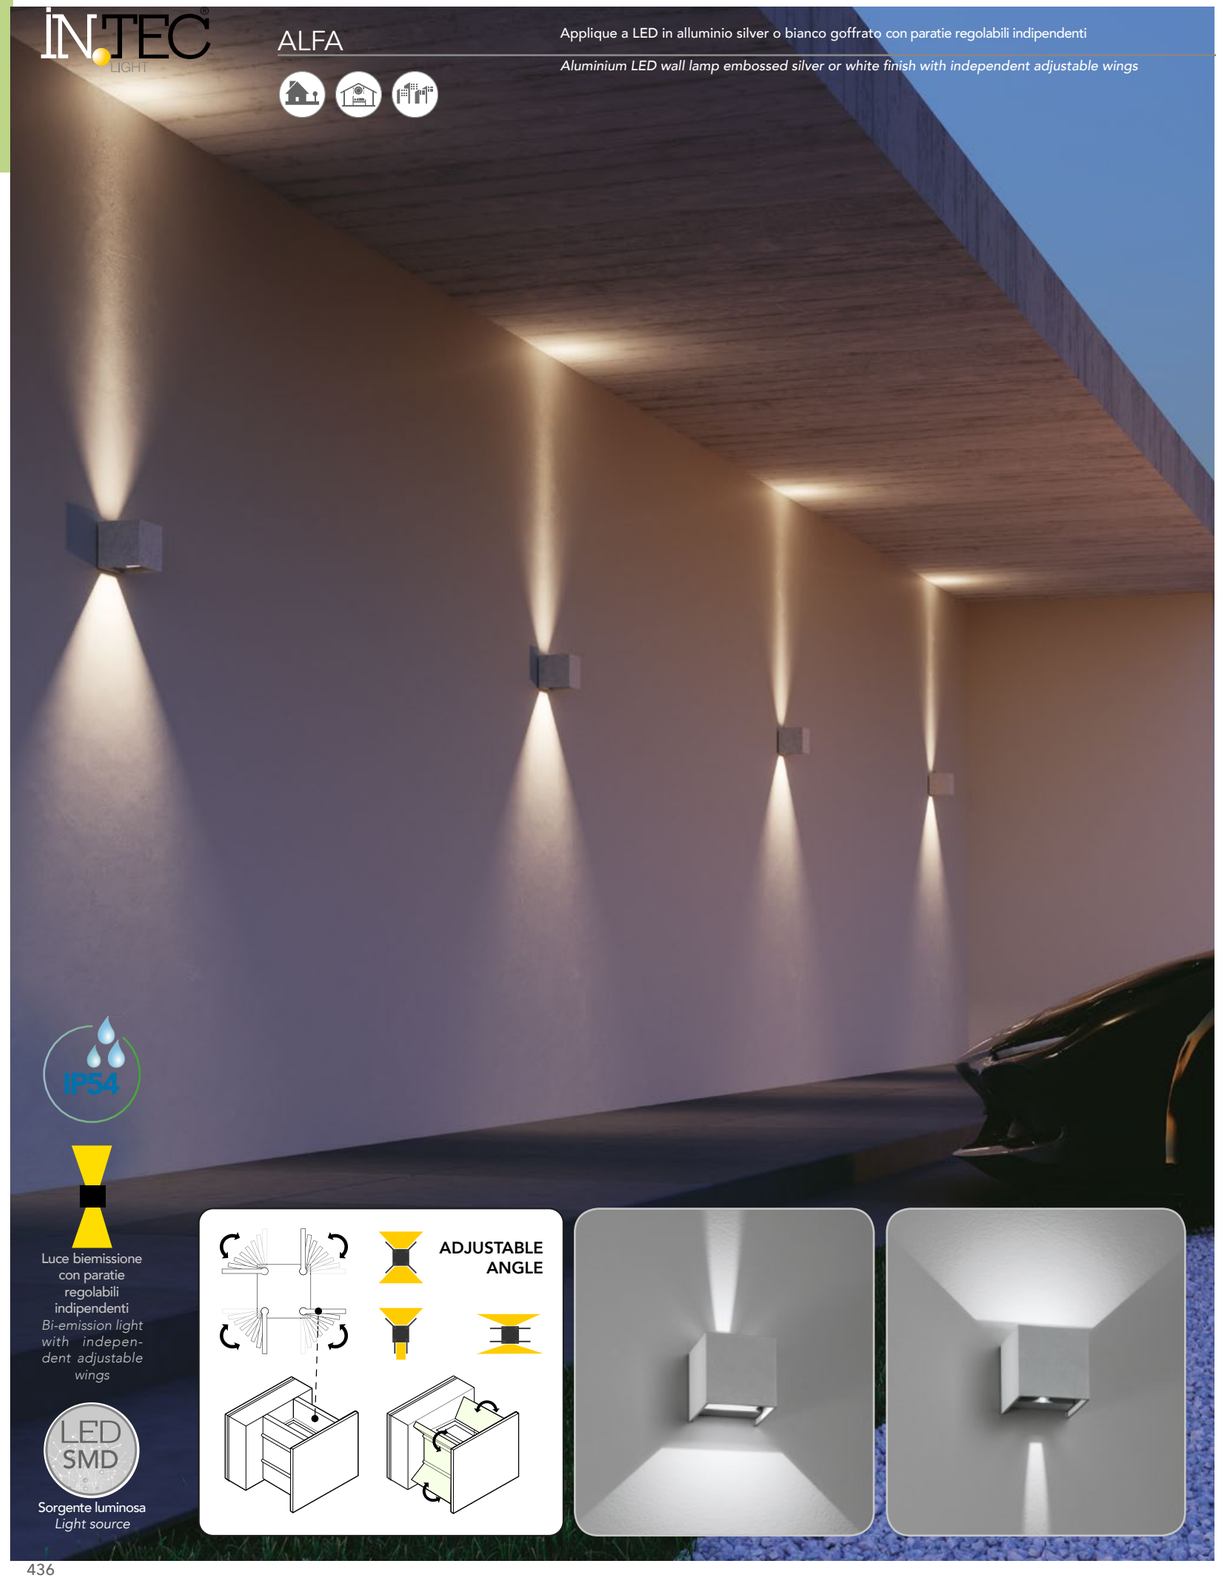

ALFA

Materiale
Alluminio
Colore
Silver goffrato - bianco goffrato
Driver
incluso
Sorgente luminosa
LED SMD 2X5W
Temperatura colore
3000K - 4000K
Flusso luminoso
510 Lm, 650 Lm
585 Lm, 738 Lm
Angolo di luce
10°/120° + 10°/120°
CRI
>80
Grado IK
IK04

Material
Aluminium
Colour
Embossed silver - Embossed white
Driver
included
Light source
LED SMD 2X5W
Colour temperature
3000K - 4000K
Luminous flux
510 Lm, 650 Lm
585 Lm, 738 Lm
Beam angle
10°/120° + 10°/120°
CRI
>80
Grado IK
IK04



LED-W-ALFA-10C GR 8031414871346		2X5W - 510 Lm
LED-W-ALFA-10M GR 8031414876693		2X5W - 585 Lm

Misure - size
dimensioni in mm - size mm





LED-W-ALFA-10C BCO 8031414870851		2X5W - 650 Lm
LED-W-ALFA-10M BCO 8031414876686		2X5W - 738 Lm

Misure - size
dimensioni in mm - size mm



DELTA

Applique a LED in alluminio silver o bianco goffrato con paratie regolabili indipendenti

Aluminium LED wall lamp embossed silver or white finish with independent adjustable wings



DELTA

Materiale
Alluminio

Colore
Silver goffrato - bianco goffrato

Driver
incluso

Sorgente luminosa
LED SMD 2X5W

Temperatura colore
3000K

Flusso luminoso
543 Lm - 675 Lm

Angolo di luce
↑10°/120° + ↓10°/120°

CRI
>80

Grado IK
IK04

Material
Aluminium

Colour
Embossed silver - Embossed white

Driver
included

Light source
LED SMD 2X5W

Color temperature
3000K

Luminous flux
543 Lm - 675 Lm

Beam angle
↑10°/120° + ↓10°/120°

CRI
>80

Grado IK
IK04



LED-W-DELTA-10C GR
8031414874125 — **2X5W - 543 Lm**

Misure - size
dimensioni in mm - size mm





LED-W-DELTA-10C BCO
8031414868537 — **2X5W - 675 Lm**

Misure - size
dimensioni in mm - size mm



BETA

Applique a LED in alluminio silver

Aluminium LED wall lamp silver finish

Luce biemissione
Biemission light

Sorgente luminosa
Light source



Materiale
Alluminio
Driver
integrato

Sorgente luminosa
LED SMD 3W

Temperatura colore
3000K

Flusso luminoso
250 Lm

Angolo di luce
120°

CRI
>80

Grado IK
IK07

Material
Aluminium
Driver
Built-in

Light source
LED SMD 3W

Color temperature
3000K

Luminous flux
250 Lm

Beam angle
120°

CRI
>80

IK degree
IK07

LED-BETA-AP1 8031434051216	3W	250 LM

Misure - size
dimensioni in mm - size mm



GHIBLI

Applique a LED in alluminio

Aluminium LED wall lamp

Luce
Light

Sorgente luminosa
Light source



Materiale
Alluminio

Colore
Silver goffrato - bianco goffrato

Driver
incluso

Sorgente luminosa
LED SMD 4X2W

Temperatura colore
3000K

Flusso luminoso
520 Lm

Angolo di luce
120°x 4

CRI
>80

Grado IK
IK07

Material
Aluminium

Colour
Embossed silver - Embossed white

Driver
included

Light source
LED SMD 4X2W

Color temperature
3000K

Luminous flux
520 Lm

Beam angle
120°x 4

CRI
>80

IK degree
IK07

LED-W-GHIBLI/8W 8031440351430	4X2W

Misure - *size*
dimensioni in mm - size mm





LED-W-GHIBLI/8W BCO 8031440360593	4X2W

Misure - *size*
dimensioni in mm - size mm



PARKER

Applique a LED biemissione in cemento grigio naturale

Double emission LED wall light natural concrete gray finish

CEMENTO
CONCRETE

IP65

Luce biemissione
Biemission light

LED SMD

Sorgente luminosa
Light source

PARKER

Materiale
Cemento

Colore
Grigio

Driver
incluso

Sorgente luminosa
LED SMD 8,6W - 16,9W

Temperatura colore
4000K

Flusso luminoso
512Lm - 1000Lm

Angolo di luce
↑120° + ↓120°

CRI
>80

Grado IK
IK04

Material
Concrete

Colour
Grey

Driver
included

Light source
LED SMD 8,6W - 16,9W

Color temperature
4000K

Luminous flux
512Lm - 1000Lm

Beam angle
↑120° + ↓120°

CRI
>80

IK degree
IK04



LED-PARKER-AP30 GR — **8,6W- 512 Lm**
8031414866977

Connettore IP65 incluso
IP65 connector included

Misure - size
dimensioni in mm - size mm



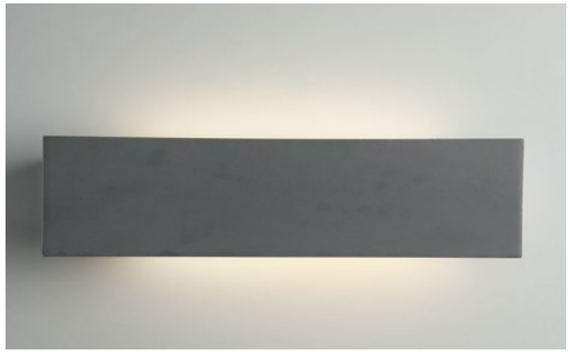

LED-PARKER-AP50 GR — **16,9W- 1000 Lm**
8031414866984



Connettore IP65 incluso
IP65 connector included

Misure - size
dimensioni in mm - size mm



PARKER

Applique a LED biemissione in cemento bianco

Double emission LED wall light concrete white finish



CEMENTO
CONCRETE

LED SMD

Sorgente luminosa
Light source

Luce biemissione
Biemission light

IP65

Materiale
Cemento

Colore
Bianco

Driver
incluso

Sorgente luminosa
LED SMD 8W - 12W - 20W - 30W

Temperatura colore
4000K

Flusso luminoso
400Lm - 600Lm - 1000Lm - 1500Lm

Angolo di luce
120° + 120°

CRI
>80

Grado IK
IK04

Material
Concrete

Colour
White

Driver
included

Light source
LED SMD 8W - 12W - 20W - 30W

Color temperature
4000K

Luminous flux
400Lm - 600Lm - 1000Lm - 1500Lm

Beam angle
120° + 120°

CRI
>80

IK degree
IK04



LED-PARKER-AP30 — **8W - 400 Lm**
8031414864195

Connettore IP65 incluso
IP65 connector included

Misure - size
dimensioni in mm - size mm



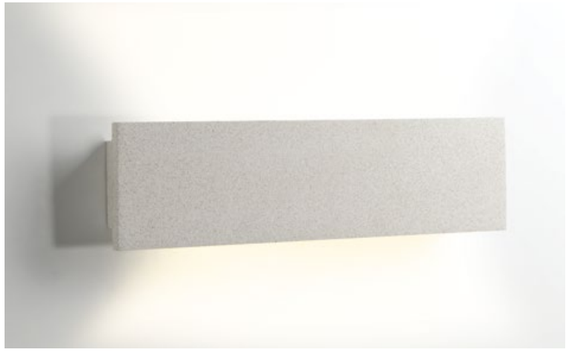

LED-PARKER-AP40 — **12W - 600 Lm**
8031414864201

Connettore IP65 incluso
IP65 connector included

Misure - size
dimensioni in mm - size mm



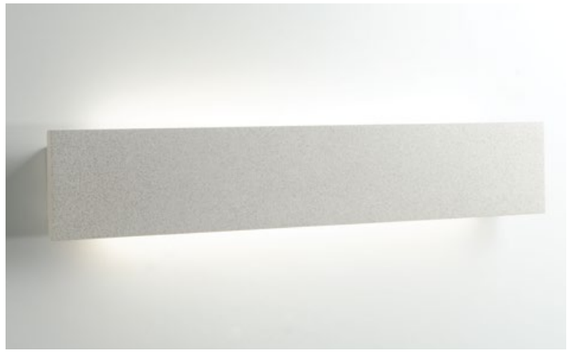

LED-PARKER-AP60 — **20W - 1000 Lm**
8031414862504

Connettore IP65 incluso
IP65 connector included

Misure - size
dimensioni in mm - size mm





LED-PARKER-AP120 — **30W- 1500 Lm**
8031414862511

Connettore IP65 incluso
IP65 connector included

Misure - size
dimensioni in mm - size mm



EMC





PORTLAND

Applique biemissione in cemento bianco
Double emission wall light concrete white finish

IP65

Connettore IP65 incluso
IP65 connector included

GU10

Attacco sorgente
Light source

Luce biemissione
Biemission light

CEMENTO CONCRETE

I-PORTLAND-AP2 BCO 8031414863563	2XGU10 MAX 35W	IK04

Lampadina non inclusa
Light bulb not included

Misure - size
dimensioni in mm - size mm





OAKLAND

Applique biemissione in cemento bianco
Double emission wall light concrete white finish

IP65

Connettore IP65 incluso
IP65 connector included

GU10

Attacco sorgente
Light source

Luce biemissione
Biemission light

CEMENTO CONCRETE

I-OAKLAND-AP2 BCO 8031414864218	2XGU10 MAX 35W	IK04

Lampadina non inclusa
Light bulb not included

Misure - size
dimensioni in mm - size mm



JUMP

Applique in alluminio silver, bianco o in acciaio inox

Wall lamp aluminium silver , white finish or stainless steel

Luce biemissione

Biemission light

IP44



I-JUMP-AP2-E27 SIL
8031414865390
2XE27 MAX 60W

Lampadina non inclusa
Light bulb not included

Misure - size
dimensioni in mm - size mm



E27
Attacco sorgente
Light source



I-JUMP-AP2 SIL 8031414862344		**2XGU10 MAX 35W**
I-JUMP-AP2 BCO 8031414862351		**2XGU10 MAX 35W**
I-JUMP-AP2 INOX 8031414862368		**2XGU10 MAX 35W**

Lampadina non inclusa
Light bulb not included

Misure - size
dimensioni in mm - size mm



GU10
Attacco sorgente
Light source

ONE

Applique in alluminio nelle versioni bianco, antracite o corten

Aluminium wall lamp anthracite, white or corten finish





I-ONE-AP2 ANT 8031414082100		2XGU10 MAX 35W
I-ONE-AP2 BRO 8031414079995		2XGU10 MAX 35W
I-ONE-AP2 BCO 8031414878864		2XGU10 MAX 35W

Lampadina non inclusa
Light bulb not included

Misure - size
dimensioni in mm - size mm





Luce biemissione
Biemission light



Attacco sorgente
Light source



I-ONE-AP1 ANT 8031414073009		1XGU10 MAX 35W
I-ONE-AP1 BRO 8031414048861		1XGU10 MAX 35W
I-ONE-AP1 BCO 8031414878857		1XGU10 MAX 35W

Lampadina non inclusa
Light bulb not included

Misure - size
dimensioni in mm - size mm





Luce
light



Attacco sorgente
Light source

QUBO

Applique in alluminio nelle versioni bianco, antracite o corten

Aluminium wall lamp anthracite, white or corten finish





I-QUBO-AP2 ANT 8031414084289		2XGU10 MAX 35W
I-QUBO-AP2 BRO 8031414083336		2XGU10 MAX 35W
I-QUBO-AP2 BCO 8031414878840		2XGU10 MAX 35W

Lampadina non inclusa
Light bulb not included

Misure - size
dimensioni in mm - size mm





Luce biemissione
Biemission light



Attacco sorgente
Light source



I-QUBO-AP1 ANT 8031414084203		1XGU10 MAX 35W
I-QUBO-AP1 BRO 8031414082117		1XGU10 MAX 35W
I-QUBO-AP1 BCO 8031414878833		1XGU10 MAX 35W

Lampadina non inclusa
Light bulb not included

Misure - size
dimensioni in mm - size mm





Luce
light



Attacco sorgente
Light source

TUCSON

Applique in alluminio bronzo, bianco o silver con diffusore in policarbonato

Aluminium wall lamp bronze, white or silver PC diffuser





I-TUCSON-AP BCO **2XE14 MAX 40W**
8031414862160

Lampadina non inclusa
Light bulb not included

Misure - size
dimensioni in mm - size mm





Lampadina consigliata
Reccomended bulb

Attacco sorgente
Lampholder



I-TUCSON-AP SIL **2XE14 MAX 40W**
8031414862184

Lampadina non inclusa
Light bulb not included

Misure - size
dimensioni in mm - size mm





Lampadina consigliata
Reccomended bulb

Attacco sorgente
Lampholder



I-TUCSON-AP BRO **2XE14 MAX 40W**
8031414862191

Lampadina non inclusa
Light bulb not included

Misure - size
dimensioni in mm - size mm





Lampadina consigliata
Reccomended bulb

Attacco sorgente
Lampholder

HURACAN

Applique in alluminio pressofuso antracite goffrato

Alluminium die-cast wall lamp embossed anthracite finish

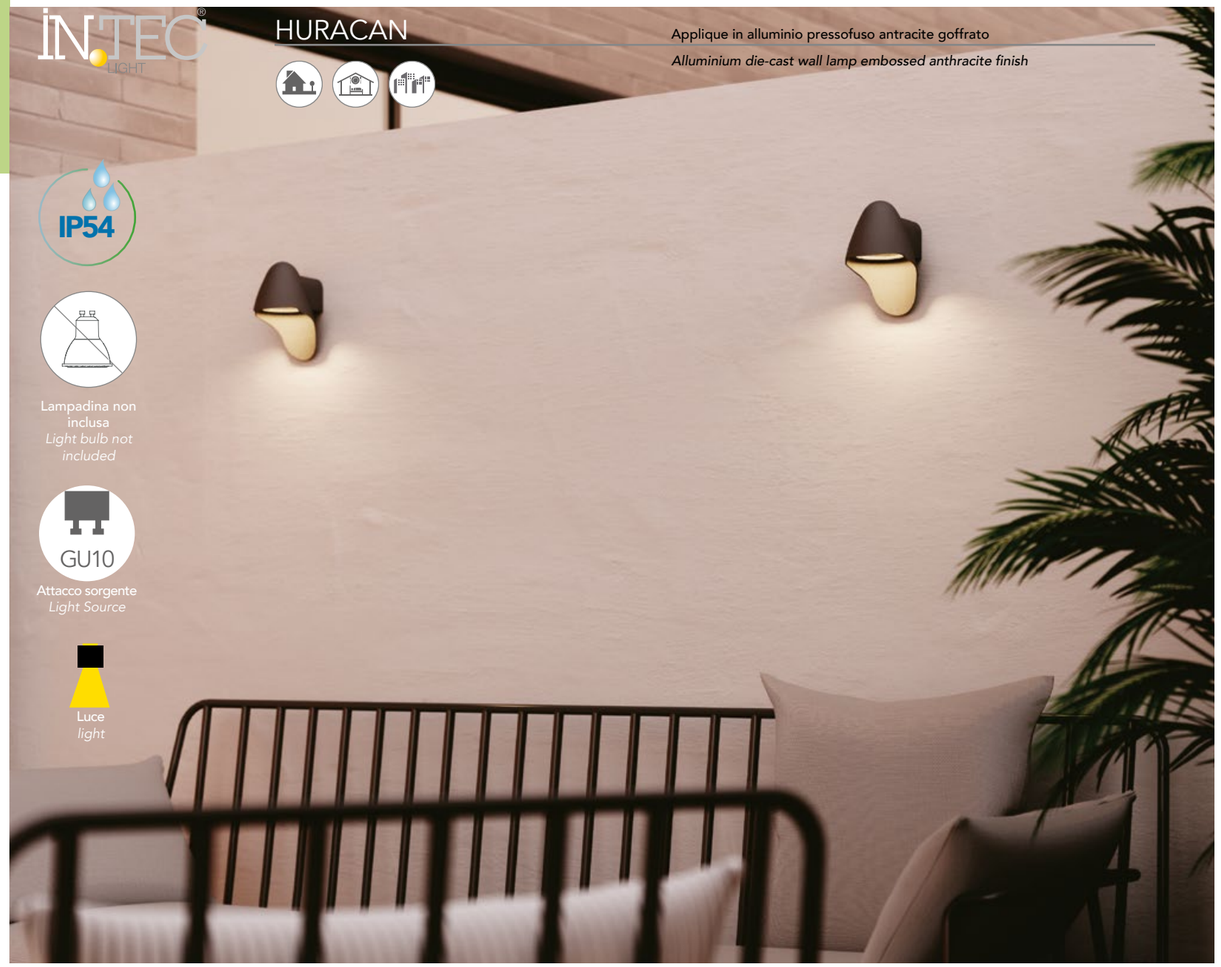

IP54

Lampadina non inclusa
Light bulb not included

GU10
Attacco sorgente
Light Source

Luce
light



I-HURACAN-AP
8031440361026
1XGU10 MAX 35W

Lampadina non inclusa
Light bulb not included

Misure - size
dimensioni in mm - size mm



SEATTLE

Applique in alluminio, finitura antracite con diffusore opale in policarbonato

Aluminium wall lamp with anthracite finish and PC opal diffuser

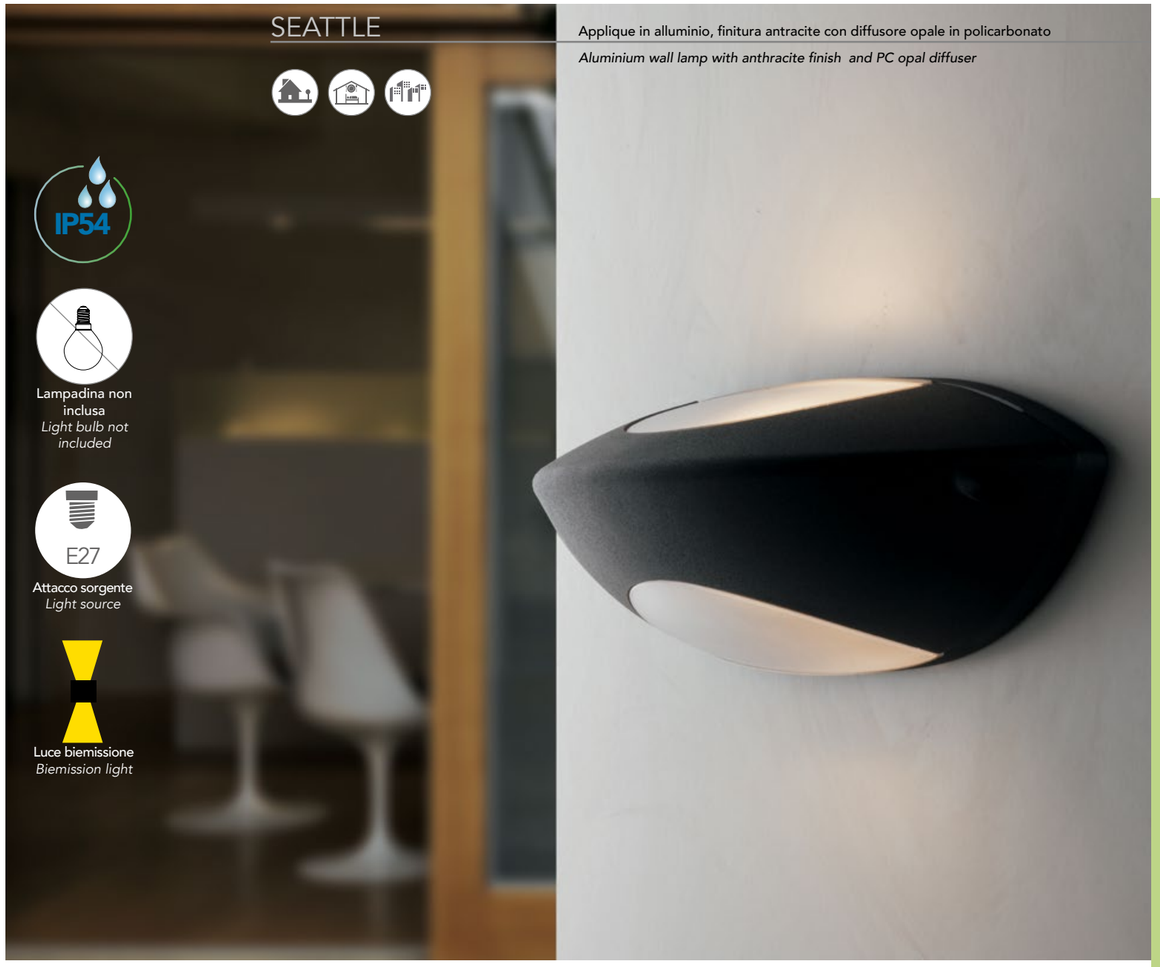

IP54

Lampadina non inclusa
Light bulb not included

E27
Attacco sorgente
Light source

Luce biemissione
Biemission light



I-SEATTLE-AP
8031440312233
1XE27 MAX 42W

Lampadina non inclusa
Light bulb not included

Misure - size
dimensioni in mm - size mm



AUSTIN

Applique in alluminio bronzo, bianco, silver o nero con diffusore in policarbonato

Aluminium wall lamp bronze, white, silver or black PC diffuser





E27
Attacco sorgente
Light Source

I-AUSTIN-AP BCO
8031440362122
1XE27 MAX 42W

Lampadina non inclusa
Light bulb not included

Misure - size
dimensioni in mm - size mm





E27
Attacco sorgente
Light Source

I-AUSTIN-AP SIL
8031414862429
1XE27 MAX 42W

Lampadina non inclusa
Light bulb not included

Misure - size
dimensioni in mm - size mm





E27
Attacco sorgente
Light Source

I-AUSTIN-AP BRO
8031440362108
1XE27 MAX 42W

Lampadina non inclusa
Light bulb not included

Misure - size
dimensioni in mm - size mm





E27
Attacco sorgente
Light Source

I-AUSTIN-AP NER
8031440362139
1XE27 MAX 42W

Lampadina non inclusa
Light bulb not included

Misure - size
dimensioni in mm - size mm



BOSTON

Applique in alluminio finitura antracite con diffusore opale in policarbonato

Aluminium wall lamp anthracite finish with PC opal diffuser

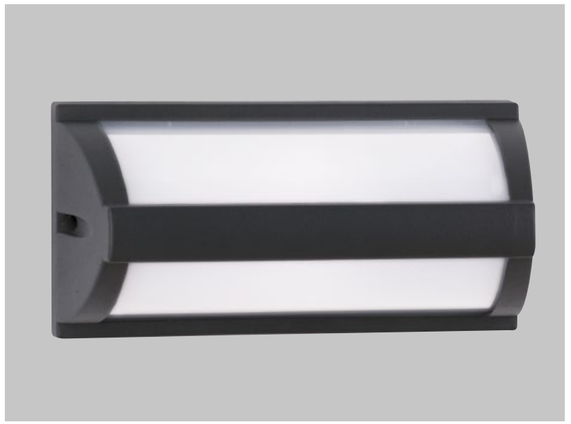

E27
Attacco sorgente
Light source

IP54

Luce biemissione
Biemission light

I-BOSTON-AP
8031440312240

1XE27 MAX 42W

Lampadina non inclusa
Light bulb not included

Misure - size
dimensioni in mm - size mm



ATLANTA

Applique in alluminio con diffusore opale in policarbonato finitura antracite

Aluminium wall lamp with PC opal diffuser anthracite finish

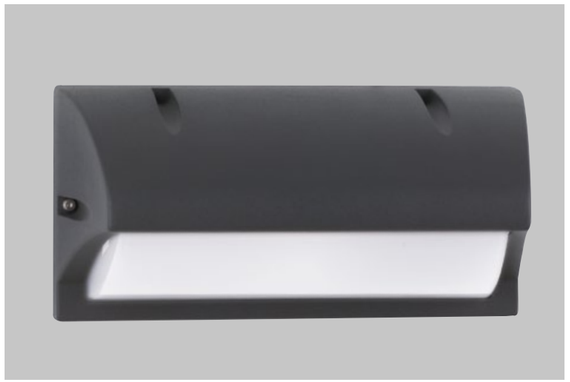

E27
Attacco sorgente
Light source

IP54

I-ATLANTA-AP
8031440312257

1XE27 MAX 42W

Lampadina non inclusa
Light bulb not included

Misure - size
dimensioni in mm - size mm



MEMPHIS

Applique in alluminio con diffusore opale in policarbonato finitura antracite

Aluminium wall lamp with PC opal diffuser anthracite finish



E27
Attacco sorgente
Light source

IP54

Luce biemissione
Biemission light

I-MEMPHIS-AP
8031440312226

1XE27 MAX 42W

Lampadina non inclusa
Light bulb not included

Misure - size
dimensioni in mm - size mm



DENVER

Applique in alluminio con diffusore opale in policarbonato finitura antracite

Aluminium wall lamp with PC opal diffuser anthracite finish



E27
Attacco sorgente
Light source

IP54

Luce biemissione
Biemission light

I-DENVER-AP
8031440312264

1XE27 MAX 42W

Lampadina non inclusa
Light bulb not included

Misure - size
dimensioni in mm - size mm



MONDRIAN

Applique in metallo bronzo o silver con diffusore in vetro

Metal wall lamp bronze or silver glass diffuser





I-MONDRIAN-AP SIL 8031414862306		1XE27 MAX 25W
I-MONDRIAN-AP BRO 8031414862313		1XE27 MAX 25W

Lampadina non inclusa
Light bulb not included

E27

Attacco sorgente
Light source

Misure - size
dimensioni in mm - size mm



GAETA

Lanterna in alluminio pressofuso finitura nero-oro con diffusore in vetro

Diecast aluminium black-gold finish lantern with glass diffuser





LANT-GAETA-AP1 8031440313278		1XE27 MAX 60W

Lampadina non inclusa
Light bulb not included

E27

Attacco sorgente
Light source

Misure - size
dimensioni in mm - size mm



GRUBB

Proiettore in termoplastica picchetto incluso

Termoplastic flood light with spike included

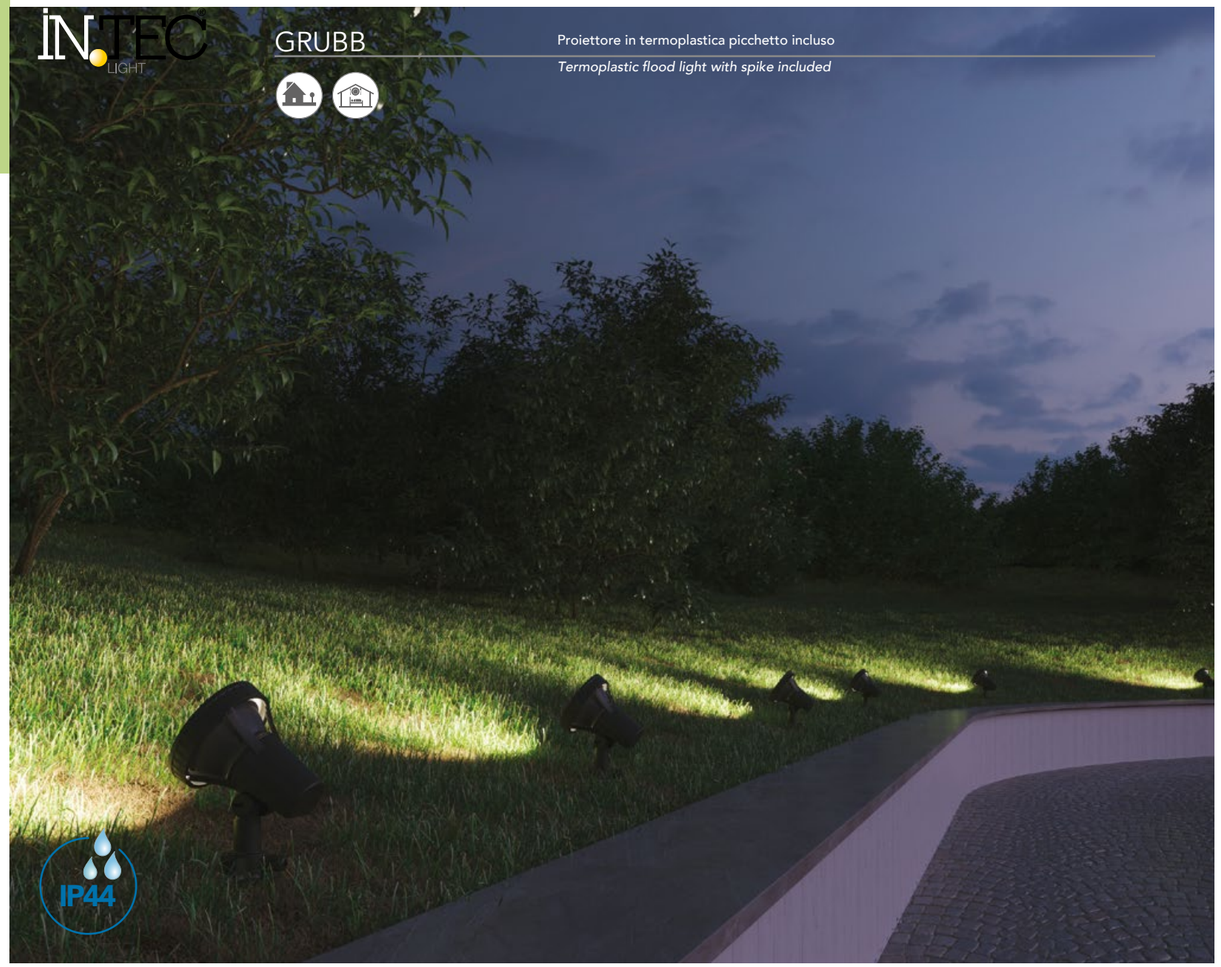



LED-GRUBB-7M
8031414883554
1XE27

Lampadina LED SMD inclusa
LED SMD light bulb included

Misure - size
dimensioni in mm - size mm



Dimmer	Watt	CRI	Lm	Angolo	Kelvin	On/off	Durata
⊗	7W	80	600	100°	4000	>10.000	25000h





LED-GRUBB-15M
8031414883547
1XE27

Lampadina LED SMD inclusa
LED SMD light bulb included

Misure - size
dimensioni in mm - size mm



Dimmer	Watt	CRI	Lm	Angolo	Kelvin	On/off	Durata
⊗	15W	80	1300	100°	4000	>10.000	25000h



AKRON

Proiettore in alluminio con picchetto incluso

Aluminium flood light with spike included





I-AKRON-NER 8031414882663	■	1XGU10 MAX 35W
I-AKRON-BRO 8031414882656	■	1XGU10 MAX 35W
I-AKRON-BCO 8031414882649	□	1XGU10 MAX 35W

Lampadina non inclusa
Light bulb not included

Misure - size
dimensioni in mm - size mm



GU10
Attacco sorgente
Light source

TOGO

Plafoniera a LED in acrilico

LED acrylic ceiling lamp with diffuser

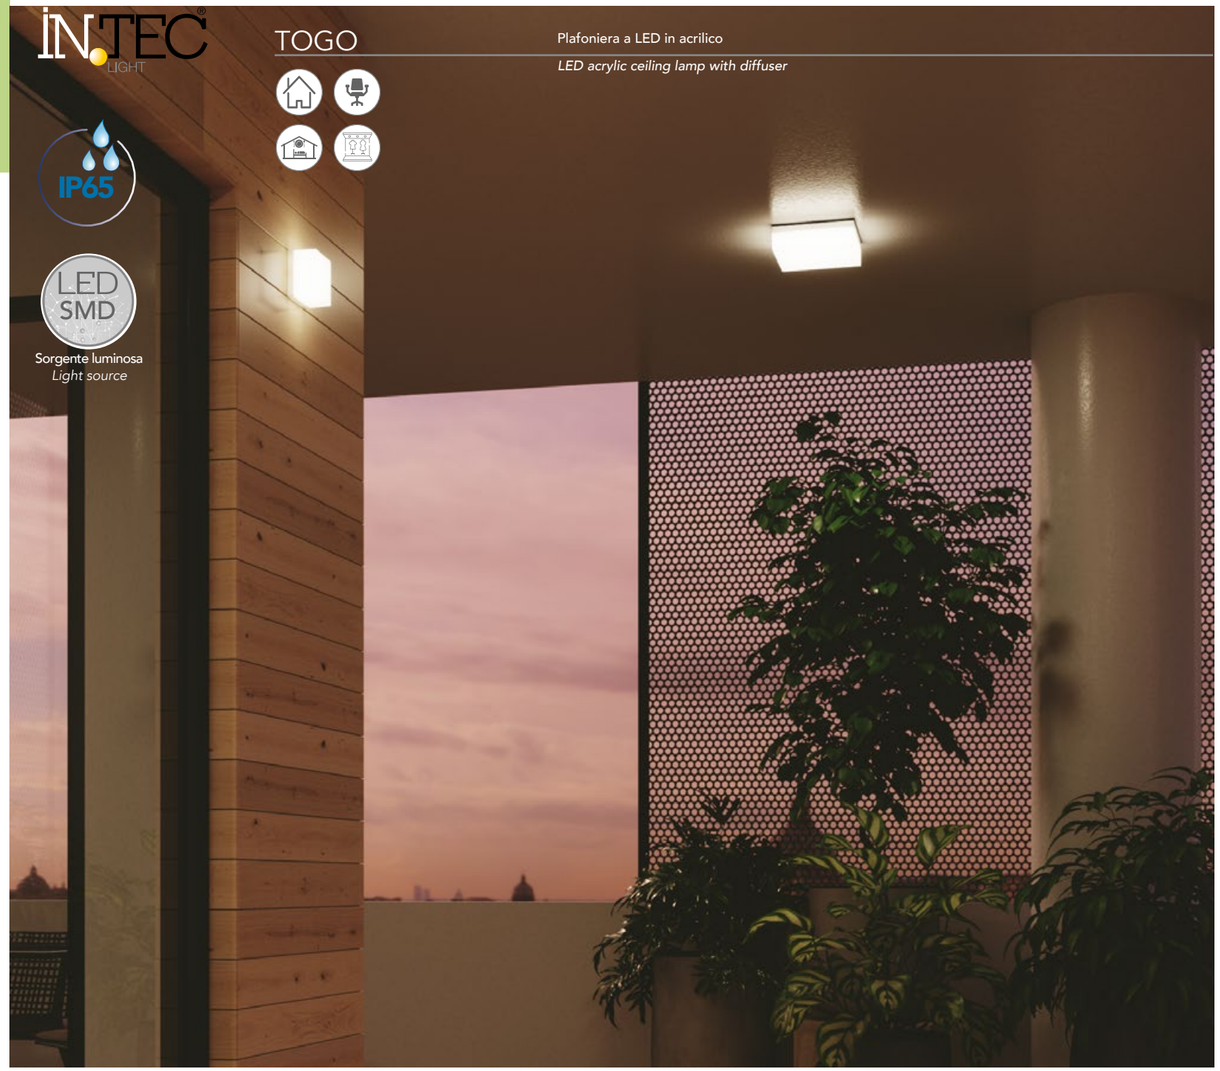

IP65

LED SMD

Sorgente luminosa
Light source



Materiale
Acrilico PMMA

Colore
Bianco

Driver
integrato

Sorgente luminosa
LED SMD 5W- 20W-8W- 12W

Temperatura colore selezionabile
4000K - 6500K - 3000K

Angolo di luce
120°

CRI
>80

Material
PMMA acrylic

Colour
White

Driver
Built-in driver

Light source
LED SMD 5W- 20W-8W- 12W

Selectable color temperature
4000K - 6500K - 3000K

Beam angle
120°

CRI
>80



LED-TOGO-Q10
8031414883615
5W- 450 Lm

Misure - size
dimensioni in mm - size mm





LED-TOGO-Q25
8031414883646
20W - 1800 Lm

Misure - size
dimensioni in mm - size mm





LED-TOGO-RT20
8031414883622
8W - 720 Lm

Misure - size
dimensioni in mm - size mm





LED-TOGO-RT30
8031414883639
12W - 1080 Lm

Misure - size
dimensioni in mm - size mm



ZOOM

Plafoniera a LED wifi con videocamera di sicurezza integrata

LED wifi ceiling lamp with built-in security camera

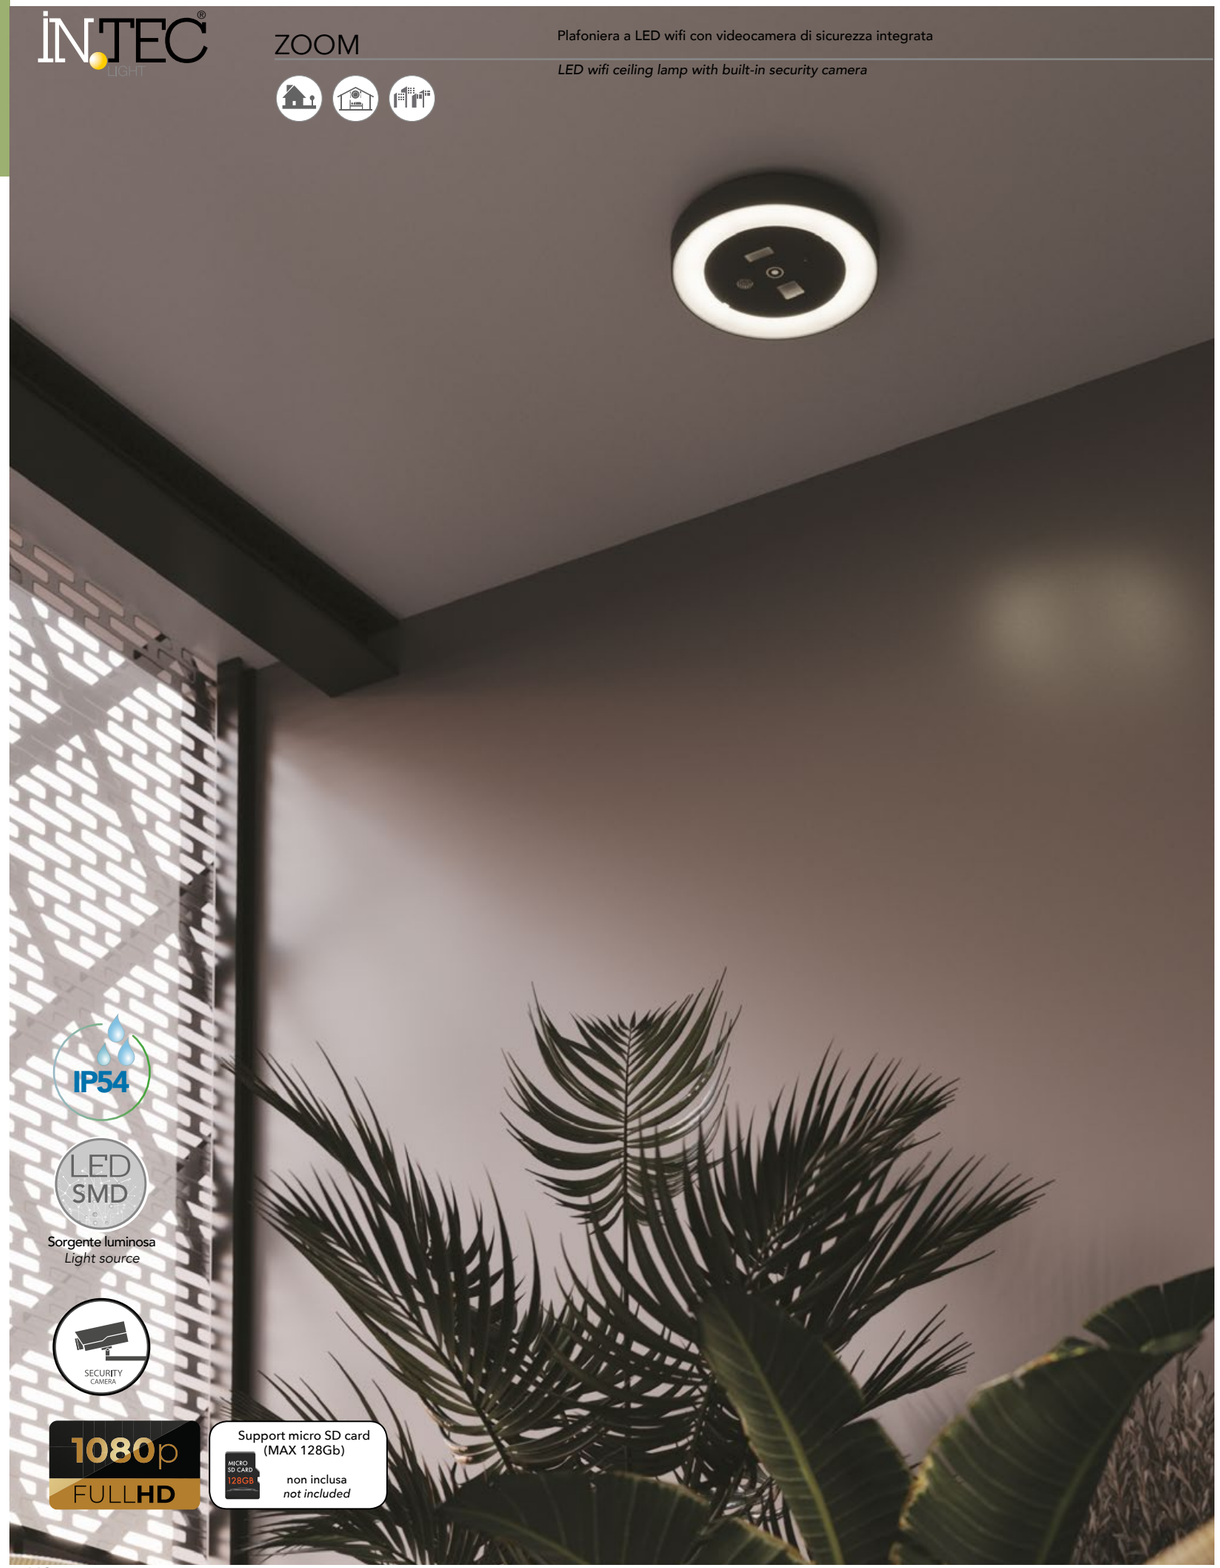

SMART INTEC
Wi-Fi

ZOOM

CONTROL SYSTEM
EASY INSTALLATION

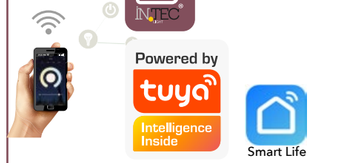

COMPATIBLE WITH
AMAZON ECHO SHOW
GOOGLE CHROME CAST

Materiale Alluminio+PC	**Material** Aluminium+PC
Colore Antracite goffrato	**Colour** *Embossed anthracite*
Driver integrato	**Driver** Built-in
Sorgente luminosa LED SMD 30W	**Light source** LED SMD 30W
Temperatura colore 4000K	**Color temperature** 4000K
Flusso luminoso 1800 Lm	**Luminous flux** 1800 Lm
Angolo di luce 110°	**Beam angle** 110°
CRI >85	**CRI** >85
Grado IK IK08	**IK degree** IK08



LED-ZOOM-INT 8031414877874	30W	PF 0,95

Misure - size
dimensioni in mm - size mm











Tipo di sensore video - Video sensor type	1/2,9" CMOS
Pixel	2.0 Mega
Illuminazione minima - Min illuminance	Color 0.10lux @F2.0, black and white 0.01lux @F2.0
Angolo vista camera - Camera view angle	135°
Otturatore - Shutter	1/25-1/100,000 per second
Infrarossi - IR	High power LED with ICR
WDR	Digital WDR
Video compression standard	H.264
Video compression standard	32Kbps - 2Mbps
Risoluzione video - Max picture size	1920x1080
Frequenza fotogrammi - Frame rate	1-20 per second
Audio	Full duplex audio (doppio sistema di comunicazione)
Memoria - Storage	Support SD card (MAX 128Gb) Cloud storage NVR
Impostazione immagine - Image setting	Support HD/SD; support mirror
Reset	Support
Controllo della luce - Lighting control	Support manual, sensor, plan switch light (gestione accensioni)
Interfaccia di protocollo - Interface protocol	Private
Comunicazione di protocollo - Communication protocol	TCP/IP, HTTP, DHCP, DNS, RTSP
Funzioni generali - General function	Dual stream, password protection
Wi-Fi	IEEE802.11b/g/n
PIR	Support PIR and motion detection



TUTOR

Plafoniera a LED wifi

LED wifi ceiling lamp

SMART INTEC
Wi-Fi

IP54

LED SMD

Sorgente luminosa
Light source

TUTOR

Materiale
Alluminio + PMMA

Colore
antracite

Driver
incluso

Sorgente luminosa
LED SMD 10W

Temperatura colore

CCT

Flusso luminoso
600 Lm

Angolo di luce
120°

CRI
>80

Grado IK
IK08

Material
Aluminium+ PMMA

Colour
anthracite

Driver
included

Light source
LED SMD 10W

Color temperature

CCT

Luminous flux
600 Lm

Beam angle
120°

CRI
>80

IK degree
IK08

CE EMC



LED-TUTOR-INT 8031414870165	10W

Misure
dimensioni in mm





VERTIGO

Plafoniera in cemento bianco o grigio

Concrete ceiling lamp white or gray

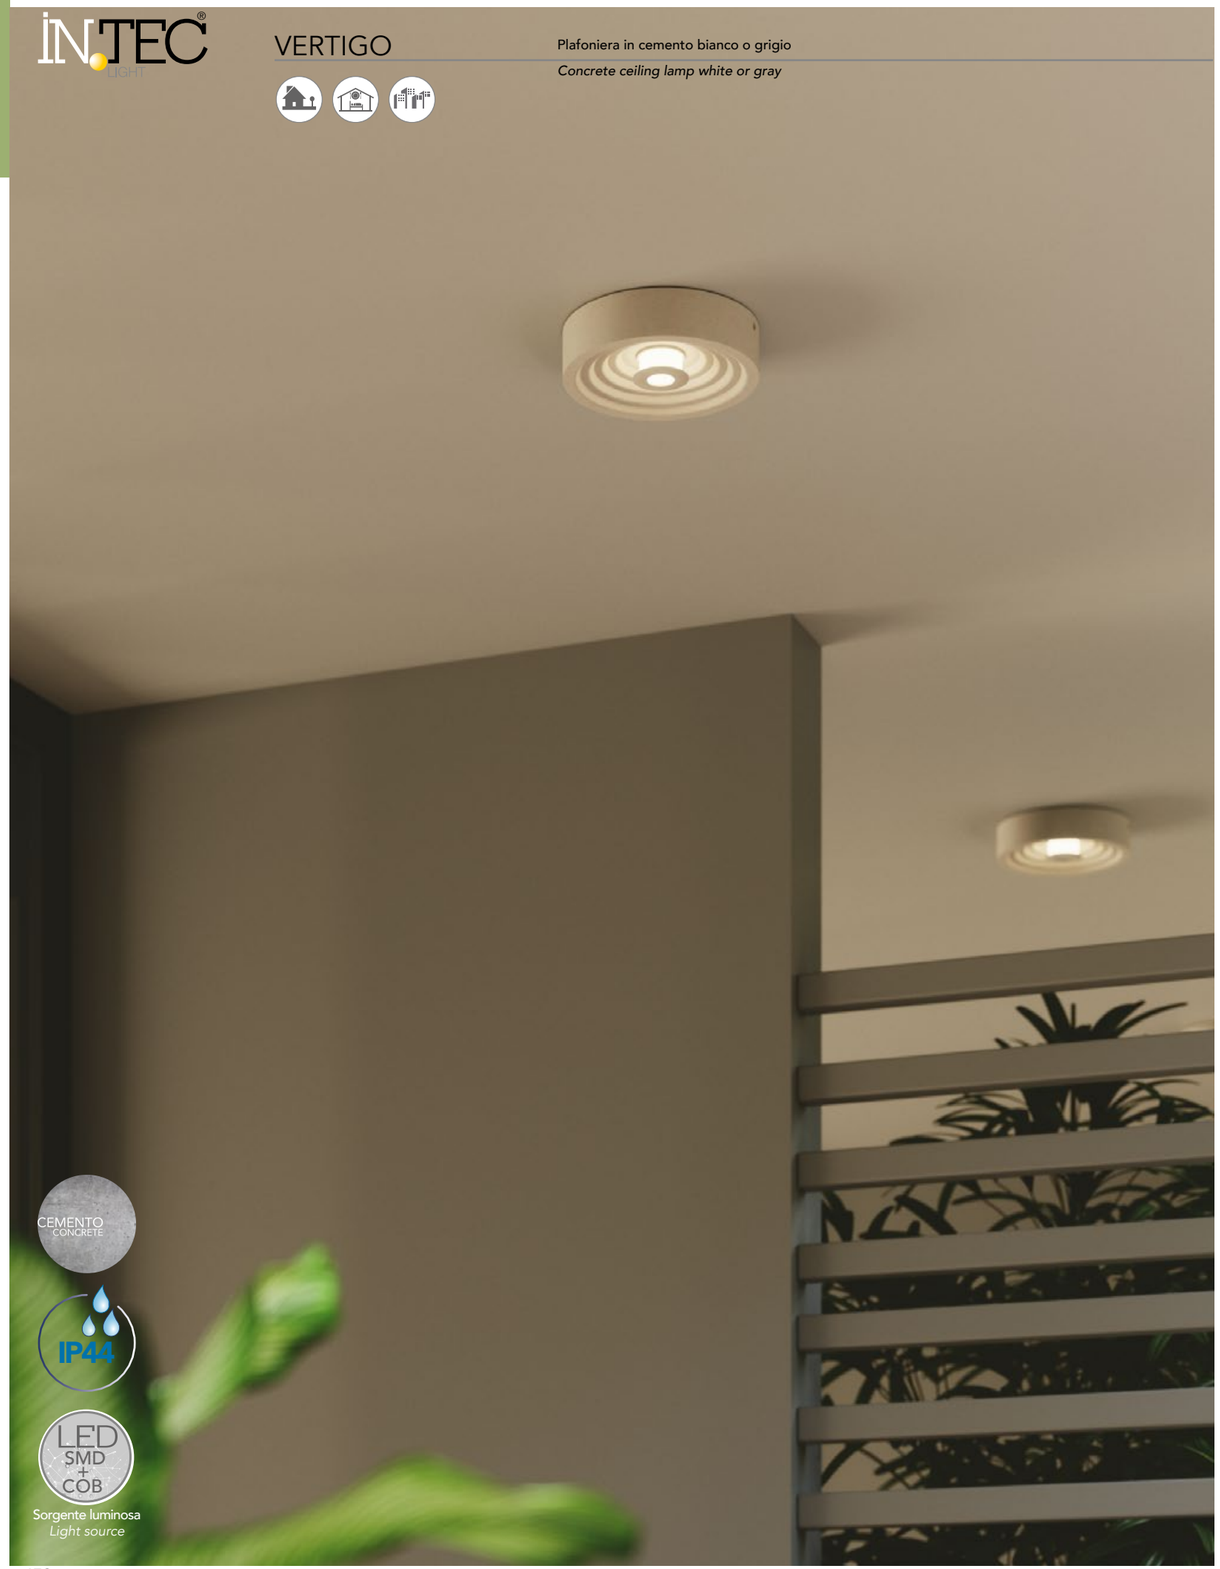

Materiale	**Material**
Cemento	Concrete
Colore	**Colour**
Bianco - grigio	White - grey
Driver	**Driver**
incluso	included
Sorgente luminosa	**Light source**
LED SMD 10W	LED SMD 10W
Temperatura colore	**Color temperature**
4000K	4000K
Flusso luminoso	**Luminous flux**
500 Lm	500 Lm
Angolo di luce	**Beam angle**
120°	120°
CRI	**CRI**
>80	>80



LED-VERTIGO-R23 **10W**
8031414867141

Connettore IP65 incluso
IP65 connector included

Misure - size
dimensioni in mm - size mm





LED-VERTIGO-Q23 **10W**
8031414867134

Connettore IP65 incluso
IP65 connector included

Misure - size
dimensioni in mm - size mm



CITIZEN

Plafoniera in alluminio nelle versioni bianco, nero o corten

Ceiling wall lamp black, white or corten finish

IP54

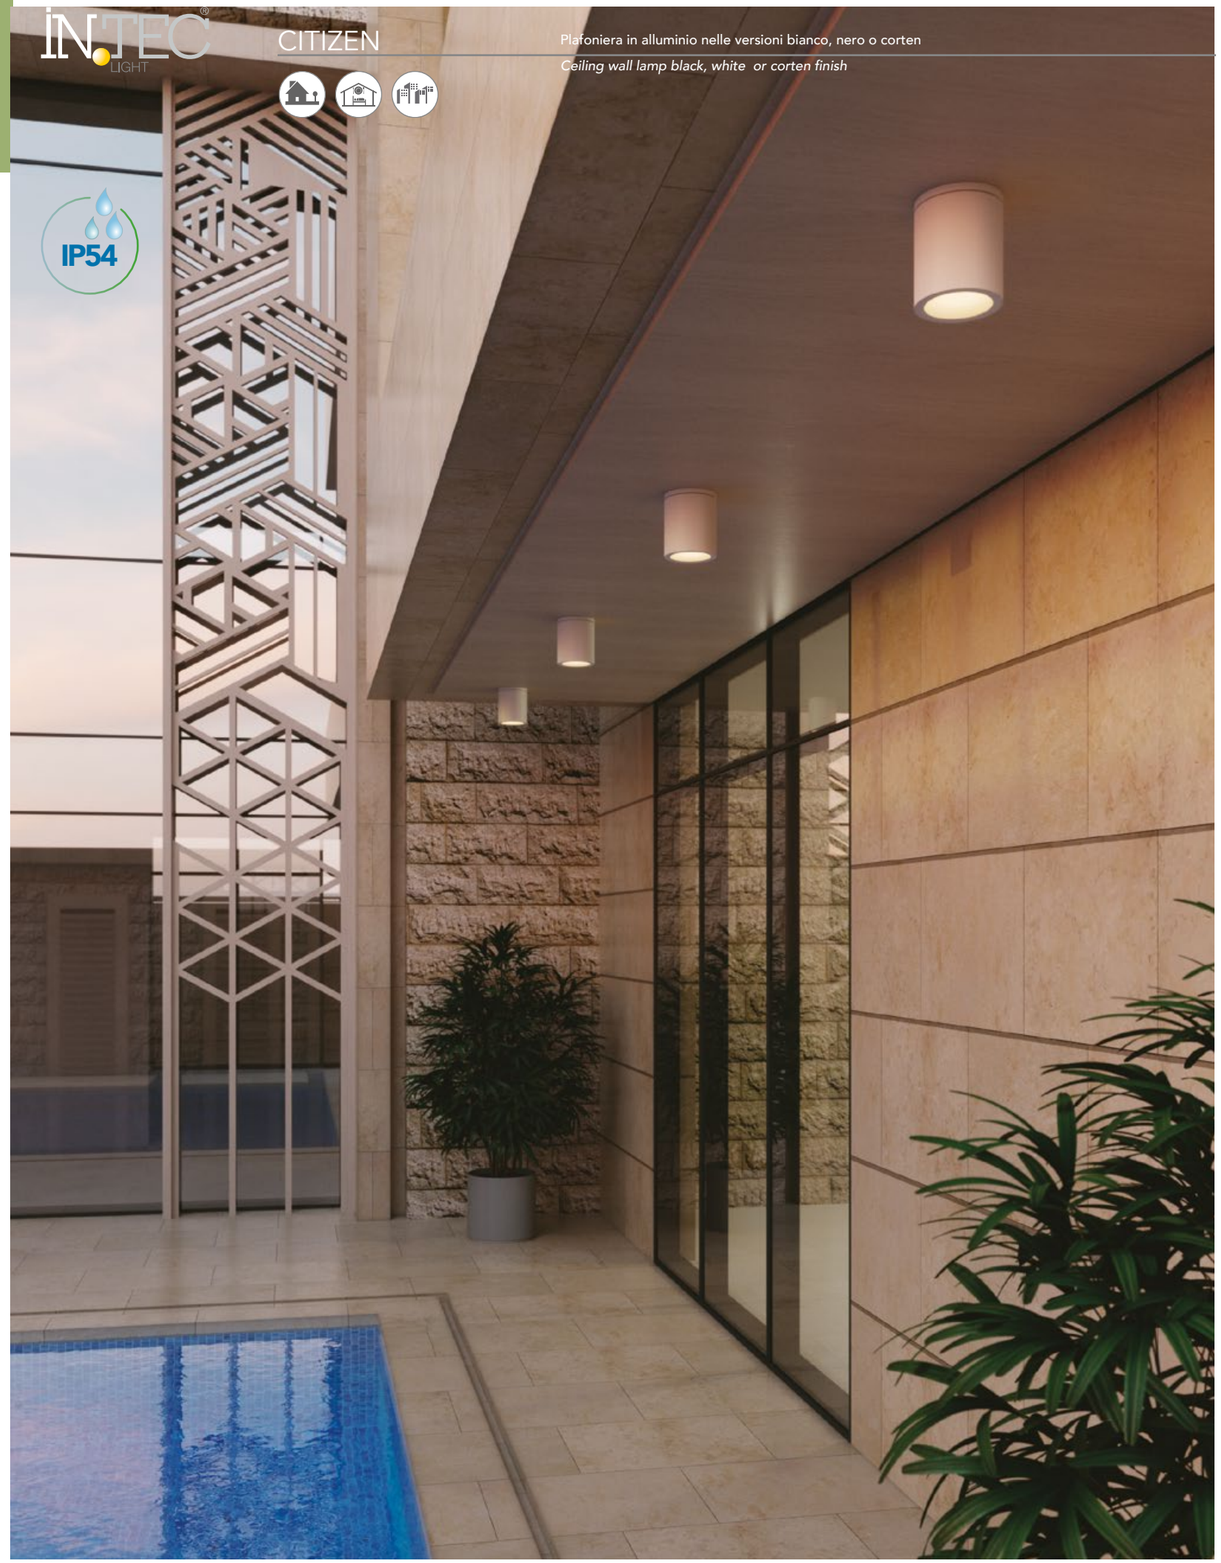



I-CITIZEN-Q1-NER 8031414882939		1XE27
I-CITIZEN-Q1-BRO 8031414882915		1XE27
I-CITIZEN-Q1-BCO 8031414882922		1XE27

Lampadina non inclusa
Light bulb not included

Misure - size
dimensioni in mm - size mm



E27
Attacco sorgente
Light Source



I-CITIZEN-R1-NER 8031414882908		1XE27
I-CITIZEN-R1-BRO 8031414882885		1XE27
I-CITIZEN-R1-BCO 8031414882892		1XE27

Lampadina non inclusa
Light bulb not included

Misure - size
dimensioni in mm - size mm



E27
Attacco sorgente
Light Source

CAPRI

Plafoniera LED integrato, in termoplastica bianco con diffusore trasparente effetto diamantato

Thermoplastic LED ceiling lamp with transparent diamond effect diffuser



IP65

LED SMD

Sorgente luminosa
Light source

Materiale
Termoplastica

Driver
integrato

Sorgente luminosa
LED SMD 20W, 30W

Temperatura colore
4000K

Flusso luminoso
2000 Lm - 3000 Lm

Angolo di luce
100°

CRI
>80

Grado IK
IK06

Material
Thermoplastic

Driver
Built-in

Light source
LED SMD 20W, 30W

Color temperature
4000K

Luminous flux
2000 Lm - 3000 Lm

Beam angle
100°

CRI
>80

IK degree
IK06



LED-CAPRI-S-BCO
8031414883585
20W-2000 LM

Misure - size
dimensioni in mm - size mm



LED-CAPRI-L-BCO
8031414883592
30W- 3000 LM

Misure - size
dimensioni in mm - size mm



ISCHIA

Plafoniera LED integrato, in termoplastica bianco con diffusore trasparente effetto diamant

Thermoplastic LED ceiling lamp with transparent diamond effect diffuser

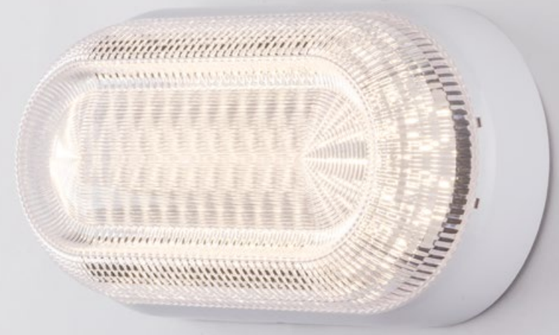

IP65

LED SMD

Sorgente luminosa
Light source

Materiale
Termoplastica

Driver
integrato

Sorgente luminosa
LED SMD 20W

Temperatura colore
4000K

Flusso luminoso
2000 Lm

Angolo di luce
100°

CRI
>80

Grado IK
IK06

Material
Thermoplastic

Driver
Built-in

Light source
LED SMD 20W

Color temperature
4000K

Luminous flux
2000 Lm

Beam angle
100°

CRI
>80

IK degree
IK06



LED-ISCHIA-L-BCO
8031414883608
20W-2000 LM

Misure - size
dimensioni in mm - size mm





SENSITIVE

Plafoniera LED integrato con sensore di movimento materiale base PP bianco o antracite con diffusore bianco PC

LED ceiling lamp with motion sensor PP base white or anthracite colour with white pc diffuser



IP54

LED SMD

Sorgente luminosa
Light source

Materiale
PP+PC
Driver
integrato
Sorgente luminosa
LED SMD 14W
Temperatura colore
3000K - 4000K
Flusso luminoso
1000 Lm
Angolo di luce
120°
CRI
>80
Grado IK
IK06

Material
PP+PC
Driver
Built-in
Light source
LED SMD 14W
Color temperature
3000K - 4000K
Luminous flux
1000 Lm
Beam angle
120°
CRI
>80
IK degree
IK06

LED-SENSITIVE-BCO 8031440361750		14W
LED-SENSITIVE-ANT 8031440361743		14W
LED-SENSITIVE-C BCO 8031414876815		14W

Misure - size
dimensioni in mm - size mm



Accessori inclusi
Accessory included

sensore di movimento regolabile
adjustable motion sensor



EXTRA

Plafoniera LED integrato materiale base PP bianco o antracite con diffusore bianco PC adatte ad installazione con impianto canaline esterne

PP built-in LED ceiling lamp, white or anthracite colour with white PC diffuser fit for surface mount cable ducts connections



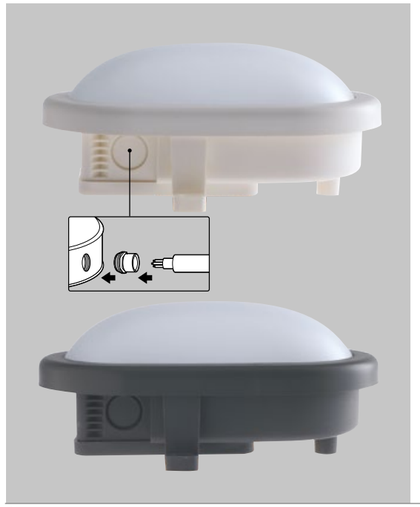

Materiale
PP+PC
Driver
integrato
Sorgente luminosa
LED SMD 10W
Temperatura colore
4000K
Flusso luminoso
700 Lm
Angolo di luce
120°
CRI
>80
Grado IK
IK06

Material
PP+PC
Driver
Built-in
Light source
LED SMD 10W
Color temperature
4000K
Luminous flux
700 Lm
Beam angle
120°
CRI
>80
IK degree
IK06

LED-EXTRA-BCO 8031440361071		10W
LED-EXTRA-ANT 8031440361064		10W

Misure - size
dimensioni in mm - size mm



SHELLY

Plafoniera LED integrato, base in Policarbonato bianco o antracite diffusore in policarbonato bianco

Polycarbonate built-in LED ceiling lamp in white or anthracite colour with white PC diffuser



Materiale
PC+PC
Driver
integrato
Sorgente luminosa
LED SMD 20W
Temperatura colore
3000K - 4000K
Flusso luminoso
1600 Lm - 1200 Lm
Angolo di luce
120°
CRI
>80
Grado IK
IK06

Material
PC+PC
Driver
Built-in
Light source
LED SMD 20W
Color temperature
3000K - 4000K
Luminous flux
1600 Lm - 1200 Lm
Beam angle
120°
CRI
>80
IK degree
IK06



LED-SHELLY-Q-L BCO 8031414862016		20W-1600 LM
LED-SHELLY-Q-L ANT 8031414862023		20W-1600 LM
LED-SHELLY-Q-LC BCO 8031414876747		20W-1600 LM
LED-SHELLY-Q-S BCO 8031414085507		15W-1200 LM
LED-SHELLY-Q-S ANT 8031414862009		15W-1200 LM
LED-SHELLY-Q-SC BCO 8031414876730		15W-1200 LM

Misure - size
dimensioni in mm - size mm



Misure - size
dimensioni in mm - size mm



SHELLY

Plafoniera LED integrato con sensore, base in Policarbonato bianco o antracite diffusore in policarbonato bianco

Polycarbonate built-in LED ceiling lamp with sensor in white or anthracite colour with white PC diffuser



IP65

LED SMD

Sorgente luminosa
Light source



Doppio sistema di installazione
Double installation system

Materiale
PC+PC
Driver
integrato
Sorgente luminosa
LED SMD 20W
Temperatura colore
4000K
Flusso luminoso
1600 Lm
Angolo di luce
120°
CRI
>80
Grado IK
IK06

Material
PC+PC
Driver
Built-in
Light source
LED SMD 20W
Color temperature
4000K
Luminous flux
1600 Lm
Beam angle
120°
CRI
>80
IK degree
IK06

LED-SHELLY-Q-MW BCO 8031414862153		20W
LED-SHELLY-Q-MW ANT 8031414862177		20W

Misure - size
dimensioni in mm - size mm



Accessori inclusi
Accessory included

sensore di movimento preimpostato
pre-set motion sensor



SHELLY

Plafoniera LED integrato, base in Policarbonato bianco o antracite diffusore in policarbonato bianco

Polycarbonate built-in LED ceiling lamp in white or anthracite colour with white PC diffuser



IP65

LED SMD

Sorgente luminosa
Light source



Doppio sistema di installazione
Double installation system

Materiale
PC+PC
Driver
integrato
Sorgente luminosa
LED SMD 20W, 15W
Temperatura colore
3000K - 4000K
Flusso luminoso
1600 Lm - 1200 Lm
Angolo di luce
120°
CRI
>80
Grado IK
IK06

Material
PC+PC
Driver
Built-in
Light source
LED SMD 20W, 15W
Color temperature
3000K - 4000K
Luminous flux
1600 Lm - 1200 Lm
Beam angle
120°
CRI
>80
IK degree
IK06



LED-SHELLY-L BCO 8031440351713		20W-1600 LM
LED-SHELLY-L ANT 8031440351690		20W-1600 LM
LED-SHELLY-LC BCO 8031414876716		20W-1600 LM
LED-SHELLY-S BCO 8031440351720		15W-1200 LM
LED-SHELLY-S ANT 8031440351706		15W-1200 LM
LED-SHELLY-SC BCO 8031414876761		15W-1200 LM

Misure - size
dimensioni in mm - size mm



Misure - size
dimensioni in mm - size mm





EVER

Plafoniera LED integrato, base in Policarbonato bianco o antracite diffusore in policarbonato bianco

Polycarbonate built-in LED ceiling lamp in white or anthracite colour with white PC diffuser

IP65

LED SMD

Sorgente luminosa
Light source



Doppio sistema di installazione
Double installation system





Materiale
PC+PC
Driver
integrato

Sorgente luminosa
LED SMD 30W, 15W

Temperatura colore
3000K - 4000K
Flusso luminoso
2400 Lm - 1200 Lm
Angolo di luce
120°
CRI
>80
Grado IK
IK06

Material
PC+PC
Driver
Built-in

Light source
LED SMD 30W, 15W

Color temperature
3000K - 4000K
Luminous flux
2400 Lm - 1200 Lm
Beam angle
120°
CRI
>80
IK degree
IK06

LED-EVER-Q-L BCO 8031414862276		30W-2400 LM	PF 0.90
LED-EVER-Q-L ANT 8031414862283		30W-2400 LM	PF 0.90
LED-EVER-Q-LC BCO 8031414876785		30W-2400 LM	PF 0.90
LED-EVER-Q-S BCO 8031414862238		15W-1200 LM	
LED-EVER-Q-S ANT 8031414862269		15W-1200 LM	
LED-EVER-Q-SC BCO 8031414876778		15W-1200 LM	

Misure - size
dimensioni in mm - size mm



Misure - size
dimensioni in mm - size mm



EVER

Plafoniera LED integrato, base in Policarbonato bianco o antracite diffusore in policarbonato bianco

Polycarbonate built-in LED ceiling lamp in white or anthracite colour with white PC diffuser



IP65

LED SMD

Sorgente luminosa
Light source



Materiale
PC+PC

Driver
integrato

Sorgente luminosa
LED SMD 20W, 15W

Temperatura colore
3000K - 4000K

Flusso luminoso
1600 Lm - 1200 Lm

Angolo di luce
120°

CRI
>80

Grado IK
IK06

Material
PC+PC

Driver
Built-in

Light source
LED SMD 20W, 15W

Color temperature
3000K - 4000K

Luminous flux
1600 Lm - 1200 Lm

Beam angle
120°

CRI
>80

IK degree
IK06



LED-EVER-L BCO 8031440351676		20W-1600 LM
LED-EVER-L ANT 8031440351645		20W-1600 LM
LED-EVER-LC BCO 8031414876754		20W-1600 LM
LED-EVER-S BCO 8031440351683		15W-1200 LM
LED-EVER-S ANT 8031440351638		15W-1200 LM
LED-EVER-SC BCO 8031414876808		15W-1200 LM

Misure - size
dimensioni in mm - size mm



Misure - size
dimensioni in mm - size mm



EVER

Plafoniera LED integrato materiale base PC bianco o silver con diffusore bianco PC

Polycarbonate built-in LED ceiling lamp PC base white or silver with white PC diffuser



IP65

LED SMD

Sorgente luminosa
Light source



Materiale
PC+PC

Driver
integrato

Sorgente luminosa
LED SMD 30W

Temperatura colore
3000K - 4000K

Flusso luminoso
2400 Lm

Angolo di luce
120°

Power factor
PF 0,90

CRI
>80

Grado IK
IK06

Material
PC+PC

Driver
Built-in

Light source
LED SMD 30W

Color temperature
3000K - 4000K

Luminous flux
2400 Lm

Beam angle
120°

Power factor
PF 0,90

CRI
>80

IK degree
IK06



LED-EVER-XL-BCO 8031440355612		30W-2400 LM	PF 0.90
LED-EVER-XL-SIL 8031440355605		30W-2400 LM	PF 0.90
LED-EVER-XLC BCO 8031414876792		30W-2400 LM	PF 0.90

Misure - size
dimensioni in mm - size mm



EVER

Plafoniera LED integrato con sensore di movimento, base in Policarbonato bianco o silver diffusore in policarbonato bianco

Polycarbonate built-in LED ceiling lamp with motion sensor in white or silver colour with white PC diffuser

IP65

LED SMD

Sorgente luminosa
Light source





Materiale
PC+PC
Driver
integrato

Sorgente luminosa
LED SMD 30W

Temperatura colore
4000K

Flusso luminoso
2400 Lm

Angolo di luce
120°
Power factor
PF 0,90
CRI
>80

Grado IK
IK06

Material
PC+PC
Driver
Built-in

Light source
LED SMD 30W

Color temperature
4000K

Luminos flux
2400 Lm

Beam angle
120°
Power factor
PF 0,90
CRI
>80

IK degree
IK06

LED-EVER-XL-MW SIL 8031414862610		30W	PF 0.90
LED-EVER-XL-MW BCO 8031414862375		30W	PF 0.90

Misure - size
dimensioni in mm - size mm



Accessori inclusi
Accessory included

sensore di movimento regolabile
adjustable motion sensor



EVER

Plafoniera LED integrato materiale base PC bianco o antracite con diffusore bianco PC

Polycarbonate built-in LED ceiling lamp PC base white or anthracite with white PC diffuser

IP65

LED SMD

Sorgente luminosa
Light source





Materiale
PC+PC
Driver
integrato

Sorgente luminosa
LED SMD 30W, 20W

Temperatura colore
4000K

Flusso luminoso
2300 Lm - 1600 Lm
Angolo di luce
120°
CRI
>80

Grado IK
IK06

Material
PC+PC
Driver
Built-in

Light source
LED SMD 30W, 20W

Color temperature
4000K

Luminos flux
2300 Lm - 1600 Lm
Beam angle
120°
CRI
>80

IK degree
IK06

LED-EVER-XLP-BCO 8031440355636		30W-2300 LM	PF 0.90
LED-EVER-XLP-ANT 8031440355629		30W-2300 LM	PF 0.90

Misure - size
dimensioni in mm - size mm



LED-EVER-LP-BCO 8031440355650		20W-1600 LM
LED-EVER-LP-ANT 8031440355643		20W-1600 LM

Misure - size
dimensioni in mm - size mm





SMART INTEC
Wi-Fi

PICNIC

IP65

Dimming

Materiale
PC + PVC

Colore
Nero

Driver
integrato

Sorgente luminosa
LED SMD 0,5Wx10

Temperatura colore
RGB + CCT

Material
PC + PVC

Colour
Black

Driver
Built-in

Light source
LED SMD 0,5Wx10

Color temperature
RGB + CCT

Flusso luminoso
400 Lm

Angolo di luce
110°

Luminous flux
400 Lm

Beam angle
110°

CE EMC

I-PICNIC-INT 8031414884391	0,5WX10

Misure - size
dimensioni in mm - size mm

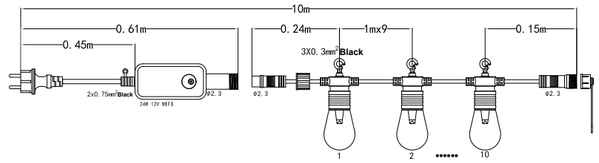

CONTROL SYSTEM
EASY INSTALLATION

SMART INTEC

Powered by tuya
Intelligence Inside

Smart Life

VOICE CONTROL
ALEXA E GOOGLE HOME

PICNIC

Stringa elettrificata E12 per esterno con cavo in PVC inclusiva di spina schuko e connettore modulabile

Light string E12 f PVC cable inclusive of schuko plug and modular connector



I-PICNIC-LED	25XE12
8031414884407	

Lampadina inclusa
Light bulb included

E12
Attacco sorgente
Source

Watt	Volt	Kelvin
0,3W	3V	3000

Easy Connection
max 1000W



Misure - size
dimensioni in mm - size mm

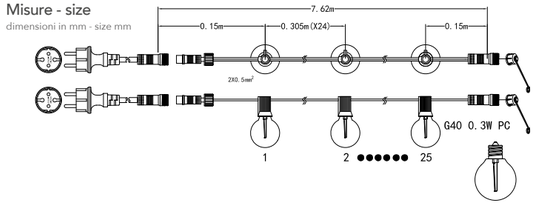



Stringa elettrificata E12 per esterno con cavo in PVC inclusiva di pannello solare

Light string E12 f PVC cable inclusive solar panel

I-PICNIC-SOLAR	25XE12
8031414884414	

Lampadina inclusa
Light bulb included

SOLAR

Watt	Volt	Kelvin
0,3W	3V	3000





Misure - size
dimensioni in mm - size mm

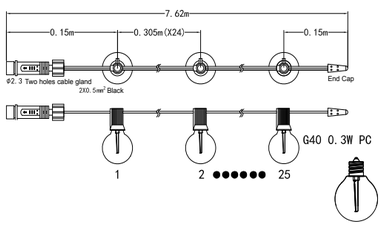



PICNIC

Stringa elettrificata E14 o E27 per esterno con cavo in gomma inclusiva di spina schuko e connettore modulabile

Light string E14 or E27 for outdoor rubber cable inclusive of schuko plug and modular connector







E27
Attacco sorgente
Source

I-PICNIC-E27	10XE27 MAX 25W
8031414862719	
I-PICNIC-E27-BCO	10XE27 MAX 25W
8031414043064	

Lampadina non inclusa
Light bulb not included

Misure - size
dimensioni in mm - size mm



E14
Attacco sorgente
Source

I-PICNIC-E14	10XE14 MAX 25W
8031414862726	
I-PICNIC-E14-BCO	10XE14 MAX 25W
8031414023745	

Lampadina non inclusa
Light bulb not included

Misure - size
dimensioni in mm - size mm



end-to-end
Easy Connection
max 1000W



WIZARD

Collezione in alluminio antracite, LED integrato RGB+CCT con funzione smart Wi-Fi, compatibili con dispositivi VOICE CONTROL

Aluminium collection anthracite colour built-in LED RGB+CCT with smart Wi-Fi function, compatible with VOICE CONTROL devices



SMART INTEC
Wi-Fi

WIZARD

Dimming

CONTROL SYSTEM
EASY INSTALLATION

SMART INTEC

Powered by tuya
Intelligence Inside

Smart Life

VOICE CONTROL
ALEXA E GOOGLE HOME

Materiale	**Material**
Alluminio+PC	Aluminium+PC
Colore	**Colour**
Antracite	*Anthracite*
Driver	**Driver**
integrato	Built-in
Sorgente luminosa	**Light source**
LED SMD 10W	LED SMD 10W
Temperatura colore	**Color temperature**
R G B + CCT	R G B + CCT
Flusso luminoso	**Luminous flux**
400 Lm	400 Lm
Angolo di luce	**Beam angle**
110°	110°
CRI	**CRI**
>80	>80
Grado IK	**IK degree**
IK08	IK08



LED-WIZARD-AP
8031414870172 — **10W**

Misure - size
dimensioni in mm - size mm





LED-WIZARD-P80
8031414870189 — **10W**

Misure - size
dimensioni in mm - size mm





DISCOVERY

Collezione in alluminio a LED integrato finitura antracite goffrato

Aluminium collection LED lamp anthracite embossed finish

Sorgente luminosa
Light source

DISCOVERY

Materiale Alluminio	**Material** Aluminium
Colore Antracite goffrato	**Colour** *Embossed anthracite*
Driver integrato	**Driver** Built-in
Sorgente luminosa LED SMD 15W	**Light source** LED SMD 15W
Temperatura colore 4000K	**Color temperature** 4000K
Flusso luminoso 960 Lm	**Luminous flux** 960 Lm
Angolo di luce 360°	**Beam angle** 360°
CRI >85	**CRI** >85
Grado IK IK08	**IK degree** IK08



LED-DISCOVERY-AP
8031414877836
13W - 960 LM

Misure - size
dimensioni in mm - size mm





LED-DISCOVERY-P65
8031414877850
13W - 960 LM

Misure - size
dimensioni in mm - size mm







LED-DISCOVERY-HUB
8031414877867
13W - 960 LM

2X max 15A 250V 2500W

Misure - size
dimensioni in mm - size mm



IDEM

Lampada in alluminio a LED integrato finitura atracite goffrato

Aluminium collection anthracite colour built-in LED

IP44

LED SMD

Sorgente luminosa
Light source

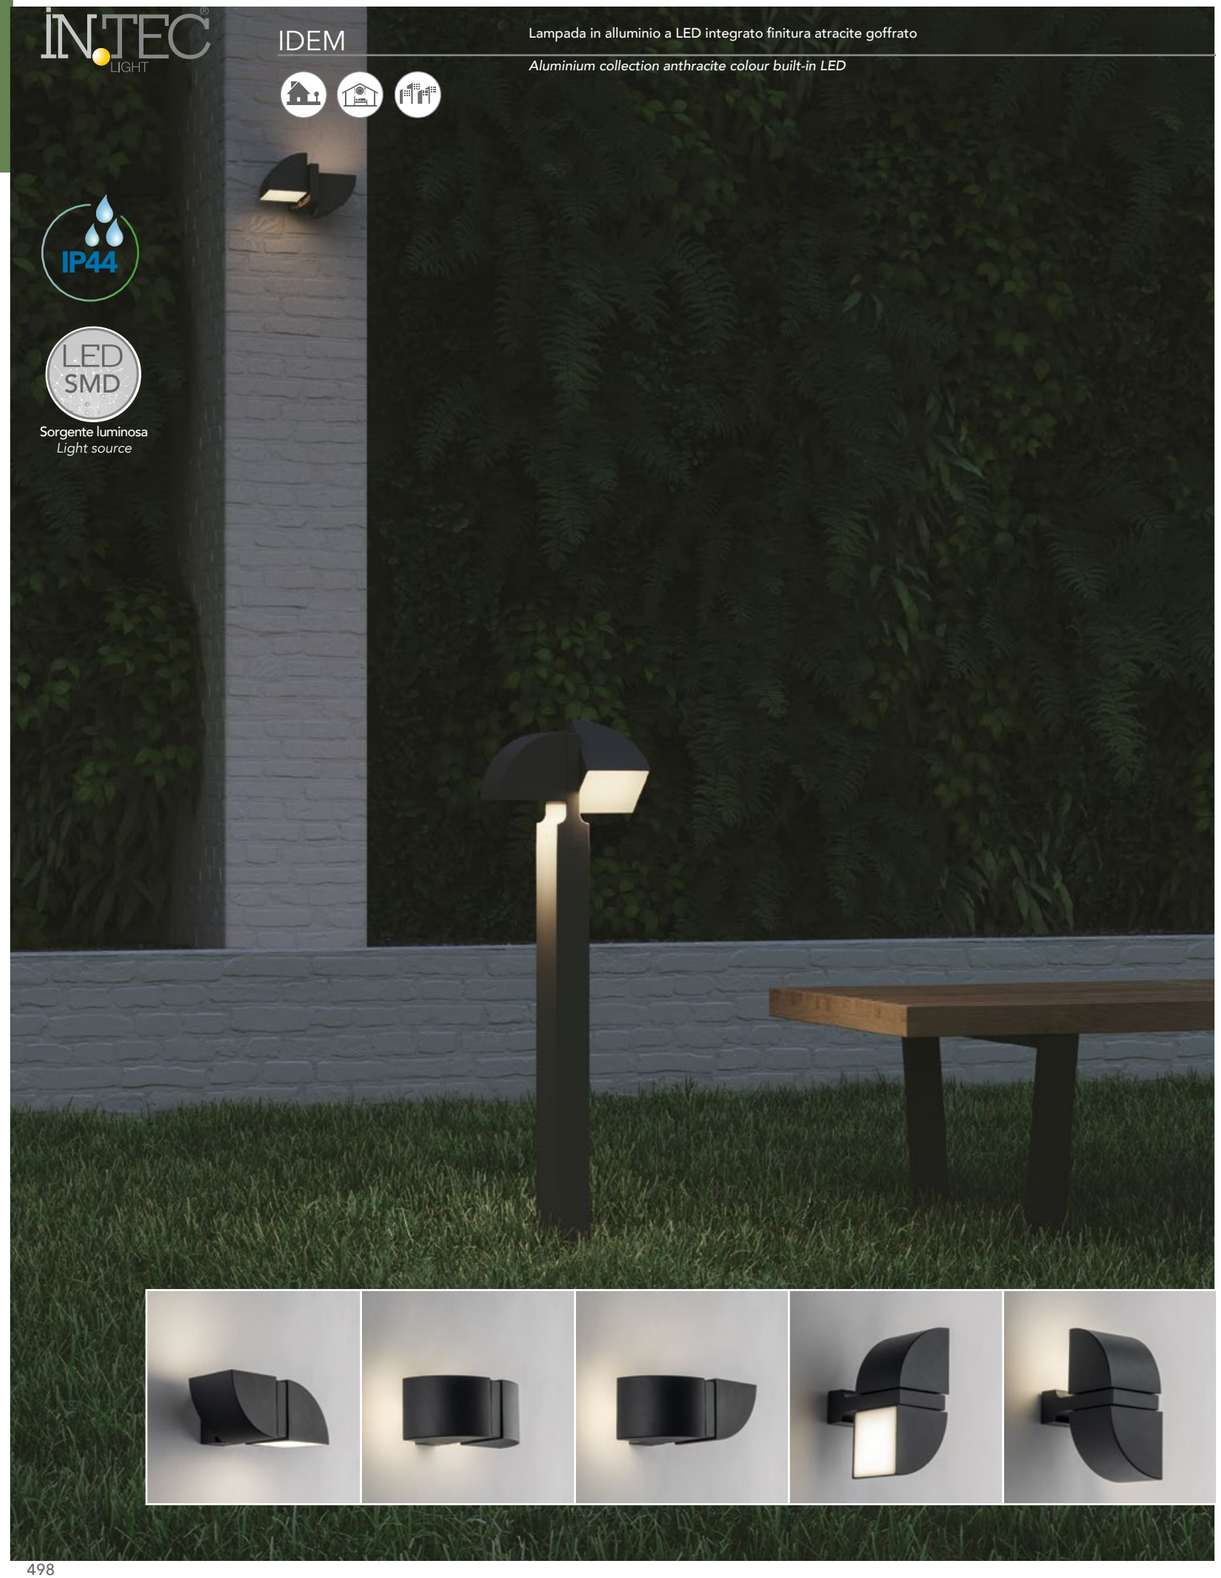

Materiale
Alluminio

Colore
Antracite goffrato

Driver
integrato

Sorgente luminosa
LED SMD 8W

Temperatura colore
4000K

Flusso luminoso
970 Lm

Angolo di luce
120°

CRI
>80

Grado IK
IK07

Material
Aluminium

Colour
Embossed anthracite

Driver
built-in

Light source
LED SMD 8W

Color temperature
4000K

Luminous flux
970 Lm

Beam angle
120°

CRI
>80

IK degree
IK07



LED-IDEM-AP
8031414883103
8W - 970 LM

Misure - size
dimensioni in mm - size mm





LED-IDEM-P1
8031414883110
8W - 970 LM

Misure - size
dimensioni in mm - size mm



CE EMC

REVERSE

Lampada in alluminio a LED integrato finitura atracite goffrato

Aluminium collection anthracite colour built-in LED

IP44

LED SMD

Sorgente luminosa
Light source





Materiale
Alluminio

Colore
Antracite goffrato

Driver
integrato

Sorgente luminosa
LED SMD 7,5W - 5,3W

Temperatura colore
4000K

Flusso luminoso
814 Lm - 484 Lm

Angolo di luce
120°

CRI
>80

Grado IK
IK07

Material
Aluminium

Colour
Embossed anthracite

Driver
built-in

Light source
LED SMD 7,5W - 5,3W

Color temperature
4000K

Luminous flux
814 Lm - 484 Lm

Beam angle
120°

CRI
>80

IK degree
IK07

LED-REVERSE-AP
8031414883127
7,5W - 814LM

Misure - size
dimensioni in mm - size mm





LED-REVERSE-P1
8031414883134
5,3W - 484 LM

Misure - size
dimensioni in mm - size mm



SINTESI

Lampada in alluminio a LED integrato finitura bianco o nero goffrato

Built in aluminium LED lamp white or black embossed finish

Materiale
Alluminio

Material
Aluminium

Colore
Antracite goffrato - bianco goffrato

Colour
Embossed anthracite - embossed white

Driver
integrato

Driver
built-in

Sorgente luminosa
LED SMD 6W

Light source
LED SMD 6W

Temperatura colore
4000K

Color temperature
4000K

Flusso luminoso
390 Lm

Luminous flux
390 Lm

Angolo di luce
100°

Beam angle
100°

CRI
>80

CRI
>80 IK07

Grado IK
IK07

IK degree

IP44

LED SMD
Sorgente luminosa
Light source



LED-SINTESI-AP NERO 8031414862221	■	6W
LED-SINTESI-AP BCO 8031414862207	□	6W

Misure - size
dimensioni in mm - size mm





LED-SINTESI-P NERO 8031414862252	■	6W
LED-SINTESI-P BCO 8031414862245	□	6W

Misure - size
dimensioni in mm - size mm



CE EMC

ALYSON

Lanterna in alluminio pressofuso LED integrato colore nero o bianco goffrato diffusore in policarbonato

Die cast aluminium lantern built-in LED black or white embossed finish with PC diffuser

Materiale
Alluminio

Material
Aluminium

Colore
Antracite goffrato - bianco goffrato

Colour
Embossed anthracite - embossed white

Driver
integrato

Driver
built-in

Sorgente luminosa
LED SMD 12W

Light source
LED SMD 12W

Temperatura colore
4000K

Color temperature
4000K

Flusso luminoso
800 Lm

Luminous flux
800 Lm

Angolo di luce
120°

Beam angle
120°

CRI
>80

CRI
>80

Grado IK
IK07

IK degree
IK07

IP44

LED SMD
Sorgente luminosa
Light source



LANT-ALYSON/AP 8031440361552	■	12W
LANT-ALYSON/AP BCO 8031440361514	□	12W

Misure - size
dimensioni in mm - size mm





LANT-ALYSON/P1 8031440361569	■	12W
LANT-ALYSON/P1 BCO 8031440361538	□	12W

Misure - size
dimensioni in mm - size mm



CE EMC

BITT

Lampada in alluminio a LED integrato finitura atracite e corten goffrato

Aluminium collection anthracite and corten colour built-in LED

IP65

LED SMD

Sorgente luminosa
Light source

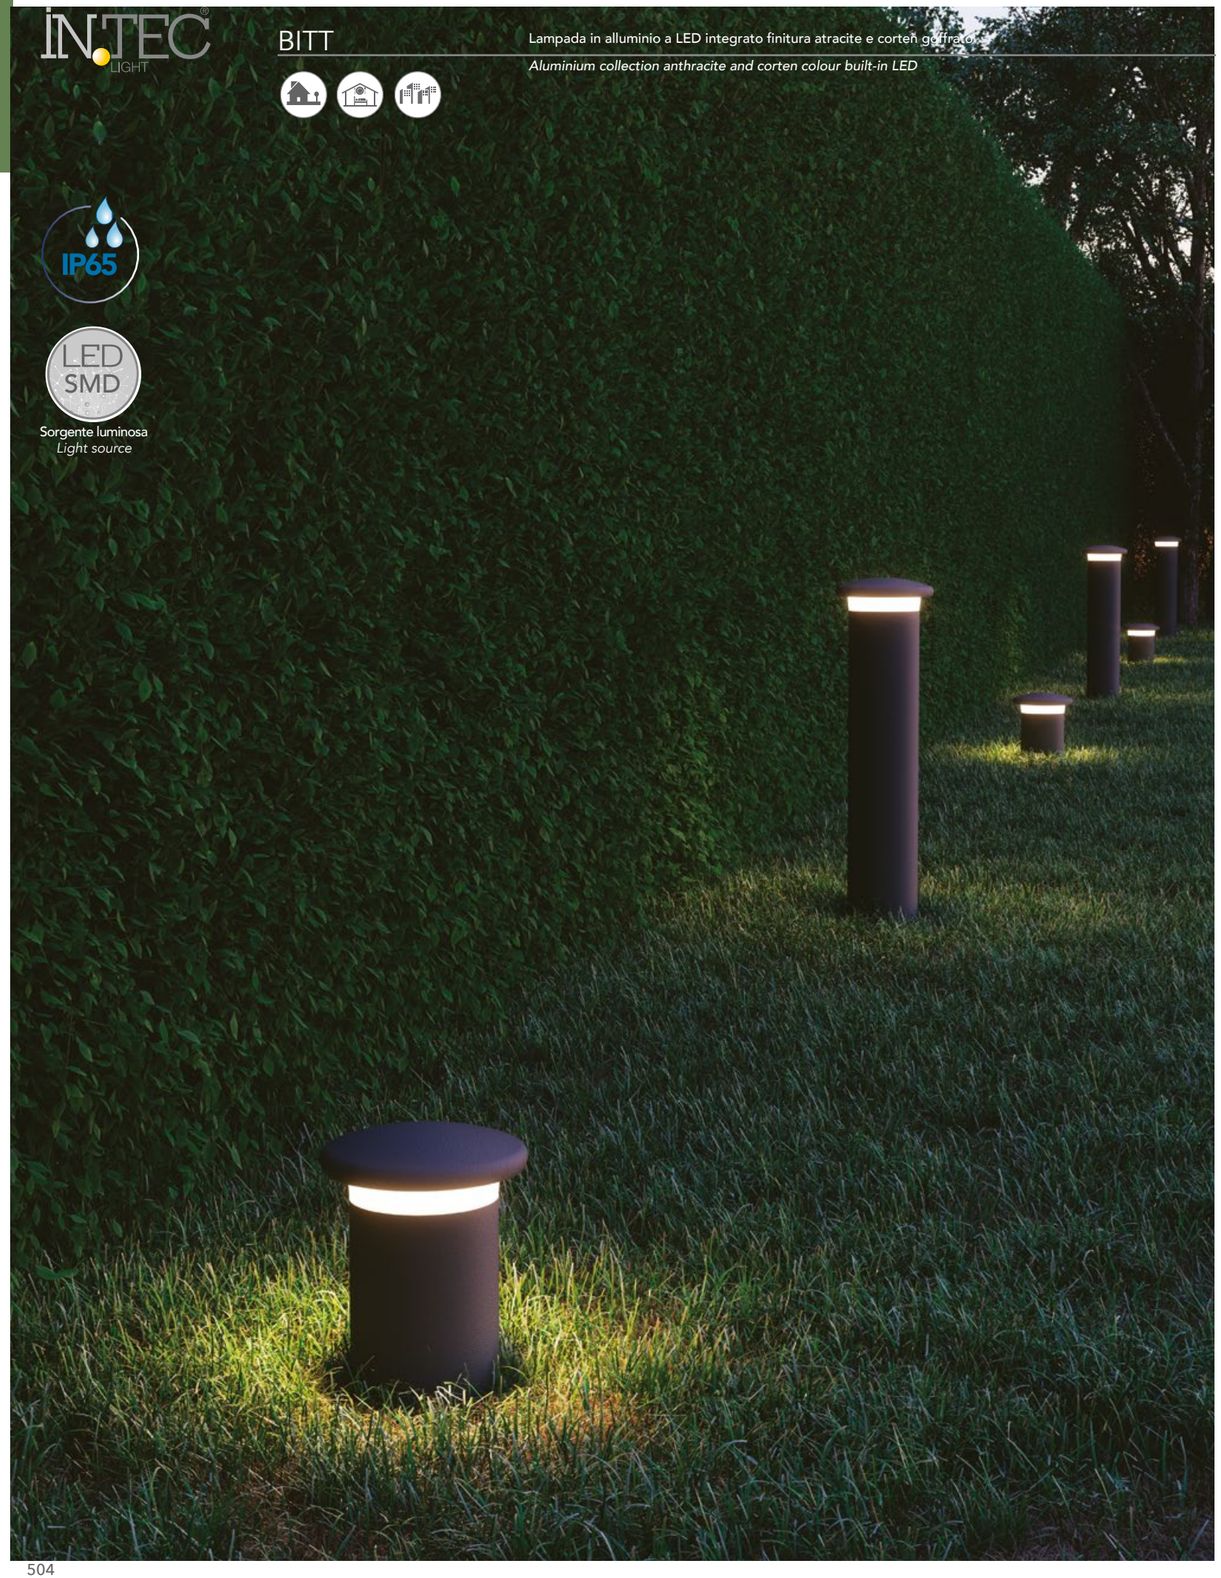





Materiale
Alluminio

Colore
Antracite - corten

Driver
integrato

Sorgente luminosa
LED SMD 10W

Temperatura colore
4000K

Flusso luminoso
1284 Lm

Angolo di luce
120°

CRI
>80

Grado IK
IK07

Material
Aluminium

Colour
Anthracite - Korten

Driver
built-in

Light source
LED SMD 10W

Color temperature
4000K

Luminous flux
1284 Lm

Beam angle
120°

CRI
>80

IK degree
IK07

LED-BITT-P28-ANT 8031414883011		**10W**
LED-BITT-P28-BRO 8031414883028		**10W**

Misure - size
dimensioni in mm - size mm



LED-BITT-P76-ANT 8031414883035		**10W**
LED-BITT-P76-BRO 8031414883042		**10W**

Misure - size
dimensioni in mm - size mm



NISMO

Collezione in alluminio a LED integrato finitura bianco goffrato

Aluminium collection LED lamp white embossed finish

Materiale
Alluminio

Material
Aluminium

Colore
Bianco goffrato

Colour
Embossed white

Driver
integrato

Driver
Built-in

Sorgente luminosa
LED SMD 13W, 10W

Light source
LED SMD 13W, 10W

Temperatura colore
4000K

Color temperature
4000K

Flusso luminoso
1020 Lm - 560 Lm

Luminous flux
1020 Lm - 560 Lm

Angolo di luce
120°

Beam angle
120°

CRI >85 **Grado IK** IK09

CRI >85 **IK degree** IK09

IP54

LED SMD

Sorgente luminosa
Light source



LED-NISMO-AP 8031440361224	13W	1020 Lm

Misure - size
dimensioni in mm - size mm





LED-NISMO-P60 8031440361231	13W	1020 Lm

Misure - size
dimensioni in mm - size mm



CE EMC

STATION

Collezione in acciaio finitura antracite. Diffusore in policarbonato bianco.
Stainless steel collection anthracite finish. White PC diffuser.

IP44



E27
Attacco sorgente
Source

I-STATION-E27-SC2 8031414879571	1XE27 MAX 60W

Lampadina non inclusa
Light bulb not included

Plug 2X max 15A 250V 2500W

Misure - size
dimensioni in mm - size mm







I-STATION-SC2 8031414879564

Plug 2X max 15A 250V 2500W

Misure - size
dimensioni in mm - size mm



CE

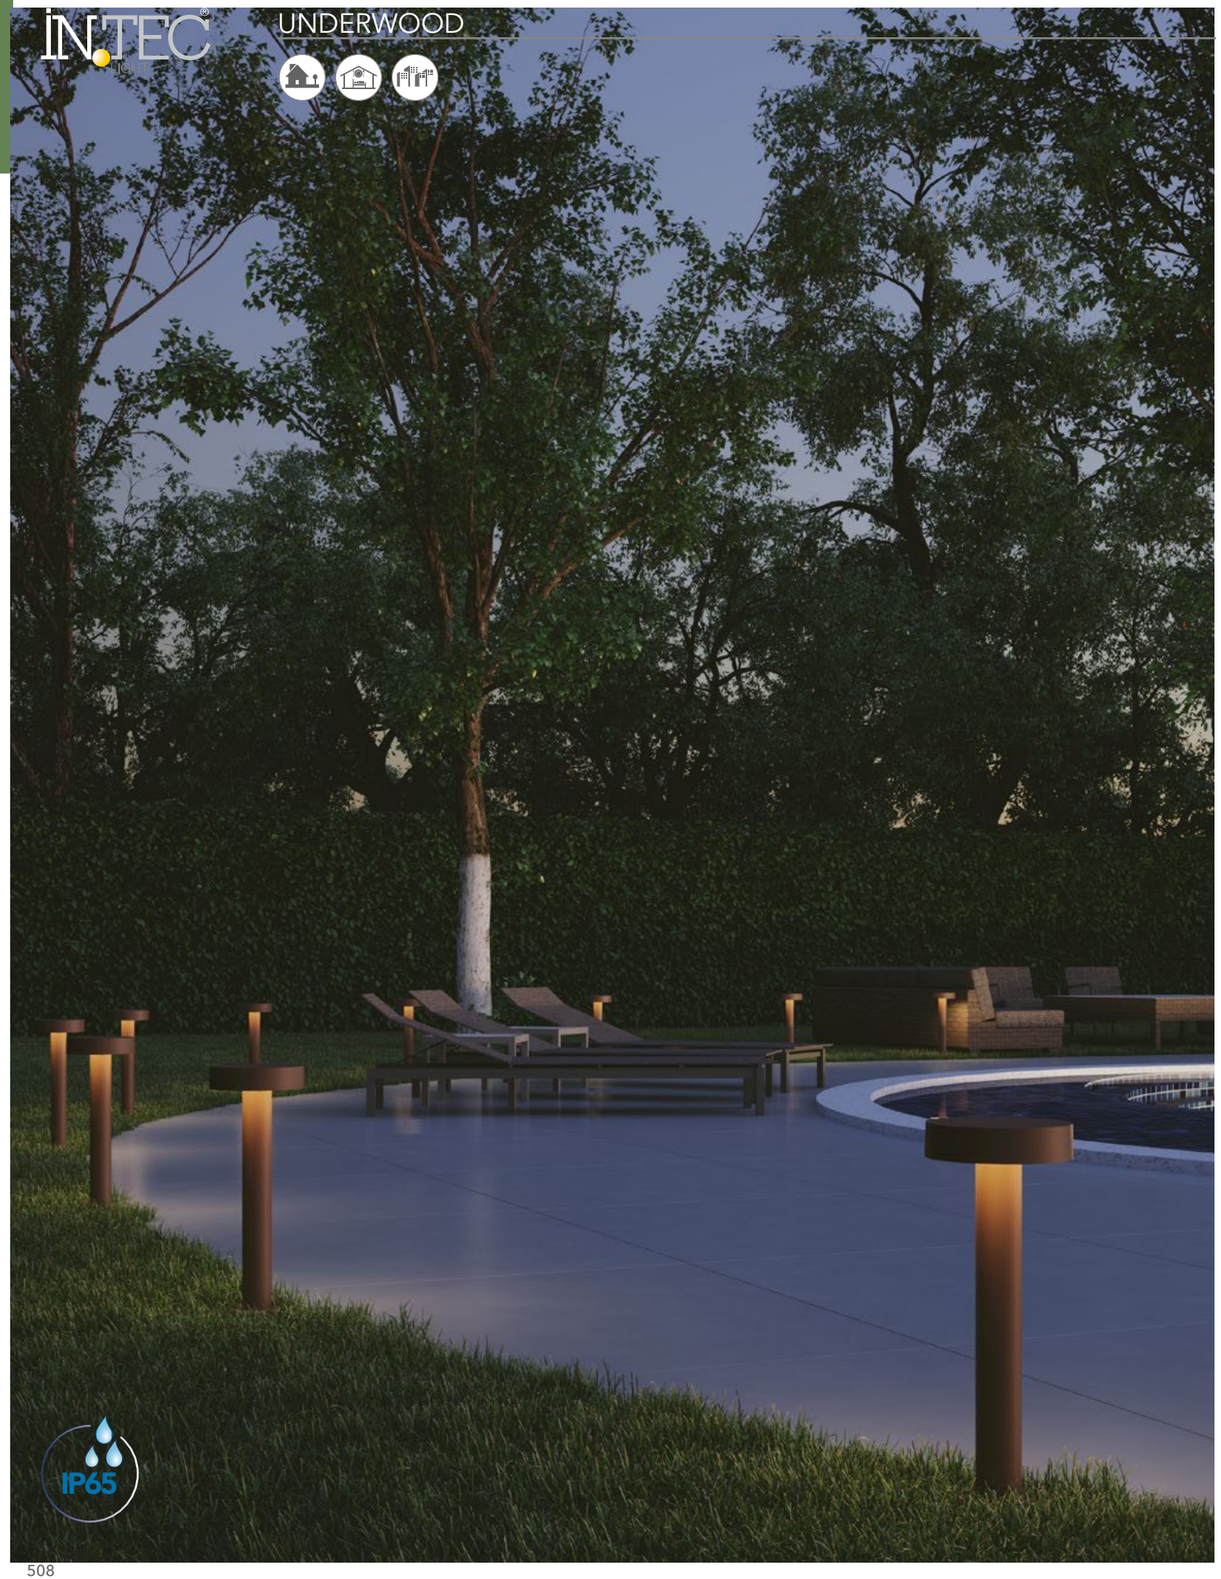

UNDERWOOD

Collezione in metallo finitura antracite o corten

Metal collection anthracite or corten finish.



G9

Attacco sorgente
Lampholder

I-UNDERWOOD-P70-ANT 8031414883059		4XG9 LED
I-UNDERWOOD-P70-BRO 8031414883066		4XG9 LED

Misure - size
dimensioni in mm - size mm



TOKYO

Collezione in acciaio inox con diffusore in policarbonato. Finiture bianco, bronzo e nikel spazzolato.

Stainless steel collection with diffuser in PC. White, bronze or brush nikel finish.



IP44



E27

Attacco sorgente
Light source



Lampadina consigliata
Suggested light bulb

I-ST021 8031421451081		1XE27 MAX 40W	IK07
I-TOKYO-AP BRO 8031414864423		1XE27 MAX 40W	IK07
I-TOKYO-AP BCO 8031414864447		1XE27 MAX 40W	IK07

Lampadina non inclusa
Light bulb not included

Misure - size
dimensioni in mm - size mm





E27

Attacco sorgente
Light source



Lampadina consigliata
Suggested light bulb

I-ST022-700 8031414877225		1XE27 MAX 40W	IK07
I-TOKYO-P70 BRO 8031414871780		1XE27 MAX 40W	IK07
I-TOKYO-P70 BCO 8031414875320		1XE27 MAX 40W	IK07

Lampadina non inclusa
Light bulb not included

Misure - size
dimensioni in mm - size mm





E27

Attacco sorgente
Light source



Lampadina consigliata
Suggested light bulb

I-ST022-1100 8031421661084		1XE27 MAX 40W	IK07
I-TOKYO-P BRO 8031414864393		1XE27 MAX 40W	IK07
I-TOKYO-P BCO 8031414864416		1XE27 MAX 40W	IK07

Lampadina non inclusa
Light bulb not included

Misure - size
dimensioni in mm - size mm

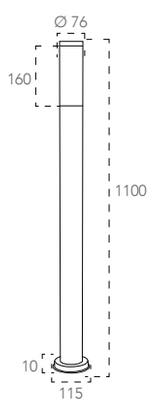

DROP



DROP

Collezione in alluminio finitura antracite con diffusore in policarbonato

Aluminum collection anthracite finish with PC diffuser



misura massima lampadina
Bulb max size



G9

Attacco sorgente
Lampholder

I-DROP-P33-ANT
8031414883073
1XG9 LED

Misure - size
dimensioni in mm - size mm





G9

Attacco sorgente
Lampholder

I-DROP-P53-ANT
8031414883080
1XG9 LED

Misure - size
dimensioni in mm - size mm





G9

Attacco sorgente
Lampholder

I-DROP-P73-ANT
8031414882793
1XG9 LED

Misure - size
dimensioni in mm - size mm





ETNA

Collezione in cemento grigio
Gray concrete collection



I-ETNA-AP4	4XGU10 MAX 10W	IK04
8031414866762		

Lampadina non inclusa
Light bulb not included

Connettore IP65 incluso
IP65 connector included

GU10
Attacco sorgente
Light source

Luce biemissione
Biemission light

Misure - size
dimensioni in mm - size mm





I-ETNA-P2	2XGU10 MAX 35W	IK05
8031414867905		

Lampadina non inclusa
Light bulb not included

Connettore IP65 incluso
IP65 connector included

GU10
Attacco sorgente
Light source

Misure - size
dimensioni in mm - size mm





MASAI

Palo in cemento bianco

Concrete post lamp white concrete colour

IP65

CEMENTO
CONCRETE



I-MASAI-P1		
8031414868100	1XR7S MAX 7W	IK05

Lampadina non inclusa
Light bulb not included

Connettore IP65 incluso
IP65 connector included

R7S
78 mm
Attacco sorgente
Light Source

Misure - size
dimensioni in mm - size mm



PERRET

Collezione in cemento grigio con diffusore in acrilico

Concrete collection gray finish with acrylic diffuser

IP65

CEMENTO
CONCRETE



I-PERRET-AP		
8031414871827	1XE14 MAX 10W	IK04

Lampadina non inclusa
Light bulb not included

Connettore IP65 incluso
IP65 connector included

E14
Attacco sorgente
Light Source

Misure - size
dimensioni in mm - size mm





I-PERRET-P60		
8031414871834	1XE27 MAX 15W	IK05

Lampadina non inclusa
Light bulb not included

Connettore IP65 incluso
IP65 connector included

E27
Attacco sorgente
Light Source

Misure - size
dimensioni in mm - size mm



DRINK



DRINK

TOUCH DIMMER

IP54

Materiale
Metallo

Colore
Bianco, nero, corten e oro goffrato

Sorgente luminosa
LED SMD 2,2W

Batteria
inclusa DC3,7V 2x2200 mAh

Temperatura colore
3000K

Flusso luminoso
180 Lm 9H

Material
Metal

Colour
Embossed white, black, corten or gold

Light source
LED SMD 2,2W

Battery
included DC3,7V 2x2200 mAh

Color temperature
3000K

Luminous flux
180 Lm 9H





LED-DRINK-NER 8031414885312	■	**180 LM 9H**
LED-DRINK-BCO 8031414885299	■	**180 LM 9H**
LED-DRINK-ORO 8031414885329	■	**180 LM 9H**
LED-DRINK-BRO 8031414885305	■	**180 LM 9H**





Misure - size
dimensioni in mm - size mm



Accessori inclusi
Accessories included

Base per ricarica
con USB e adattatore
Charging base
with USB and adaptor



JAMMIN

TOUCH DIMMER

IP44

Materiale
Metallo e PE

Colore
Bianco o nero goffrato

Sorgente luminosa
LED SMD 1,5W

Batteria
inclusa DC3,7V 4000 mAh

Temperatura colore
3000K

Flusso luminoso
60 Lm 12H

Material
Metal and PE

Colour
Embossed white or black

Light source
LED SMD 1,5W

Battery
included DC3,7V 4000 mAh

Color temperature
3000K

Luminous flux
60 Lm 12H







Doppia uscita - double output
USB **A** 5V 2A
USB **C** 5V 2A

LED-JAMMIN-L-NER 8031414884384		**60 LM 9H**
LED-JAMMIN-L-BCO 8031414884377		**60 LM 9H**

TOUCH DIMMER





Misure - size
dimensioni in mm - size mm



Accessori inclusi
Accessories included

Cavo per ricarica
USB **A** 5V 2A
USB **C** 5V 2A

Charging cable
USB **A** 5V 2A
USB **C** 5V 2A





COCKTAIL



COCKTAIL

TOUCH DIMMER

IP54

Materiale
Metallo

Colore
Bianco, nero, corten e oro goffrato

Sorgente luminosa
LED SMD 2,2W

Batteria
inclusa DC3,7V 2x2200 mAh

Temperatura colore
3000K

Flusso luminoso
192 Lm 9H

Material
Metal

Colour
Embossed white, black, corten or gold

Light source
LED SMD 2,2W

Battery
included DC3,7V 2x2200 mAh

Color temperature
3000K

Luminous flux
192 Lm 9H





LED-COCKTAIL-NER 8031414882502		**192 LM 9H**
LED-COCKTAIL-BCO 8031414882496		**192 LM 9H**
LED-COCKTAIL-ORO 8031414885282		**192 LM 9H**
LED-COCKTAIL-BRO 8031414882519		**192 LM 9H**

TOUCH DIMMER





Misure - size
dimensioni in mm - size mm



Accessori inclusi
Accessories included

Cavo per ricarica
con adattatore DC5V 1A
1,2 metri
Charging cable
with adaptor DC5V 1A
1,2 meters





CLIMAX

TOUCH DIMMER

IP54

Materiale
Metallo - acrilico

Colore
Nero matto

Sorgente luminosa
LED SMD 1,1W

Batteria
inclusa DC3,7V 2000 mAh

Temperatura colore
3000K

Flusso luminoso
100 Lm

Material
Metal - acrylic

Colour
Matt black

Light source
LED SMD 1,1W

Battery
included DC3,7V 2000 mAh

Color temperature
3000K

Luminous flux
100 Lm



LED-CLIMAX-L1
8031414883141
100 LM

Misure - size
dimensioni in mm - size mm



Accessori inclusi
Accessories included

Cavo per ricarica
USB
USB charging cable





LED-CLIMAX-LG1
8031414883158
100 LM

Misure - size
dimensioni in mm - size mm



Accessori inclusi
Accessories included

Cavo per ricarica
USB
USB charging cable



TOUCH DIMMER







OBERON

TOUCH DIMMER

IP54

Materiale
Metallo

Colore
Bianco

Sorgente luminosa
LED SMD 2,2W

Batteria
inclusa DC3,7V 2x2200 mAh

Temperatura colore
3000K

Flusso luminoso
168 Lm 9H

Material
Metal

Colour
White

Light source
LED SMD 2,2W

Battery
included DC3,7V 2x2200 mAh

Color temperature
3000K

Luminous flux
168 Lm 9H



LANT-OBERON
8031440362603
168 LM 9H

TOUCH DIMMER





Misure - size
dimensioni in mm - size mm



Accessori inclusi
Accessories included

Cavo per ricarica
con adattatore DC5V 1A
1,2 metri
Charging cable
with adaptor DC5V 1A
1,2 meters





LANT-OBERON-KIT-AP
8031414882533
Kit staffa applique per lume
wall lamp bracket kit



LANT-OBERON-KIT-S
8031414882540
Kit sospensione per lume cavo 2 metri
suspension kit 2 meters cable



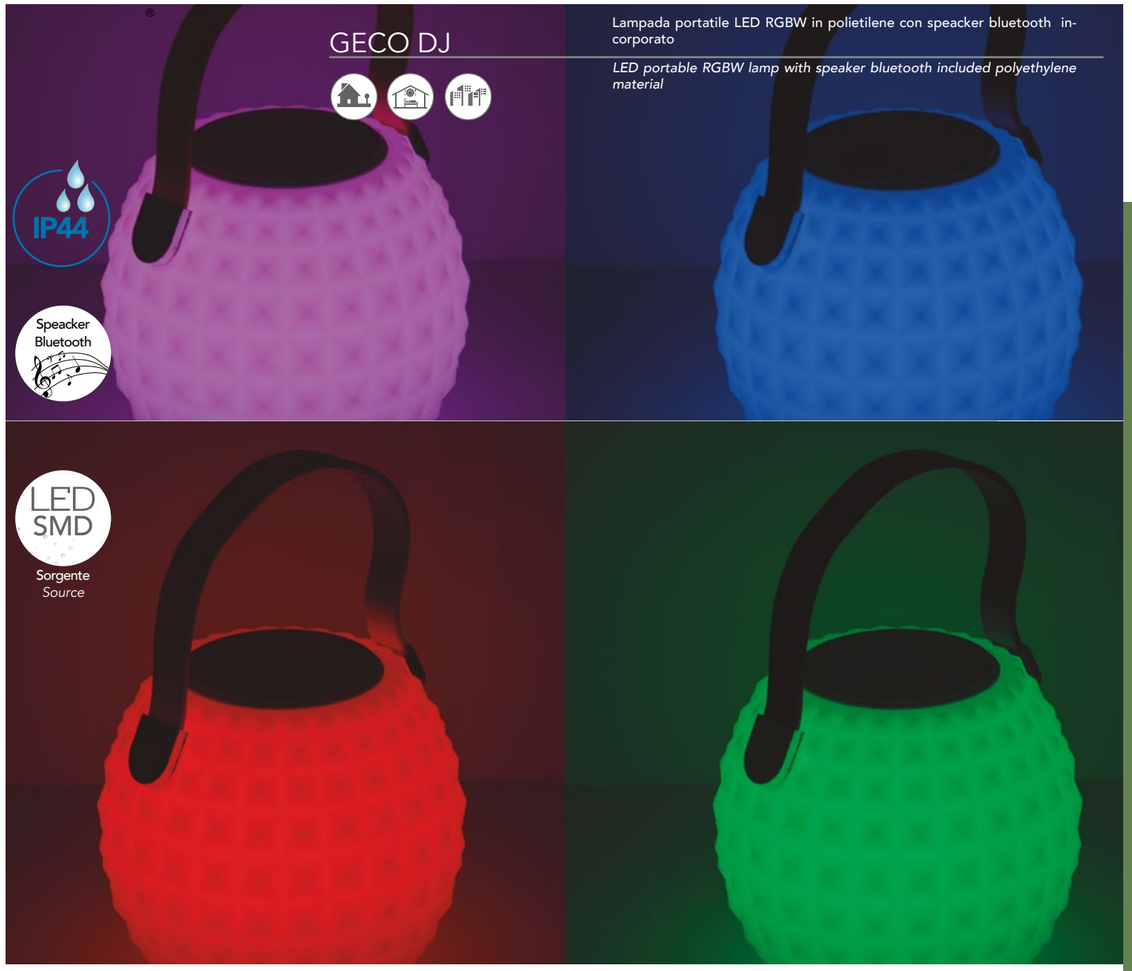

GECO DJ

Lampada portatile LED RGBW in polietilene con speacker bluetooth incorporato

LED portable RGBW lamp with speaker bluetooth included polyethylene material



I-GECO-DJ-L25 — **3W - 180 Lm**
8031414862542

Temperatura colore
Colour temperature
RGB 4000K

Misure - size
dimensioni in mm - size mm



Accessori inclusi
Accessories included

Speacker 10W Bluetooth 4.0
Distanza connessione max 15 metri
10w speacker bluetooth 4.0
Connection distance max 15 meters

Telecomando infrarossi
IR remote control



230V 50Hz - **IP20**



5V DC 1A



GECO LED

Lampada LED RGBW in polietilene

PE LED RGBW lamp

Materiale
PE
Driver
incluso
Sorgente luminosa
LED SMD 4W
Temperatura colore
RGB + 4000K
Flusso luminoso
240 Lm

Material
PE
Driver
included
Light source
LED SMD 4W
Color temperature
RGB + 4000K
Luminous flux
240 Lm



I-GECO-SFERA-L30 8031414862436	**4W**
I-GECO-SFERA-L40 8031414862443	**4W**
I-GECO-SFERA-L50 8031414862450	**4W**

Modello *items*	SFERA-L30	SFERA-L40	SFERA-L50
Misure - size dimensioni in mm - size mm	Ø 300	Ø 400	Ø 500

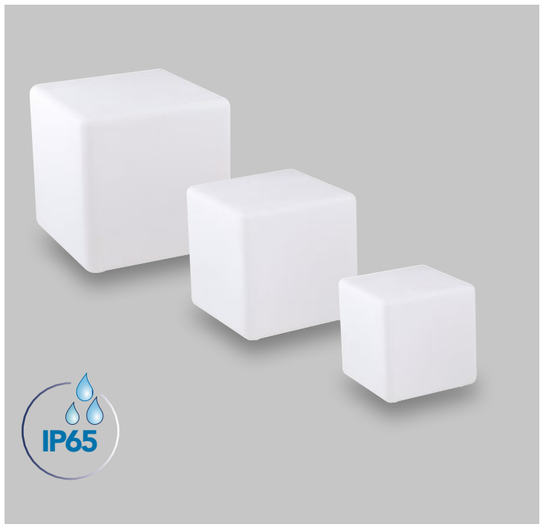

I-GECO-CUBO-L30 8031414862467	**4W**
I-GECO-CUBO-L40 8031414862474	**4W**
I-GECO-CUBO-L50 8031414862481	**4W**

Modello *items*	CUBO-L30	CUBO-L40	CUBO-L50
Misure - size dimensioni in mm - size mm	300x300x300	400x400x400	500x500x500

Accessori inclusi
Accessories included


5V DC 1A


Telecomando infrarossi
IR remote control



GECO LED

Vaso LED RGBW in polietilene

PE LED RGBW vase

Materiale
PE
Driver
incluso
Sorgente luminosa
LED SMD 4W
Temperatura colore
RGB + 4000K
Flusso luminoso
240 Lm

Material
PE
Driver
included
Light source
LED SMD 4W
Color temperature
RGB + 4000K
Luminous flux
240 Lm



I-GECO-VASO-Q-L 8031414862535	**4W**	**240 LM**
I-GECO-VASO-Q-XL 8031414864713	**4W**	**240 LM**

Modello *items*	Q-XL	Q-L
Misure - size dimensioni in mm - size mm	900 380x380	600 280x280



I-GECO-VASO-R-L 8031414862528	**4W**	**240 LM**
I-GECO-VASO-R-XL 8031414864720	**4W**	**240 LM**

Modello *items*	R-XL	R-L
Misure - size dimensioni in mm - size mm	900 Ø 380	600 Ø 280

Accessori inclusi
Accessories included


5V DC 1A


Telecomando infrarossi
IR remote control



GECO E27

Lampada in polietilene con attacco E27

PE lamp with E27 lampholder



Lampadine LED INTEC consigliate per illuminazione multicolor o bianco dinamico presenti nel catalogo BULBS COLLECTION
Suggested INTEC LED bulbs for multicolor or dynamic white lighting included in the catalogue BULBS COLLECTION



Lampada LED SMART classe **A+**

Codice	EAN	Watt
SMART-E27-RGBCCT	8031414872657	10W

R G B CCT

VOICE CONTROL SYSTEM





Lampada LED RGBW classe **A+**

Codice	EAN	Watt
I-LUMYA-E27-RGB	8031440354431	10W

R G B 4000K

IR CONTROL SYSTEM



I-GECO-SFERA-S30 **1XE27 MAX 42W**
8031414864461

E27
Attacco sorgente
Light Source

Lampadina non inclusa
Light bulb not included

Misure - size
dimensioni in mm - size mm





I-GECO-SFERA-S40 **1XE27 MAX 42W**
8031414864454

E27
Attacco sorgente
Light Source

Lampadina non inclusa
Light bulb not included

Misure - size
dimensioni in mm - size mm



GECO E27



I-GECO-SFERA-E-L30 8031414868476	**1XE27 MAX 42W**
I-GECO-SFERA-E-L40 8031414868483	**1XE27 MAX 42W**
I-GECO-SFERA-E-L50 8031414868490	**1XE27 MAX 42W**

E27
Attacco sorgente
Light Source

Lampadina non inclusa
Light bulb not included

Modello *items*	E-L30	E-L40	E-L50

Misure - size
dimensioni in mm - size mm

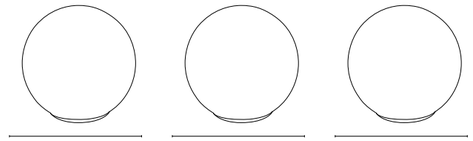

Accessori inclusi
Accessories included

Cavo 2,5 metri
con spina shuko
2,5 meters of cable
with schuko plug

IP44

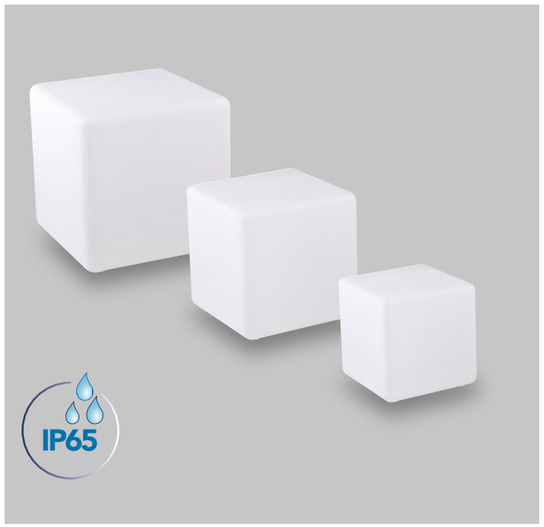

I-GECO-CUBO-E-L30 8031414867943	**1XE27 MAX 42W**
I-GECO-CUBO-E-L40 8031414868117	**1XE27 MAX 42W**
I-GECO-CUBO-E-L50 8031414868124	**1XE27 MAX 42W**

E27
Attacco sorgente
Light Source

Lampadina non inclusa
Light bulb not included

Modello *items*	E-L30	E-L40	E-L50

Misure - size
dimensioni in mm - size mm

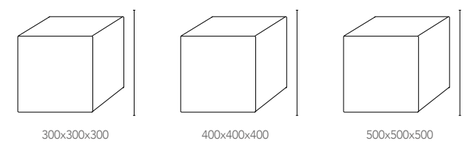

Accessori inclusi
Accessories included

Cavo 2,5 metri
con spina shuko
2,5 meters of cable
with schuko plug

IP44



I-GECO-SPK 8031414878437	Picchetto alluminio per lampade GECO E27 *Aluminum spike for E27 GECO family*

Misure - size
dimensioni in mm - size mm



GECO E27



I-GECO-VASO-E-Q-L 8031414868506	**1XE27 MAX 42W**
I-GECO-VASO-E-Q-XL 8031414868131	**1XE27 MAX 42W**

E27
Attacco sorgente
Light Source

Lampadina non inclusa
Light bulb not included

Modello *items*	E-Q-XL	E-Q-L

Misure - size
dimensioni in mm - size mm

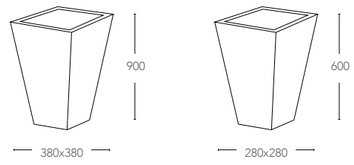

Accessori inclusi
Accessories included

Cavo 2,5 metri
con spina shuko
2,5 meters of cable
with schuko plug

IP44



I-GECO-VASO-E-R-L 8031414868513	**1XE27 MAX 42W**
I-GECO-VASO-E-R-XL 8031414868520	**1XE27 MAX 42W**

E27
Attacco sorgente
Light Source

Lampadina non inclusa
Light bulb not included

Modello *items*	E-R-XL	E-R-L

Misure - size
dimensioni in mm - size mm

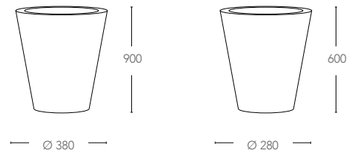

Accessori inclusi
Accessories included

Cavo 2,5 metri
con spina shuko
2,5 meters of cable
with schuko plug

IP44

APPLIQUE SOSPENSIONI E PALETTI CORRELATI / *WALL SOSPENSION AND FLOOR LAMP COMBINED*

GECO E27

Piantana in polietilene con struttura in metallo antracite o bianco opaco

PE floor lamp with metal structure anthracyte or white colour





I-GECO-BAR-PT
8031414868599
1XE27 MAX 42W

Lampadina non inclusa
Light bulb not included

Misure - size
dimensioni in mm - size mm





Attacco sorgente
Light Source

Accessori inclusi
Accessories included



Cavo 2,5 metri
con spina shuko
2,5 meters of cable
with schuko plug





I-GECO-SFERA-PT30
8031414864430
1XE27 MAX 42W

Lampadina non inclusa
Light bulb not included

Misure - size
dimensioni in mm - size mm





Attacco sorgente
Light Source

Accessori inclusi
Accessories included



Cavo 2,5 metri
con spina shuko
2,5 meters of cable
with schuko plug





GECO LED SOLAR

Lampada portatile LED RGBW in polietilene con autoricarica solare

PE LED portable RGBW lamp with solar self charge

IP65

LED SMD

Sorgente luminosa
Light source

SOLAR

Lampada gallegiante
Floating Lamp





Temperatura colore - *colour temperature*

R G B + 4000k

I-GECO-CUBO-SOL30 — 1,5W - 90 Lm

8031414870837

Misure - size
dimensioni in mm - size mm



I-GECO-CUBO-SOL40 — 1,5W - 90 Lm

8031414870844

Misure - size
dimensioni in mm - size mm



Accessori inclusi
Accessories included

Telecomando infrarossi
IR remote control



5V DC 1A - **IP20**
Solar panel



Carica alimentatore - DC charge



Carica solare - auto solar charge



GECO LED SOLAR

Lampada portatile LED RGBW in polietilene con autoricarica solare

PE LED portable RGBW lamp with solar self charge

IP65

LED SMD

Sorgente luminosa
Light source

SOLAR

Lampada gallegiante
Floating Lamp

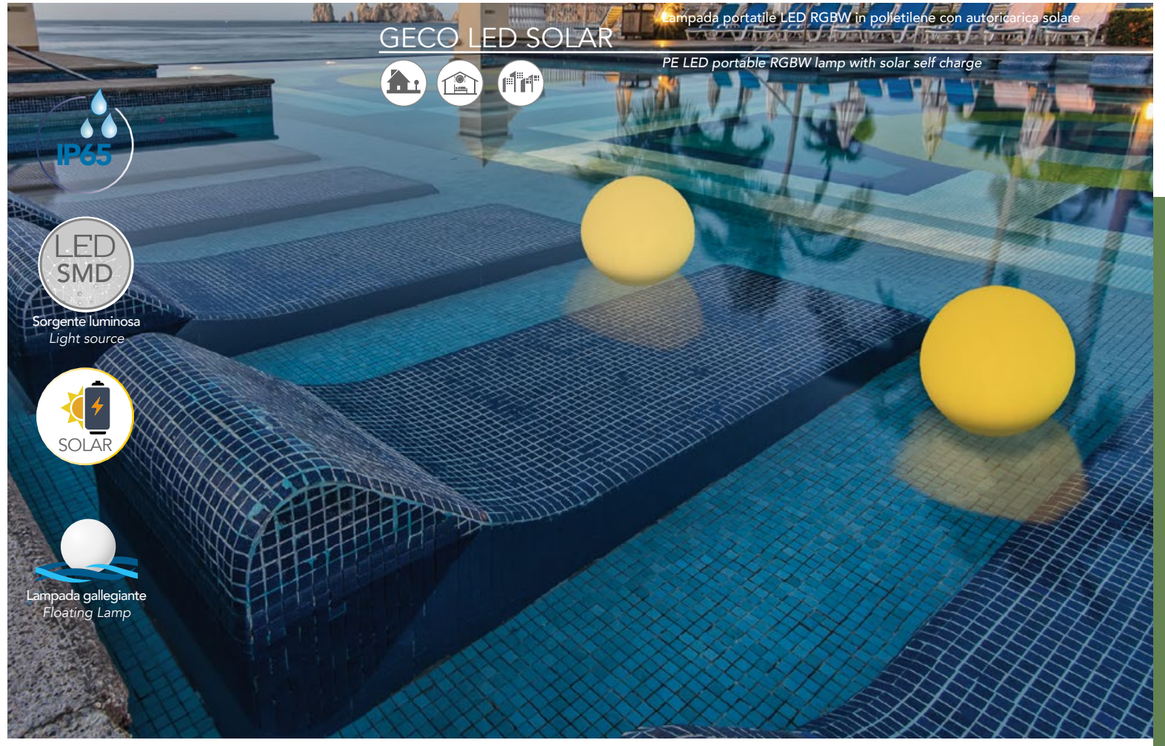



Temperatura colore - *colour temperature*

R G B + 4000k

I-GECO-SFERA-SOL30 — 1,5W - 90 Lm

8031414870868

Misure - size
dimensioni in mm - size mm



I-GECO-SFERA-SOL40 — 1,5W - 90 Lm

8031414870875

Misure - size
dimensioni in mm - size mm



Accessori inclusi
Accessories included

Telecomando infrarossi
IR remote control



5V DC 1A - **IP20**
Solar panel



Carica alimentatore - DC charge



Carica solare - auto solar charge



MANDALA

Collezione in metallo antracite con diffusore in vetro trasparente

Metal collection anthracite finish with trasparent glass diffuser





LANT-MANDALA/AP
8031414862641

1XE27 MAX 60W

Lampadina non inclusa
Light bulb not included

Misure - *size*
dimensioni in mm - size mm





E27

Attacco sorgente
Source

Lampadina consigliata
Suggested light bulb



LANT-MANDALA/S1
8031414870684

1XE27 MAX 60W

Lampadina non inclusa
Light bulb not included

Misure - *size*
dimensioni in mm - size mm





E27

Attacco sorgente
Source

Lampadina consigliata
Suggested light bulb



YORK

Collezione in alluminio nero con diffusore in policarbonato

Black aluminium collection with PC diffuser



LANT-YORK/AP 8031414862757 — **1XE27 MAX 60W**

Lampadina non inclusa
Light bulb not included

Misure - size
dimensioni in mm - size mm



E27
Attacco sorgente
Source



Lampadina consigliata
Suggested light bulb



LANT-YORK/S1 8031414862764 — **1XE27 MAX 60W**

Lampadina non inclusa
Light bulb not included

Misure - size
dimensioni in mm - size mm



E27
Attacco sorgente
Source



Lampadina consigliata
Suggested light bulb

APPLIQUE SOSPENSIONI E PALETTI CORRELATI / *WALL SOSPENSION AND FLOOR LAMP COMBINED*

SKITTLE

Lanterna in alluminio pressofuso colore antracite diffusore in PE

Die cast aluminium lantern anthracite finish with clear PE diffuser





E27
Attacco sorgente
Light Source

I-SKITTLE-AP
8031414881819
1XE27 MAX 28W

Lampadina non inclusa
Light bulb not included

Misure - size
dimensioni in mm - size mm





E27
Attacco sorgente
Light Source

I-SKITTLE-PL
8031414881826
1XE27 MAX 28W

Lampadina non inclusa
Light bulb not included

Misure - size
dimensioni in mm - size mm





E27
Attacco sorgente
Light Source

I-SKITTLE-P65
8031414881833
1XE27 MAX 28W

Lampadina non inclusa
Light bulb not included

Misure - size
dimensioni in mm - size mm





E27
Attacco sorgente
Light Source

I-SKITTLE-P100
8031414882434
1XE27 MAX 28W

Lampadina non inclusa
Light bulb not included

Misure - size
dimensioni in mm - size mm



ORBIT

Lanterna in acrilico PMMA e base in alluminio pressofuso nero

Acrylic PMMA lantern with base in die cast aluminium black finish

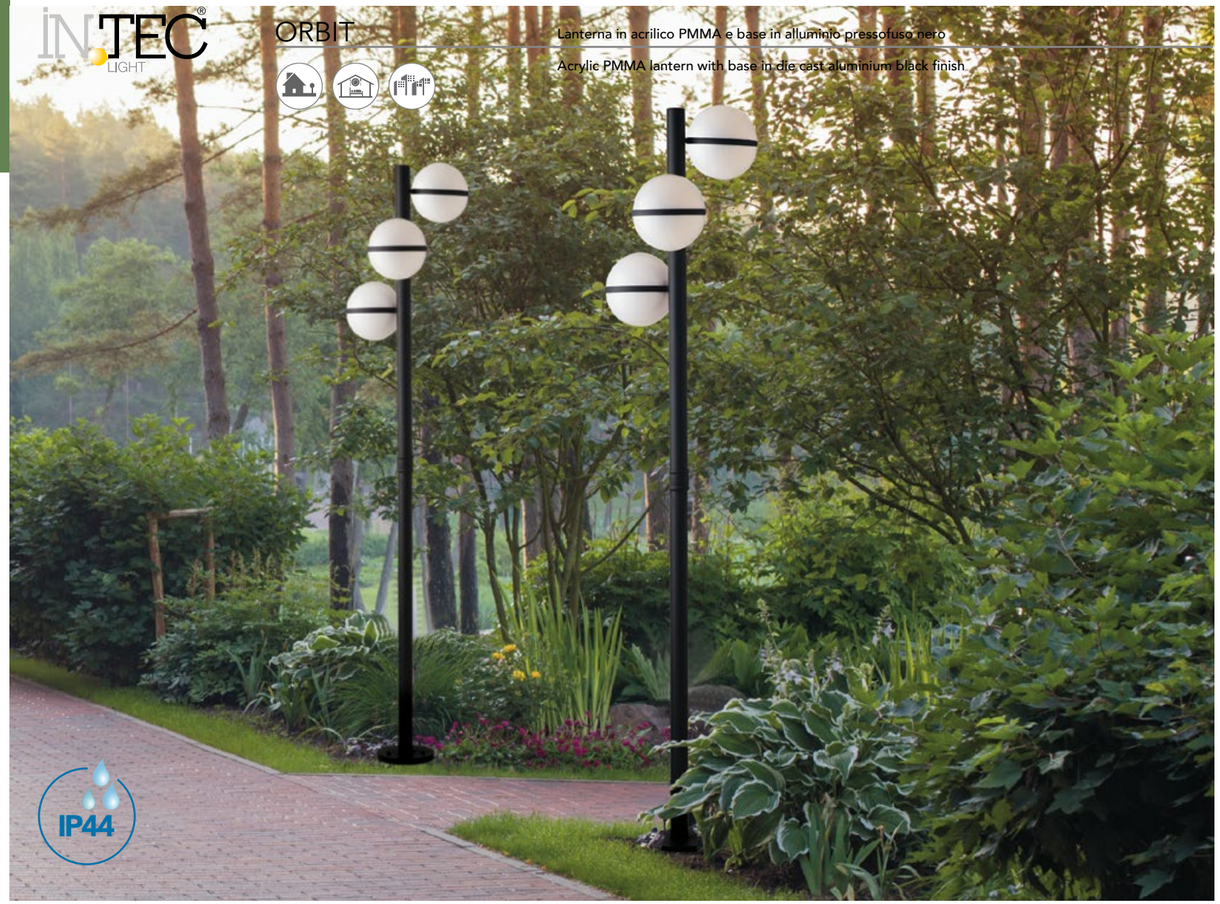



LANT-ORBIT/AP
8031414862658 — **1XE27 MAX 60W**

Lampadina non inclusa
Light bulb not included

Misure - size
dimensioni in mm - size mm



E27
Attacco sorgente
Light Source



LANT-ORBIT/S1
8031414862665 — **1XE27 MAX 60W**

Lampadina non inclusa
Light bulb not included

Misure - size
dimensioni in mm - size mm



E27
Attacco sorgente
Light Source



LANT-ORBIT/L1
8031414866335 — **1XE27 MAX 60W**

Lampadina non inclusa
Light bulb not included

Misure - size
dimensioni in mm - size mm



E27
Attacco sorgente
Light Source



LANT-ORBIT/P1
8031414862689 — **1XE27 MAX 60W**

Lampadina non inclusa
Light bulb not included

Misure - size
dimensioni in mm - size mm



E27
Attacco sorgente
Light Source



LANT-ORBIT/P3
8031414862702 — **3XE27 MAX 60W**

Lampadina non inclusa
Light bulb not included

Misure - size
dimensioni in mm - size mm



E27
Attacco sorgente
Light Source

MIRAGE

Lanterna in metallo colore antracite diffusore in vetro trasparente

Metal lantern anthracite finish with clear glass diffuser

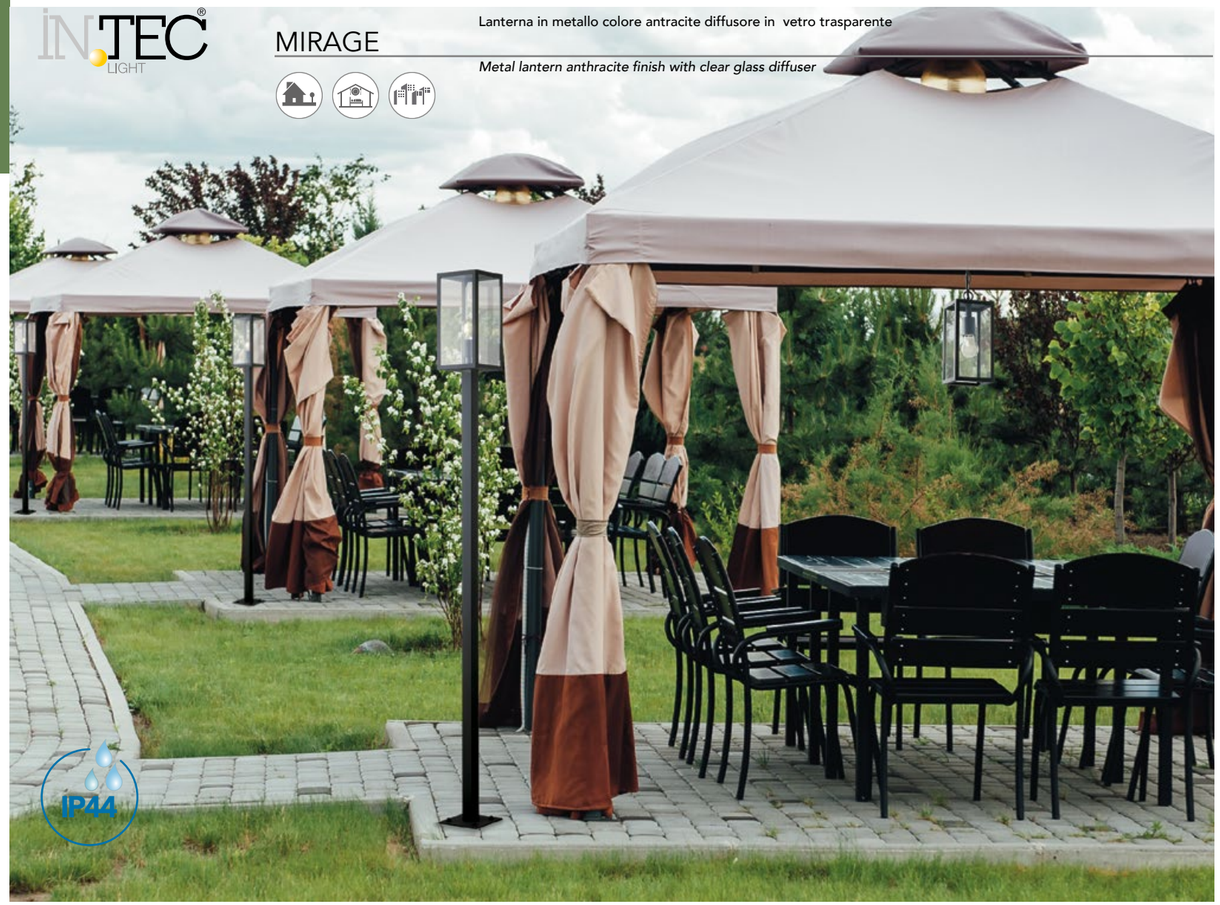



E27
Attacco sorgente
Light Source

LANT-MIRAGE-AP
8031414867059
1XE27 MAX 60W

Lampadina non inclusa
Light bulb not included

Misure - size
dimensioni in mm - size mm





E27
Attacco sorgente
Light Source

LANT-MIRAGE-S1
8031414867066
1XE27 MAX 60W

Lampadina non inclusa
Light bulb not included

Misure - size
dimensioni in mm - size mm





E27
Attacco sorgente
Light Source

LANT-MIRAGE-L1
8031414869190
1XE27 MAX 60W

Lampadina non inclusa
Light bulb not included

Misure - size
dimensioni in mm - size mm



Accessori inclusi
Accessories included

Cavo 2,5 metri
con spina shuko
2,5 meters of cable
with schuko plug

IP44



E27
Attacco sorgente
Light Source

LANT-MIRAGE-P90
8031414869206
1XE27 MAX 60W

Lampadina non inclusa
Light bulb not included

Misure - size
dimensioni in mm - size mm





E27
Attacco sorgente
Light Source

LANT-MIRAGE-P200
8031414869213
1XE27 MAX 60W

Lampadina non inclusa
Light bulb not included

Misure - size
dimensioni in mm - size mm



PRISMA

Lanterna in alluminio pressofuso colore antracite diffusore in vetro trasparente

Die cast aluminium lantern anthracite finish with clear glass diffuser





Lampadina consigliata
Suggested light bulb

E27
Attacco sorgente
Light Source

LANT-PRISMA/AP1A
8031414867103
1XE27 MAX 60W

Lampadina non inclusa
Light bulb not included

Misure - size
dimensioni in mm - size mm





Lampadina consigliata
Suggested light bulb

E27
Attacco sorgente
Light Source

LANT-PRISMA/AP1B
8031414867073
1XE27 MAX 60W

Lampadina non inclusa
Light bulb not included

Misure - size
dimensioni in mm - size mm





Lampadina consigliata
Suggested light bulb

E27
Attacco sorgente
Light Source

LANT-PRISMA/S1
8031414867080
1XE27 MAX 60W

Lampadina non inclusa
Light bulb not included

Misure - size
dimensioni in mm - size mm





Lampadina consigliata
Suggested light bulb

E27
Attacco sorgente
Light Source

LANT-PRISMA/P1
8031414869183
1XE27 MAX 60W

Lampadina non inclusa
Light bulb not included

Misure - size
dimensioni in mm - size mm



LADY

Lanterna LED integrato in alluminio pressofuso colore nero goffrato diffusore in policarbonato
Die cast aluminium built-in LED lantern black embossed finish with PC diffuser

Materiale
Alluminio pressofuso + policarbonato
Driver
Integrato
Temperatura colore
4000K
Durata e on/off
25.000 h - >15.000 on/off
Grado IK
IK06
CRI
>80

Material
Die cast aluminium + polycarbonate
Driver
Built-in
Color temperature
4000K
Lifetime and on/off
25.000 h - >15.000 on/off
IK degree
IK06
CRI
>80



LANT-LADY/AP1A
8031440361316 — **12W 800 LM**

Misure - size
dimensioni in mm - size mm





LANT-LADY/AP1B
8031440352130 — **12W 800 LM**

Misure - size
dimensioni in mm - size mm





LANT-LADY/AP1A-S
8031440361323 — **12W 800 LM**

Accessori integrati
Built in Accessories

sensore di movimento regolabile
adjustable motion sensor



Misure - size
dimensioni in mm - size mm





LANT-LADY/S1
8031440352147 — **12W 800 LM**

Misure - size
dimensioni in mm - size mm





LANT-LADY/L1
8031440361330 — **12W 800 LM**

Misure - size
dimensioni in mm - size mm





LANT-LADY/P1
8031440361347 — **12W 800 LM**

Misure - size
dimensioni in mm - size mm





LANT-LADY/P3
8031440352116 — **3XGX53** *3X680 LM*

Misure - size
dimensioni in mm - size mm



GX53

Lampadina LED inclusa
LED light bulb included

Watt	Cri	Lm	K	Durata
9W	80	680	4000	25000h

CLOE

Lanterna LED integrato in alluminio pressofuso colore nero goffrato diffusore in policarbonato
Die cast aluminium built-in LED lantern black embossed finish with PC diffuser

Materiale
Alluminio pressofuso + policarbonato
Driver
Integrato
Temperatura colore
4000K
Durata e on/off
15.000h - >10.000 on/off
Grado IK
IK06
CRI
>80

Material
Die cast aluminium + polycarbonate
Driver
Built-in
Color temperature
4000K
Lifetime and on/off
15.000h - >10.000 on/off
IK degree
IK06
CRI
>80



LANT-CLOE/AP1A
8031440361385
12W 800 LM

Misure - size
dimensioni in mm - size mm





LANT-CLOE/AP1B
8031440361392
12W 800 LM

Misure - size
dimensioni in mm - size mm





LANT-CLOE/AP1A-S
8031440361408
12W 800 LM

Misure - size
dimensioni in mm - size mm



Accessori integrati
Built in Accessories

sensore di movimento regolabile
adjustable motion sensor





LANT-CLOE/S1
8031440361422
12W 800 LM

Misure - size
dimensioni in mm - size mm





LANT-CLOE/L1
8031440361415
12W 800 LM

Misure - size
dimensioni in mm - size mm





LANT-CLOE/P1
8031440361439
12W 800 LM

Misure - size
dimensioni in mm - size mm





LANT-CLOE/P3
8031440361446
3X12W 2400 LM

Misure - size
dimensioni in mm - size mm



MEGAN

Lanterna LED integrato in alluminio pressofuso colore nero goffrato diffusore in policarbonato
Die cast aluminium built-in LED lantern black embossed finish with PC diffuser

Materiale
Alluminio pressofuso + policarbonato
Driver
Integrato
Temperatura colore
4000K
Durata e on/off
15.000h - >10.000 on/off
Grado IK
IK06
CRI
>80

Material
Die cast aluminium + polycarbonate
Driver
Built-in
Color temperature
4000K
Lifetime and on/off
15.000h - >10.000 on/off
IK degree
IK06
CRI
>80

IP44

LED SMD



LANT-MEGAN/AP1A
8031440361453
12W 800 LM

Misure - size
dimensioni in mm - size mm





LANT-MEGAN/AP1B
8031440361477
12W 800 LM

Misure - size
dimensioni in mm - size mm





LANT-MEGAN/AP1A-S
8031440361460
12W 800 LM

Misure - size
dimensioni in mm - size mm



Accessori integrati
Built in Accessories

sensore di movimento regolabile
adjustable motion sensor





LANT-MEGAN/S1
8031440361507
12W 800 LM

Misure - size
dimensioni in mm - size mm





LANT-MEGAN/L1
8031440361484
12W 800 LM

Misure - size
dimensioni in mm - size mm





LANT-MEGAN/P1
8031440361491
12W 800 LM

Misure - size
dimensioni in mm - size mm





LANT-MEGAN/P3
8031440361606
3X12W 2400 LM

Misure - size
dimensioni in mm - size mm



ROMA

Lanterne in alluminio pressofuso con diffusore in vetro trasparente
Die-cast aluminium lantern with clear glass diffuser

IP44

E27
Attacco sorgente
Light Source



LANT-ROMA/AP1A BCO 8031434661217		1XE27 MAX 60W
LANT-ROMA/AP1A 8031430751172		1XE27 MAX 60W

Lampadina non inclusa
Light bulb not included

Misure - size
dimensioni in mm - size mm





LANT-ROMA/AP1B BCO 8031434671216		1XE27 MAX 60W
LANT-ROMA/AP1B 8031430761171		1XE27 MAX 60W

Lampadina non inclusa
Light bulb not included

Misure - size
dimensioni in mm - size mm





LANT-ROMA/AP1A-S 8031435921235		1XE27 MAX 60W

Lampadina non inclusa
Light bulb not included

Misure - size
dimensioni in mm - size mm



Accessori integrati
Built in Accessories

sensore di movimento regolabile
adjustable motion sensor





LANT-ROMA/S1 BCO 8031434681215		1XE27 MAX 60W
LANT-ROMA/S1 8031430791178		1XE27 MAX 60W

Lampadina non inclusa
Light bulb not included

Misure - size
dimensioni in mm - size mm





LANT-ROMA/L1 BCO 8031436951248		1XE27 MAX 60W
LANT-PALETTO 8031414042203		1XE27 MAX 60W

Lampadina non inclusa
Light bulb not included

Misure - size
dimensioni in mm - size mm





LANT-ROMA/P1 BCO 8031436941249		1XE27 MAX 60W
LANT-ROMA/P1 8031430771170		1XE27 MAX 60W

Lampadina non inclusa
Light bulb not included

Misure - size
dimensioni in mm - size mm





LANT-ROMA/P3 8031430781179		3XE27 MAX 60W

Lampadina non inclusa
Light bulb not included

Misure - size
dimensioni in mm - size mm



APPLIQUE SOSPENSIONI E PALETTI CORRELATI / *WALL SOSPENSION AND FLOOR LAMP COMBINED*





LANT-MILANO/AP1A BCO 8031436931240		1XE27 MAX 60W
LANT-MILANO/AP1A 8031436921241		1XE27 MAX 60W

Lampadina non inclusa
Light bulb not included

Misure - size
dimensioni in mm - size mm





LANT-MILANO/AP1B BCO 8031436911242		1XE27 MAX 60W
LANT-MILANO/AP1B 8031436901243		1XE27 MAX 60W

Lampadina non inclusa
Light bulb not included

Misure - size
dimensioni in mm - size mm





LANT-MILANO/S1 BCO 8031436851234		1XE27 MAX 60W
LANT-MILANO/S1 8031436841235		1XE27 MAX 60W

Lampadina non inclusa
Light bulb not included

Misure - size
dimensioni in mm - size mm





LANT-MILANO/L1 BCO 8031436891247		1XE27 MAX 60W
LANT-MILANO/L1 8031436881248		1XE27 MAX 60W

Lampadina non inclusa
Light bulb not included

Misure - size
dimensioni in mm - size mm





LANT-MILANO/P1 BCO 8031436871232		1XE27 MAX 60W
LANT-MILANO/P1 8031436971246		1XE27 MAX 60W

Lampadina non inclusa
Light bulb not included

Misure - size
dimensioni in mm - size mm



APPLIQUE SOSPENSIONI E PALETTI CORRELATI / WALL SOSPENSION AND FLOOR LAMP COMBINED





E27
Attacco sorgente
Light Source

LANT-ROMA-HEAD21
8031414878512
1XE27 MAX 60W

Lampadina non inclusa
Light bulb not included

Misure - size
dimensioni in mm - size mm



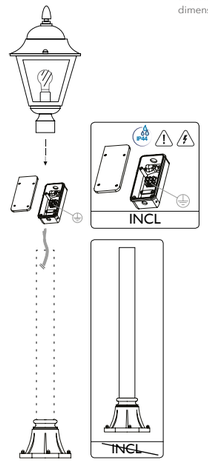



E27
Attacco sorgente
Light Source

LANT-MILANO-HEAD23
8031414878529
1XE27 MAX 60W

Lampadina non inclusa
Light bulb not included

Misure - size
dimensioni in mm - size mm



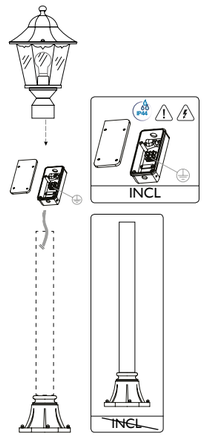

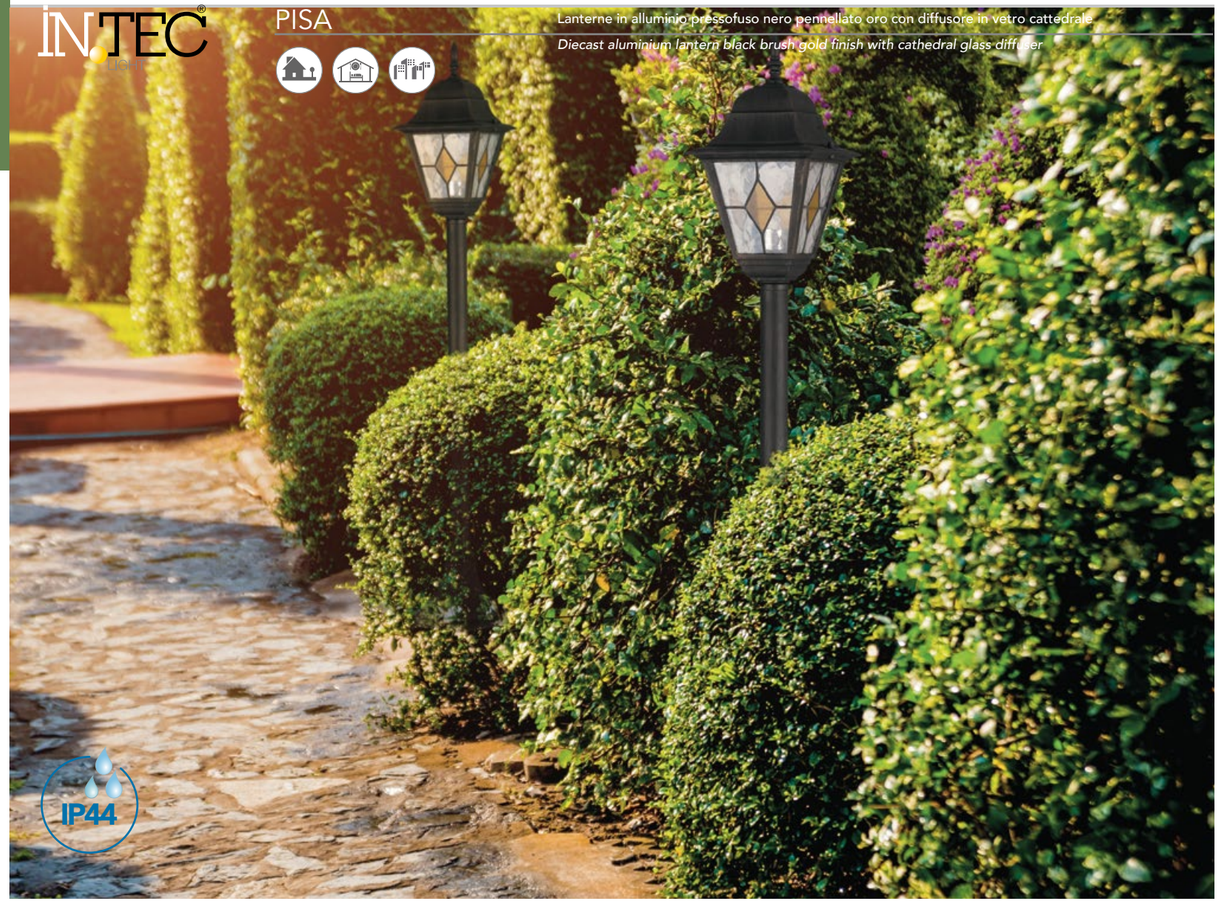

PISA

Lanterne in alluminio pressofuso nero pennellato oro con diffusore in vetro cattedrale

Diecast aluminium lantern black brush gold finish with cathedral glass diffuser



E27
Attacco sorgente
Light Source

LANT-PISA/AP1A
8031435561226
1XE27 MAX 60W

Lampadina non inclusa
Light bulb not included

Misure - size
dimensioni in mm - size mm





E27
Attacco sorgente
Light Source

LANT-PISA/AP1B
8031435571225
1XE27 MAX 60W

Lampadina non inclusa
Light bulb not included

Misure - size
dimensioni in mm - size mm





E27
Attacco sorgente
Light Source

LANT-PISA/S1
8031435541228
1XE27 MAX 60W

Lampadina non inclusa
Light bulb not included

Misure - size
dimensioni in mm - size mm





E27
Attacco sorgente
Light Source

LANT-PISA/L1
8031435551227
1XE27 MAX 60W

Lampadina non inclusa
Light bulb not included

Misure - size
dimensioni in mm - size mm





E27
Attacco sorgente
Light Source

LANT-PISA/P1
8031435531229
1XE27 MAX 60W

Lampadina non inclusa
Light bulb not included

Misure - size
dimensioni in mm - size mm



APPLIQUE SOSPENSIONI E PALETTI CORRELATI / *WALL SOSPENSION AND FLOOR LAMP COMBINED*

FIRENZE

Lanterne in alluminio pressofuso nero pennelato argento con diffusore in vetro trasparente

Diecast aluminium lantern black brush silver with clear glass diffuser



IP44



E27
Attacco sorgente
Light Source

LANT-FIRENZE/AP1A
8031430701177
1XE27 MAX 60W

Lampadina non inclusa
Light bulb not included

Misure - size
dimensioni in mm - size mm





E27
Attacco sorgente
Light Source

LANT-FIRENZE/AP1B
8031430711176
1XE27 MAX 60W

Lampadina non inclusa
Light bulb not included

Misure - size
dimensioni in mm - size mm





E27
Attacco sorgente
Light Source

LANT-FIRENZE/S1
8031430741173
1XE27 MAX 60W

Lampadina non inclusa
Light bulb not included

Misure - size
dimensioni in mm - size mm





E27
Attacco sorgente
Light Source

LANT-FIRENZE/P1
8031430721175
1XE27 MAX 60W

Lampadina non inclusa
Light bulb not included

Misure - size
dimensioni in mm - size mm





E27
Attacco sorgente
Light Source

LANT-FIRENZE/P3
8031430731174
3XE27 MAX 60W

Lampadina non inclusa
Light bulb not included

Misure - size
dimensioni in mm - size mm



SANTIAGO

Lanterne in alluminio pressofuso nero pennellato verde con diffusore in vetro trasparente

Diecast aluminium lantern black brush green with clear glass diffuser

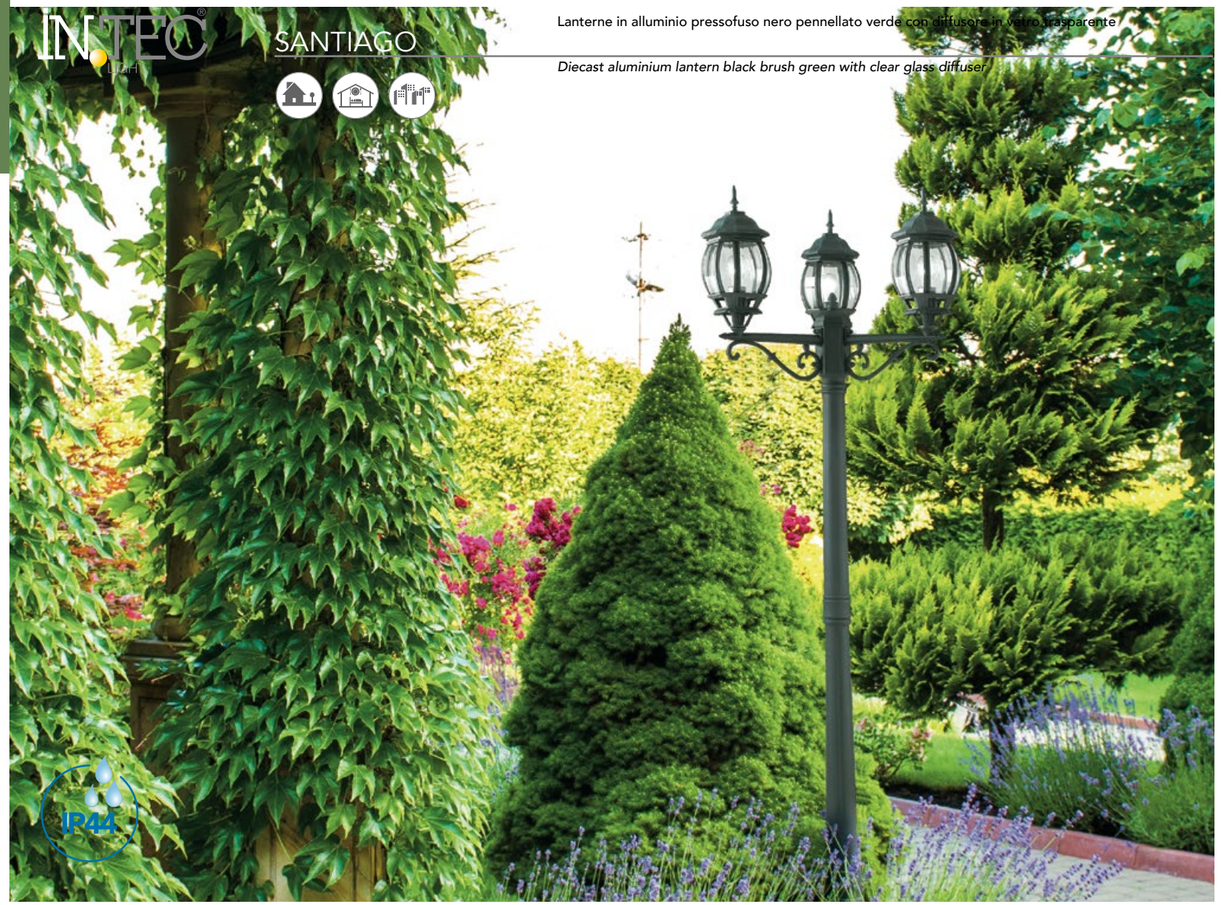



E27
Attacco sorgente
Light Source

LANT-SANTIAGO/AP1A
8031430801174 — **1XE27 MAX 60W**

Lampadina non inclusa
Light bulb not included

Misure - size
dimensioni in mm - size mm





E27
Attacco sorgente
Light Source

LANT-SANTIAGO/AP1B
8031430811173 — **1XE27 MAX 60W**

Lampadina non inclusa
Light bulb not included

Misure - size
dimensioni in mm - size mm





E27
Attacco sorgente
Light Source

LANT-SANTIAGO/S1
8031430841170 — **1XE27 MAX 60W**

Lampadina non inclusa
Light bulb not included

Misure - size
dimensioni in mm - size mm





E27
Attacco sorgente
Light Source

LANT-SANTIAGO/P1
8031430821172 — **1XE27 MAX 60W**

Lampadina non inclusa
Light bulb not included

Misure - size
dimensioni in mm - size mm





E27
Attacco sorgente
Light Source

LANT-SANTIAGO/P3
8031430831171 — **3XE27 MAX 60W**

Lampadina non inclusa
Light bulb not included

Misure - size
dimensioni in mm - size mm





VENEZIA

Lanterne in alluminio pressofuso con finiture in colore rame con diffusore in policarbonato trasparente
Aluminium die-cast lantern with copper colour finish and clear policarbonate diffuser

IP34



E27
Attacco sorgente
Light Source

LANT-VENEZIA-AP1A
8031440312004
1XE27 MAX 60W

Lampadina non inclusa
Light bulb not included

Misure - size
dimensioni in mm - size mm





E27
Attacco sorgente
Light Source

LANT-VENEZIA-AP1B
8031440311991
1XE27 MAX 60W

Lampadina non inclusa
Light bulb not included

Misure - size
dimensioni in mm - size mm





E27
Attacco sorgente
Light Source

LANT-VENEZIA-S1
8031440313285
1XE27 MAX 60W

Lampadina non inclusa
Light bulb not included

Misure - size
dimensioni in mm - size mm





E27
Attacco sorgente
Light Source

LANT-VENEZIA-L1
8031440311984
1XE27 MAX 60W

Lampadina non inclusa
Light bulb not included

Misure - size
dimensioni in mm - size mm





E27
Attacco sorgente
Light Source

LANT-VENEZIA-P1
8031440313308
1XE27 MAX 60W

Lampadina non inclusa
Light bulb not included

Misure - size
dimensioni in mm - size mm





E27
Attacco sorgente
Light Source

LANT-VENEZIA-P3
8031440313292
3XE27 MAX 60W

Lampadina non inclusa
Light bulb not included

Misure - size
dimensioni in mm - size mm



CE

APPLIQUE SOSPENSIONI E PALETTI CORRELATI / *WALL SOSPENSION AND FLOOR LAMP COMBINED*

PAVIA

Lanterne in alluminio pressofuso nero goffrato con diffusore in acrilico trasparente

Die-cast aluminium lantern in embossed black colour with clear acrylic diffuser

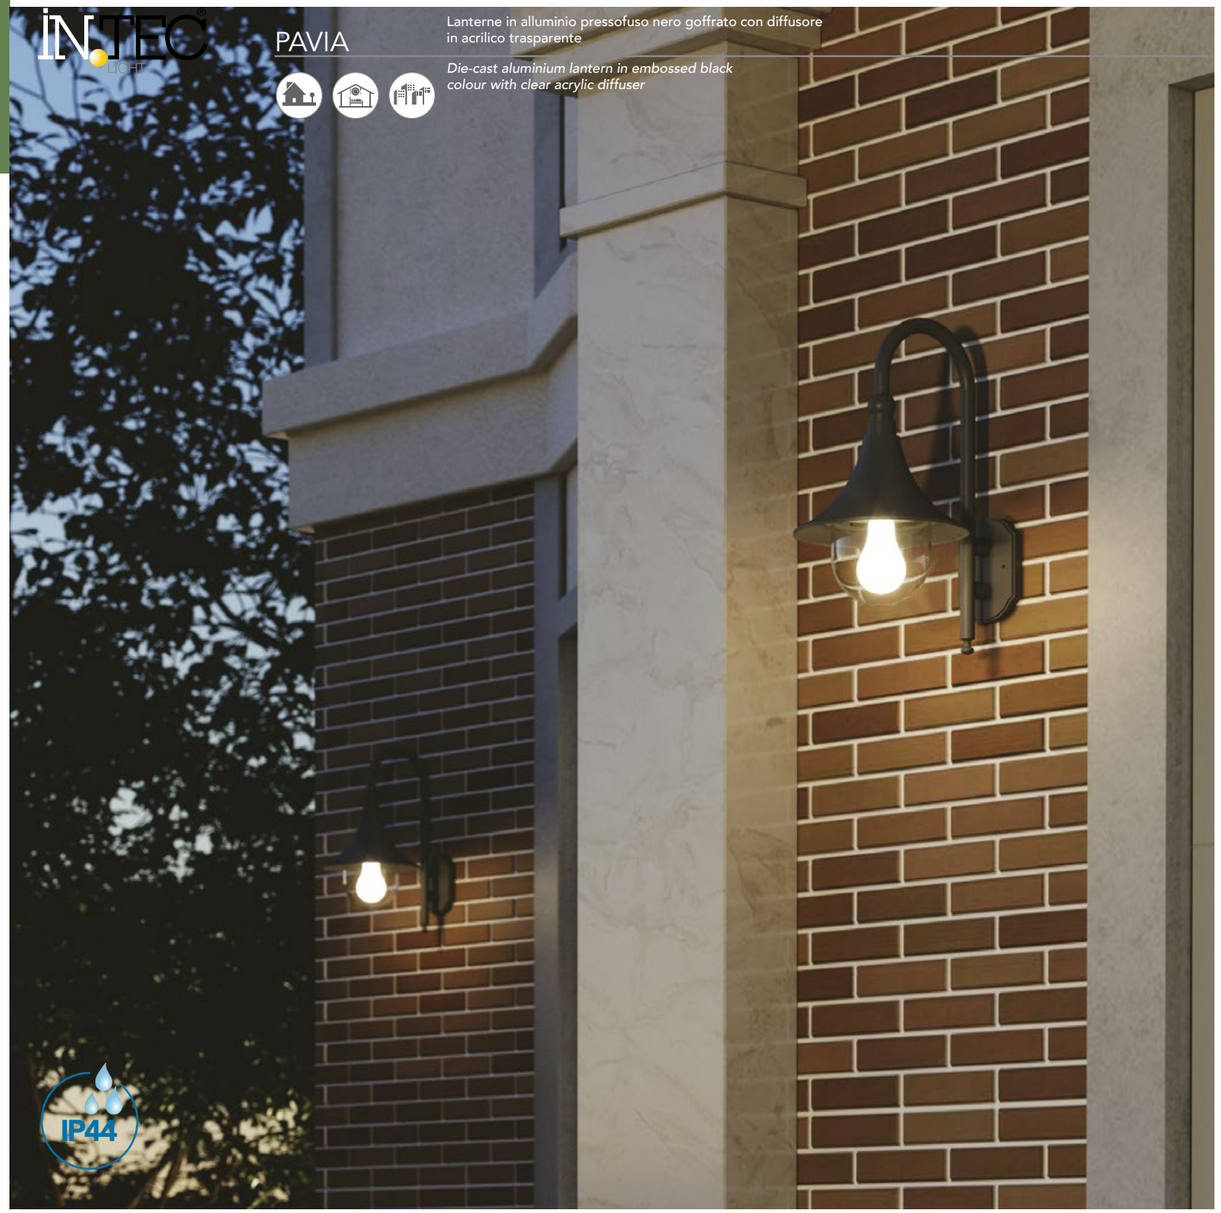



E27
Attacco sorgente
Light Source

LANT-PAVIA-AP1
8031440312028
1XE27 MAX 60W

Lampadina non inclusa
Light bulb not included

Misure - size
dimensioni in mm - size mm





E27
Attacco sorgente
Light Source

LANT-PAVIA-S1
8031440312042
1XE27 MAX 60W

Lampadina non inclusa
Light bulb not included

Misure - size
dimensioni in mm - size mm





E27
Attacco sorgente
Light Source

LANT-PAVIA-P1
8031440312035
1XE27 MAX 60W

Lampadina non inclusa
Light bulb not included

Misure - size
dimensioni in mm - size mm





E27
Attacco sorgente
Light Source

LANT-PAVIA-P3
8031440312011
3XE27 MAX 60W

Lampadina non inclusa
Light bulb not included

Misure - size
dimensioni in mm - size mm





BRIGHTMAX

Modulo LED per lampioni con alimentatore OSRAM OT60 dali

LED module for lampposts with OSRAM OT60 dali power supply

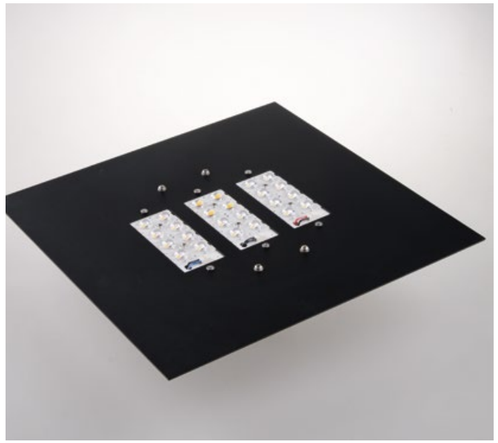

Materiale
Alluminio

Colore
Nero

Sorgente luminosa
LED SMD 60W

Driver
incluso DALI

Temperatura colore
2700K 4000K

Flusso luminoso
7200 Lm

Durata e on/off
50.000 h ~ >25.000 on/off

Angolo di luce
360°

CRI
>70

Material
Aluminium

Colour
Black

Light source
LED SMD 60W

Driver
included DALI

Colour temperature
2700K 4000K

Luminous flux
7200 Lm

Life time and on/off
50.000 h ~ >25.000 on/off

Beam angle
360°

CRI
>70

BRIGHTMAX-60M 8031414883905		60W	7200 LM
BRIGHTMAX-60C 8031414883899		60W	7200 LM

Misure - Size
dimensioni in mm - size mm

Staffa di fissaggio
Mounitng bracket

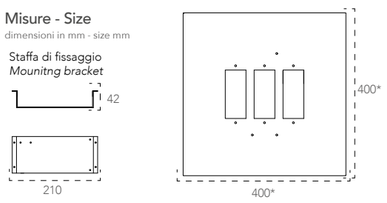

* La piastra può essere tagliata fino a una dimensione di 220x220mm
The plate can be cut up to a size of 220x220mm

Fotometria del Prodotto
Photometric curve of the product



beam angle 360°

BRIGHTMAX-LENS 8031414883912	**Lente bi-asimmetrico e tri-asimmetrico** ***be-asymmetric and three-asymmetric lens***

Fotometria del Prodotto
Photometric curve of the product



beam angle be-asymmetric



beam angle three-asymmetric

MEZZANOTTE VIRTUALE - *Virtual Midnight*

Sistema indipendente della riduzione della luce in **5 STEP**
il modulo LED è programmato con un determinato programma (personalizzabile su richiesta) per ottimizzare il risparmio energetico durante le ore notturne.
L'apparecchio prevede un sistema di autoapprendimento che determina in maniera autonoma, in base alle accensioni e agli spegnimenti pregressi, il punto di "mezzanotte virtuale".
La mezzanotte virtuale è il punto che determina la riduzione di flusso in base al profilo impostato, lasciando invariato l'impianto.
Per un corretto funzionamento del sistema "mezzanotte virtuale" è necessario un' accensione e uno spegnimento regolare quotidiano.

indipendent system of light reduction in 5 steps
The LED module is set with a specific program (customizable) to optimize the energy saving time during night hours.
The device is equipped with a outo-feedback system which determine indipendently, the Virtual Midnigh point based on the past switch on-switch-off time record.
Virtual Midnight is the point which determines the light flux reduction based on the set profile, keeping the electrical system untouched. For a correct working of the system of Virtual Midnight it is necessary a daily regular cycle of switching on-off.

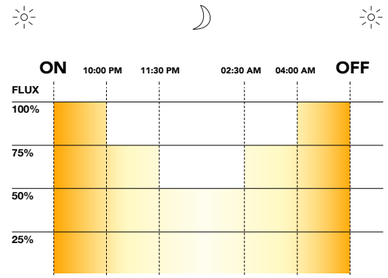

Impostazioni di fabbrica - *Default Settings*	
Orario - Hours	Flusso - flux
ON ÷ 10:00	100%
10:00 ÷ 11:30	75%
11:30 ÷ 02:30	50%
02:30 ÷ 04:00	75%
04:00 ÷ OFF	100%

BARRET

Segnapassi incasso

Recessed light



Materiale
Alluminio

Colore
Finitura nickel

Sorgente luminosa
LED SMD 1W

Driver
350mA 3,5V corrente costante
non incluso

Temperatura colore
3000K - 4000K

Flusso luminoso
80 Lm

Grado IP
IP67

Angolo di luce
40°

CRI
>80

Material
Aluminium

Colour
Nickel finish

Light source
LED SMD 1W

Driver
350mA 3,5V costant current
not included

Color temperature
3000K - 4000K

Luminous flux
80 Lm

IP degree
IP67

Beam angle
40°

CRI
>80



Fotometria del Prodotto

Photometric curve of the product



LED-BARRET-R24

LED-BARRET-R24C 8031440355070		1W 3,5V DC
LED-BARRET-R24 8031440364416		1W 3,5V DC

Misure - size
dimensioni in mm - size mm



Accessori inclusi
Accessories included

Cavo 1m incluso
Included 1m cable

x1
Cassetta di derivazione
Recessed box



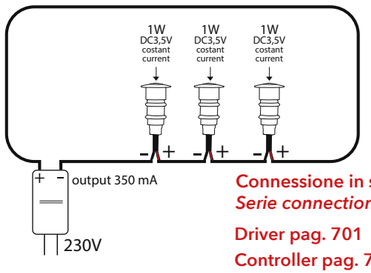

Connessione in serie
Serie connection system

Driver pag. 701
Controller pag. 708

SUBWAY

Segnapassi incasso

Recessed light

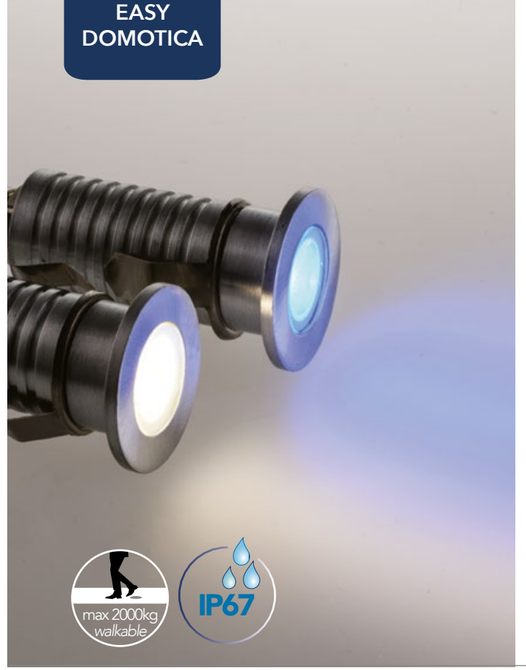

Materiale
Alluminio

Colore
Finitura nickel

Sorgente luminosa
LED SMD 3W

Driver
DC 12-24V tensione costante
non incluso

Temperatura colore
3000K 4000K BLU

Flusso luminoso
135 Lm - 173 Lm - 53 Lm

Angolo di luce
15°

CRI
>80

Grado IK
IK07

Material
Aluminium

Colour
Nickel finish

Light source
LED SMD 3W

Driver
DC 12-24V costant voltage
not included

Colour temperature
3000K 4000K BLU

Luminous flux
135 Lm - 173 Lm - 53 Lm

Beam angle
15°

CRI
>80

IK degree
IK07



Fotometria del Prodotto

Photometric curve of the product



LED-SUBWAY-R1

LED-SUBWAY-R1M 8031414877263		173 LM	12-24V
LED-SUBWAY-R1C 8031414879342		135 LM	12-24V
LED-SUBWAY-R1B 8031414877270		53 LM	12-24V

Foro - cut out
dimensioni in mm - size mm



Misure - Size
dimensioni in mm - size mm



Accessori inclusi

Cavo 1m incluso
Included 1m cable



Connessione in parallelo
Serie connection system

Driver pag. 701
Controller pag. 708

RIDER

Kit 6 pz segnapassi incasso

Materiale
Lega di zinco

Colore
Finitura silver

Sorgente luminosa
LED SMD 6x0,6W

Driver
Driver incluso 12V 6W DC

Temperatura colore
4000K

Flusso luminoso
100 Lm

Grado IP
IP65

Angolo di luce
105°

CRI
>80

Kit 6pcs recessed light

Material
Zinc alloy

Colour
Nickel finish

Light source
LED SMD 6x0,6W

Driver
Driver included 12V 6W DC

Colour temperature
4000K

Luminous flux
100 Lm

IP degree
IP65

Beam angle
105°

CRI
>80



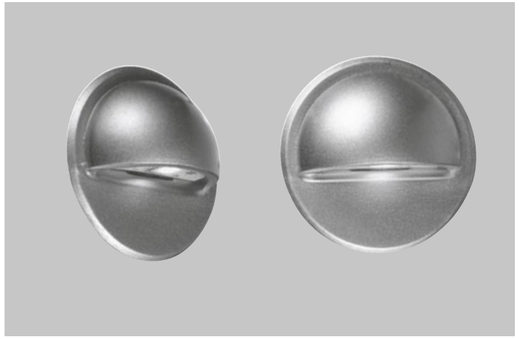

LED-RIDER-R6-DIR 8031439921279 6X0,6W

Misure - size
dimensioni in mm - size mm

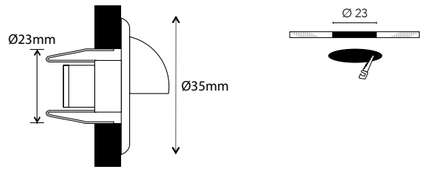

Accessori inclusi
Accessories included

x6	x1



Fotometria del Prodotto
Photometric curve of the product



LED-RIDER-R6-DIR

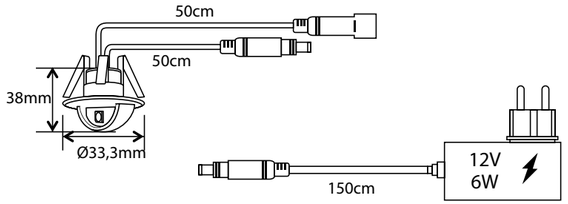

RIDER

Kit 6 pz segnapassi incasso

Materiale
Acciaio

Colore
Acciaio

Sorgente luminosa
LED SMD 6x0,6W

Driver
Driver incluso 12V 6W DC

Temperatura colore
4000K

Flusso luminoso
100 Lm

Grado IP
IP67

Angolo di luce
120°

CRI
>80

Kit 6pcs recessed light

Material
Steel

Colour
Stainless steel

Light source
LED SMD 6x0,6W

Driver
Driver included 12V 6W DC

Colour temperature
4000K

Luminous flux
100 Lm

IP degree
IP67

Beam angle
120°

CRI
>80

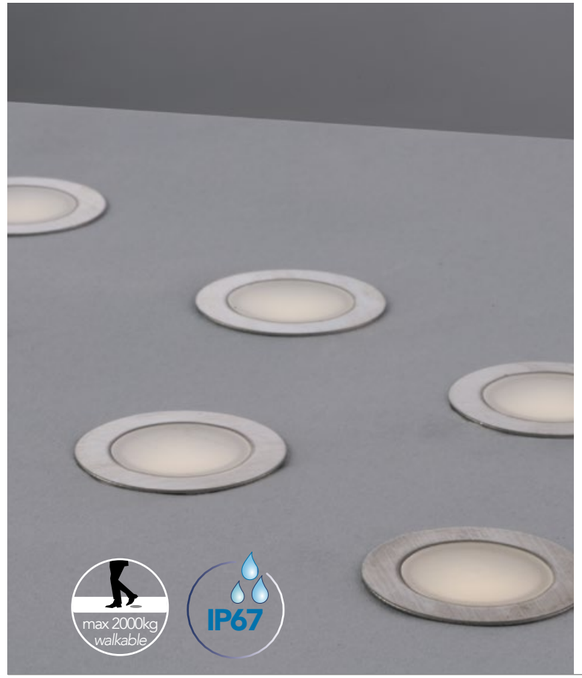



LED-RIDER-R6 8031436141236 6X0,6W

Misure - size
dimensioni in mm - size mm

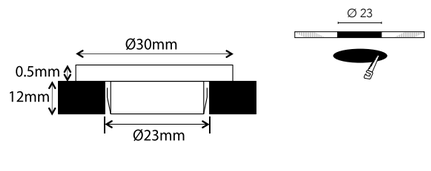

Accessori inclusi
Accessories included

x6	x1 cavo - cable 150 cm



Fotometria del Prodotto
Photometric curve of the product



LED-RIDER-R6

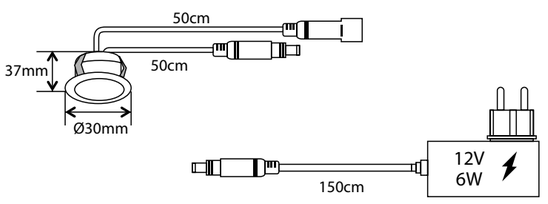

RIDER

Kit 6 pz segnapassi incasso

Kit 6pcs recessed light

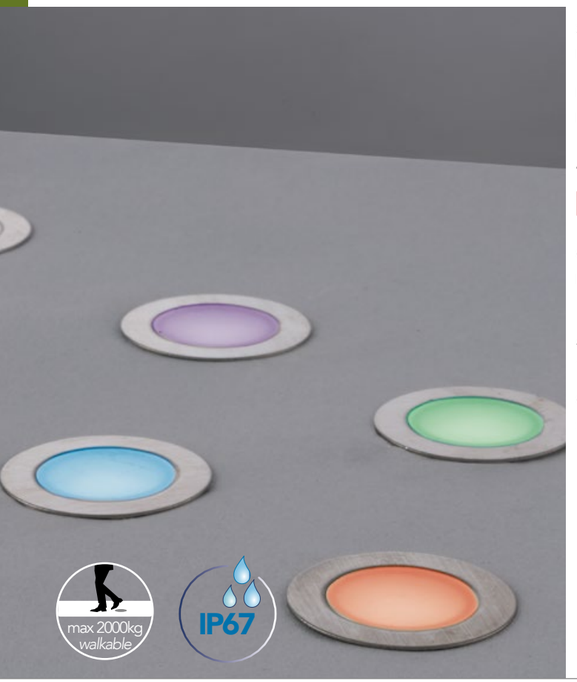

Materiale
Acciaio

Material
Steel

Colore
Finitura nickel

Colour
Nickel finish

Sorgente luminosa
LED SMD 6x0,6W

Source light
LED SMD 6x0,6W

Driver
Driver incluso 12V 6W

Driver
Driver included 12V 6W

Temperatura colore
R G B

Colour temperature
R G B

Grado IP
IP67

IP degree
IP67

Angolo di luce
120°

Beam angle
120°

CRI
>80

CRI
>80



LED-RIDER-R6-RGB
8031439871260
6X0,6W

Misure - size
dimensioni in mm - size mm

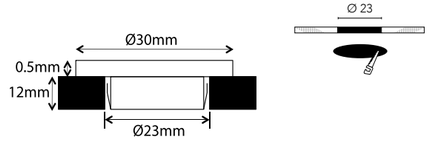

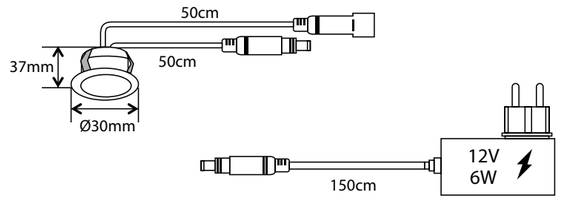

Accessori inclusi
Accessories included

x6 **x1** **x1**



IMPACT

Segnapassi incasso

Recessed light



Materiale
Alluminio

Material
Aluminium

Colore
Finitura nichel

Colour
Nickel finish

Sorgente luminosa
LED SMD 3W

Light source
LED SMD 3W

Driver
DC 24V tensione costante
non incluso

Driver
DC 24V costant voltage
not included

Temperatura colore
3000K - 4000K

Colour temperature
3000K - 4000K

Flusso luminoso
180 Lm

Luminous flux
180 Lm

Angolo di luce
105°

Beam angle
105°

CRI
>80

CRI
>80

Grado IK
IK10

IK degree
IK10



Fotometria del Prodotto
Photometric curve of the product

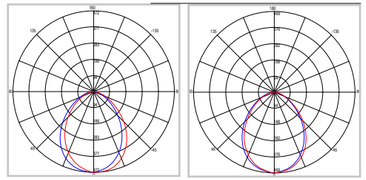

LED-IMPACT24V-R1C

LED-IMPACT24V-R1M

LED-IMPACT24V-R1C
8031414879298
3W DC 24V

LED-IMPACT24V-R1M
8031414879304
3W DC 24V

Misure - size
dimensioni in mm - size mm



Accessori inclusi
Accessories included

x1
Cassetta di derivazione
Recessed box

Cavo 1m incluso
Included 1m cable





Fotometria del Prodotto
Photometric curve of the product

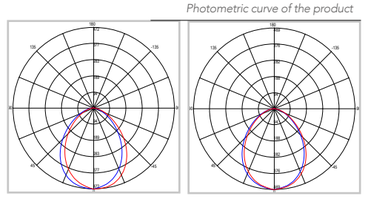

LED-IMPACT24V-Q1C

LED-IMPACT24V-Q1M

LED-IMPACT24V-Q1C
8031414879311
3W DC 24V

LED-IMPACT24V-Q1M
8031414879328
3W DC 24V

Misure - size
dimensioni in mm - size mm



Accessori inclusi
Accessories included

x1
Cassetta di derivazione
Recessed box

Cavo 1m incluso
Included 1m cable



Connessione in parallelo **Driver pag. 701**
Serie connection system **Controller pag. 708**

STEP

Segnapassi incasso a pavimento o parete

Inground and wall recessed light

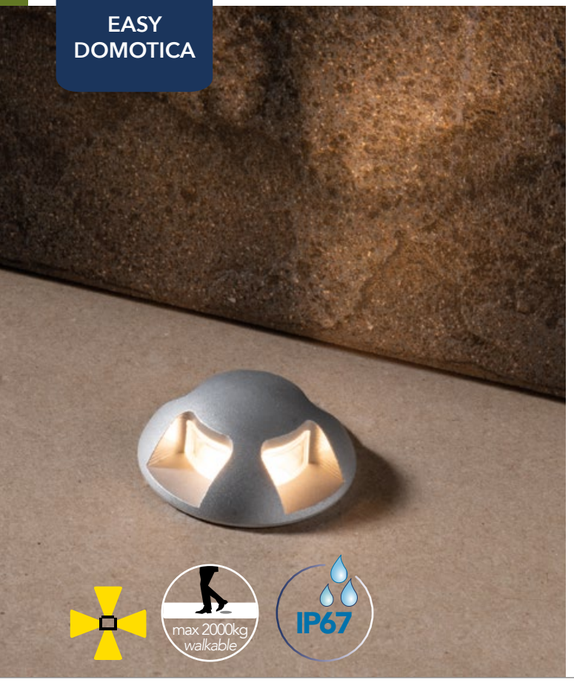

Materiale
Alluminio

Material
Aluminium

Colore
Finitura silver

Colour
Silver finish

Sorgente luminosa
LED SMD 3W

Light source
LED SMD 3W

Driver
DC 24V tensione costante
non incluso

Driver
DC 24V costant voltage
not included

Temperatura colore
3000K - 4000K

Colour temperature
3000K - 4000K

Flusso luminoso
180 Lm

Luminous flux
180 Lm

Grado IP
IP67

IP degree
IP67

Angolo di luce
105°

Beam angle
105°

CRI
>80

CRI
>80

Grado IK
IK10

IK degree
IK10



LED-STEP24V-R4C 8031414879274		**3W DC 24V**
LED-STEP24V-R4M 8031414879281		**3W DC 24V**

Misure - size
dimensioni in mm - size mm



Accessori inclusi
Accessories included

x1
Cassetta di derivazione
Recessed box



Cavo 1m incluso
Included 1m cable

Fotometria del Prodotto

Photometric curve of the product

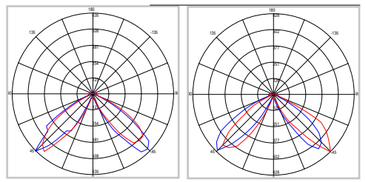

LED-STEP24V-R4C LED-STEP24V-R4M

Connessione in parallelo
Serie connection system

Driver pag. 701
Controller pag. 708

STEP

Segnapassi incasso a pavimento o parete

Inground and wall recessed light

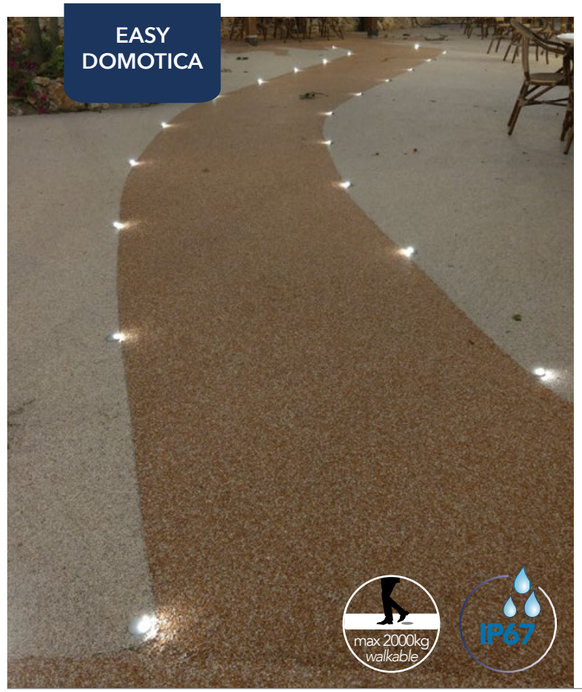

Materiale
Alluminio

Material
Aluminium

Colore
Finitura silver

Colour
Silver finish

Sorgente luminosa
LED SMD 3W

Light source
LED SMD 3W

Driver
DC 24V tensione costante
non incluso

Driver
DC 24V costant voltage
not included

Temperatura colore
3000K - 4000K

Colour temperature
3000K - 4000K

Flusso luminoso
180 Lm

Luminous flux
180 Lm

Grado IP
IP67

IP degree
IP67

Angolo di luce
105°

Beam angle
105°

CRI
>80

CRI
>80

Grado IK
IK10

IK degree
IK10



LED-STEP24V-R1C 8031414879250		**3W DC 24V**
LED-STEP24V-R1M 8031414879267		**3W DC 24V**

Misure - size
dimensioni in mm - size mm



Accessori inclusi
Accessories included

x1
Cassetta di derivazione
Recessed box



Cavo 1m incluso
Included 1m cable

Fotometria del Prodotto

Photometric curve of the product

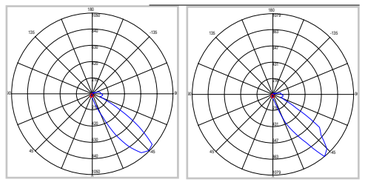

LED-STEP24V-R1C LED-STEP24V-R1M

Connessione in parallelo
Serie connection system

Driver pag. 701
Controller pag. 708

WALK

Faro calpestabile da incasso a pavimento

Walkable stainless steel built-in LED light



Materiale
Acciao inox

Material
Stainless steel

Sorgente luminosa
LED COB 3W- 8W - 12W

Light source
LED COB 3W- 8W - 12W

Driver
integrato

Driver
Built-in

Temperatura colore
3000K - 4000K

Colour temperature
3000K - 4000K

Flusso luminoso
160 Lm - 450 Lm - 750 Lm -1500 Lm

Luminous flux
160 Lm - 450 Lm - 750 Lm-1500 Lm

Angolo di luce
30°

Beam angle
30°

CRI
>80

CRI
>80

Grado IK
IK10

IK degree
IK10

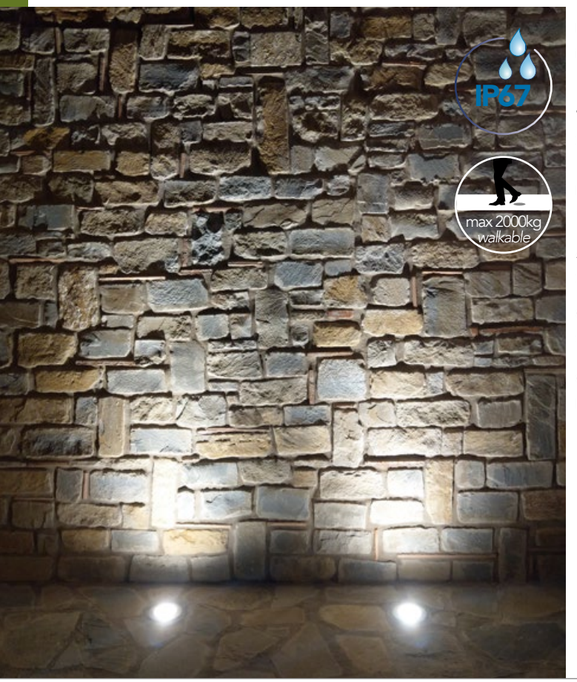





LED-WALK-RT 8031414882816	12W 1500 LM

Cassaforma
recessed box
dimensioni in mm - size mm



Misure - size
dimensioni in mm - size mm



Fotometria del Prodotto

Photometric curve of the product



LED-WALK-Q7 R7



LED-WALK-Q11 R11



LED-WALK-Q14 R14





LED-WALK-Q7C 8031414885824	3W 160 LM
LED-WALK-Q7 8031440355599	3W 160 LM

Cassaforma
recessed box
dimensioni in mm - size mm



Misure - size
dimensioni in mm - size mm







LED-WALK-Q11C 8031414885800	8W 450 LM
LED-WALK-Q11 8031440355575	8W 450 LM

Cassaforma
recessed box
dimensioni in mm - size mm



Misure - size
dimensioni in mm - size mm







LED-WALK-Q14C 8031414885817	12W 750 LM
LED-WALK-Q14 8031440355551	12W 750 LM

Cassaforma
recessed box
dimensioni in mm - size mm



Misure - size
dimensioni in mm - size mm







LED-WALK-R7C 8031414885855		3W 160 LM
LED-WALK-R7 8031440355582		3W 160 LM

Cassaforma
recessed box
dimensioni in mm - size mm



Misure - size
dimensioni in mm - size mm







LED-WALK-R11C 8031414885831		8W 450 LM
LED-WALK-R11 8031440355568		8W 450 LM

Cassaforma
recessed box
dimensioni in mm - size mm



Misure - size
dimensioni in mm - size mm



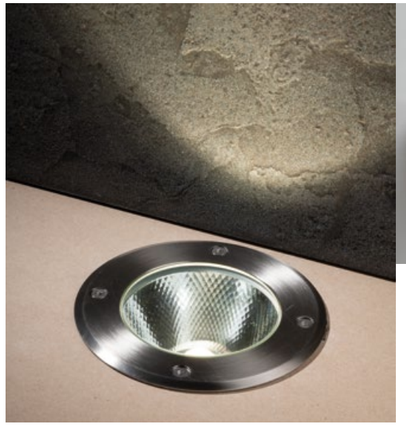



LED-WALK-R14C 8031414885848		12W 750 LM
LED-WALK-R14 8031440355544		12W 750 LM

Cassaforma
recessed box
dimensioni in mm - size mm



Misure - size
dimensioni in mm - size mm



HUMMER

Faro carrabile da incasso a pavimento, acciaio inox

Stainless steel driveover inground recessed lamp

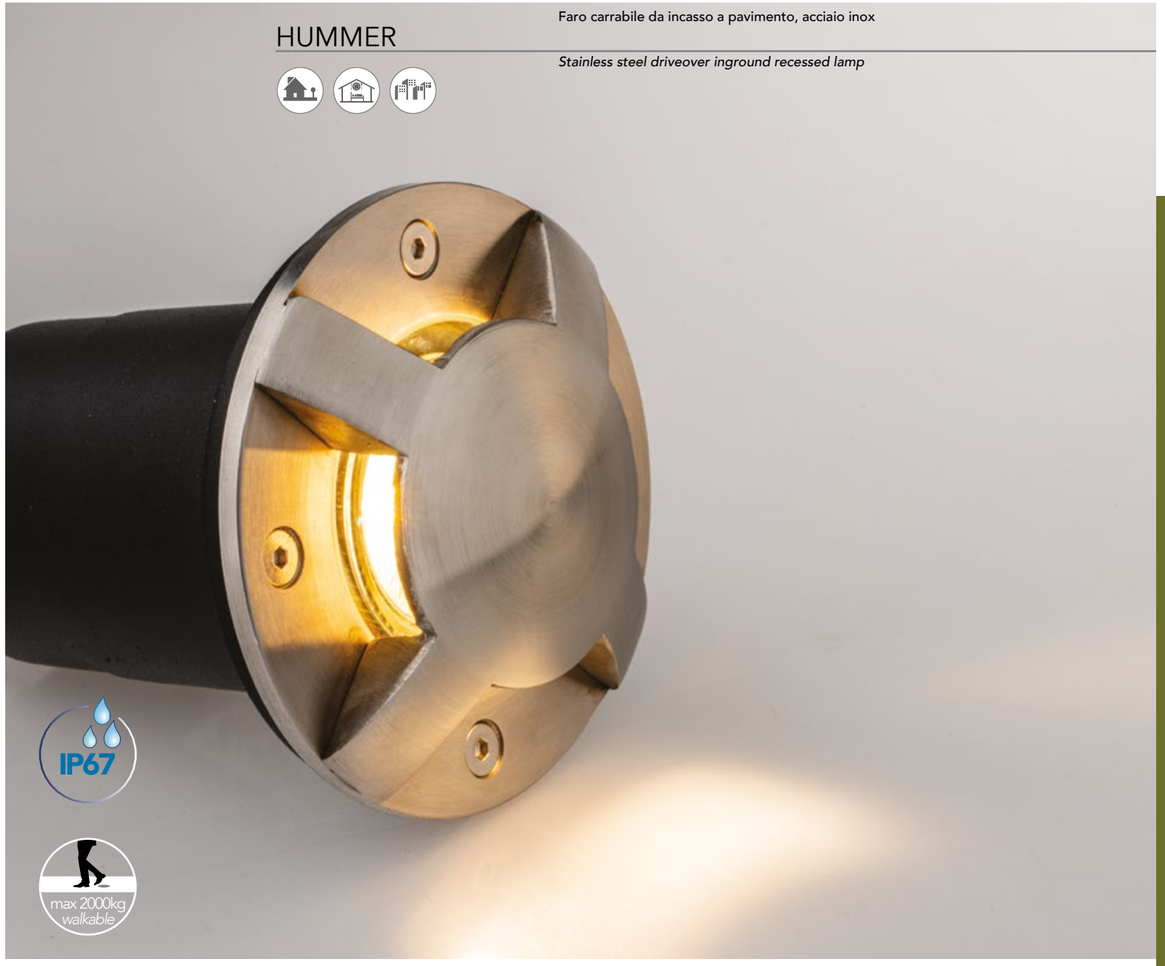



I-HUMMER-R4 8031414877249	1XGU10 MAX 35W

Lampadina non inclusa
Light bulb not included

Cassaforma
recessed box
dimensioni in mm - size mm



Misure - size
dimensioni in mm - size mm



DRIVE

Faro calpestabile da incasso a pavimento acciaio inox

Walkable stainless steel inground lamp







I-DRIVE-R1 — **1XGU10 MAX 42W**
8031440313261

Lampadina non inclusa
Light bulb not included

GU10
Attacco sorgente
Source

Cassaforma
recessed box
dimensioni in mm - size mm



Misure - size
dimensioni in mm - size mm







I-DRIVE-Q1 — **1XGU10 MAX 42W**
8031440313254

Lampadina non inclusa
Light bulb not included

GU10
Attacco sorgente
Source

Cassaforma
recessed box
dimensioni in mm - size mm



Misure - size
dimensioni in mm - size mm







I-DRIVE-M-R1 — **1XGU10 MAX 42W**
8031440313247

Lampadina non inclusa
Light bulb not included

GU10
Attacco sorgente
Source

Cassaforma
recessed box
dimensioni in mm - size mm



Misure - size
dimensioni in mm - size mm







I-DRIVE-E27 — **1XE27 MAX 60W**
8031440313230

Lampadina non inclusa
Light bulb not included

E27
Attacco sorgente
Source

Cassaforma
recessed box
dimensioni in mm - size mm



Misure - size
dimensioni in mm - size mm



INCASSI E SEGNAPASSI PER ESTERNI / *OUTDOOR INGROUND AND WALK LIGHT*

ELMO

Segnapassi in alluminio pressofuso

Die-cast aluminium steplight

IP54

Calpestabile
walkable

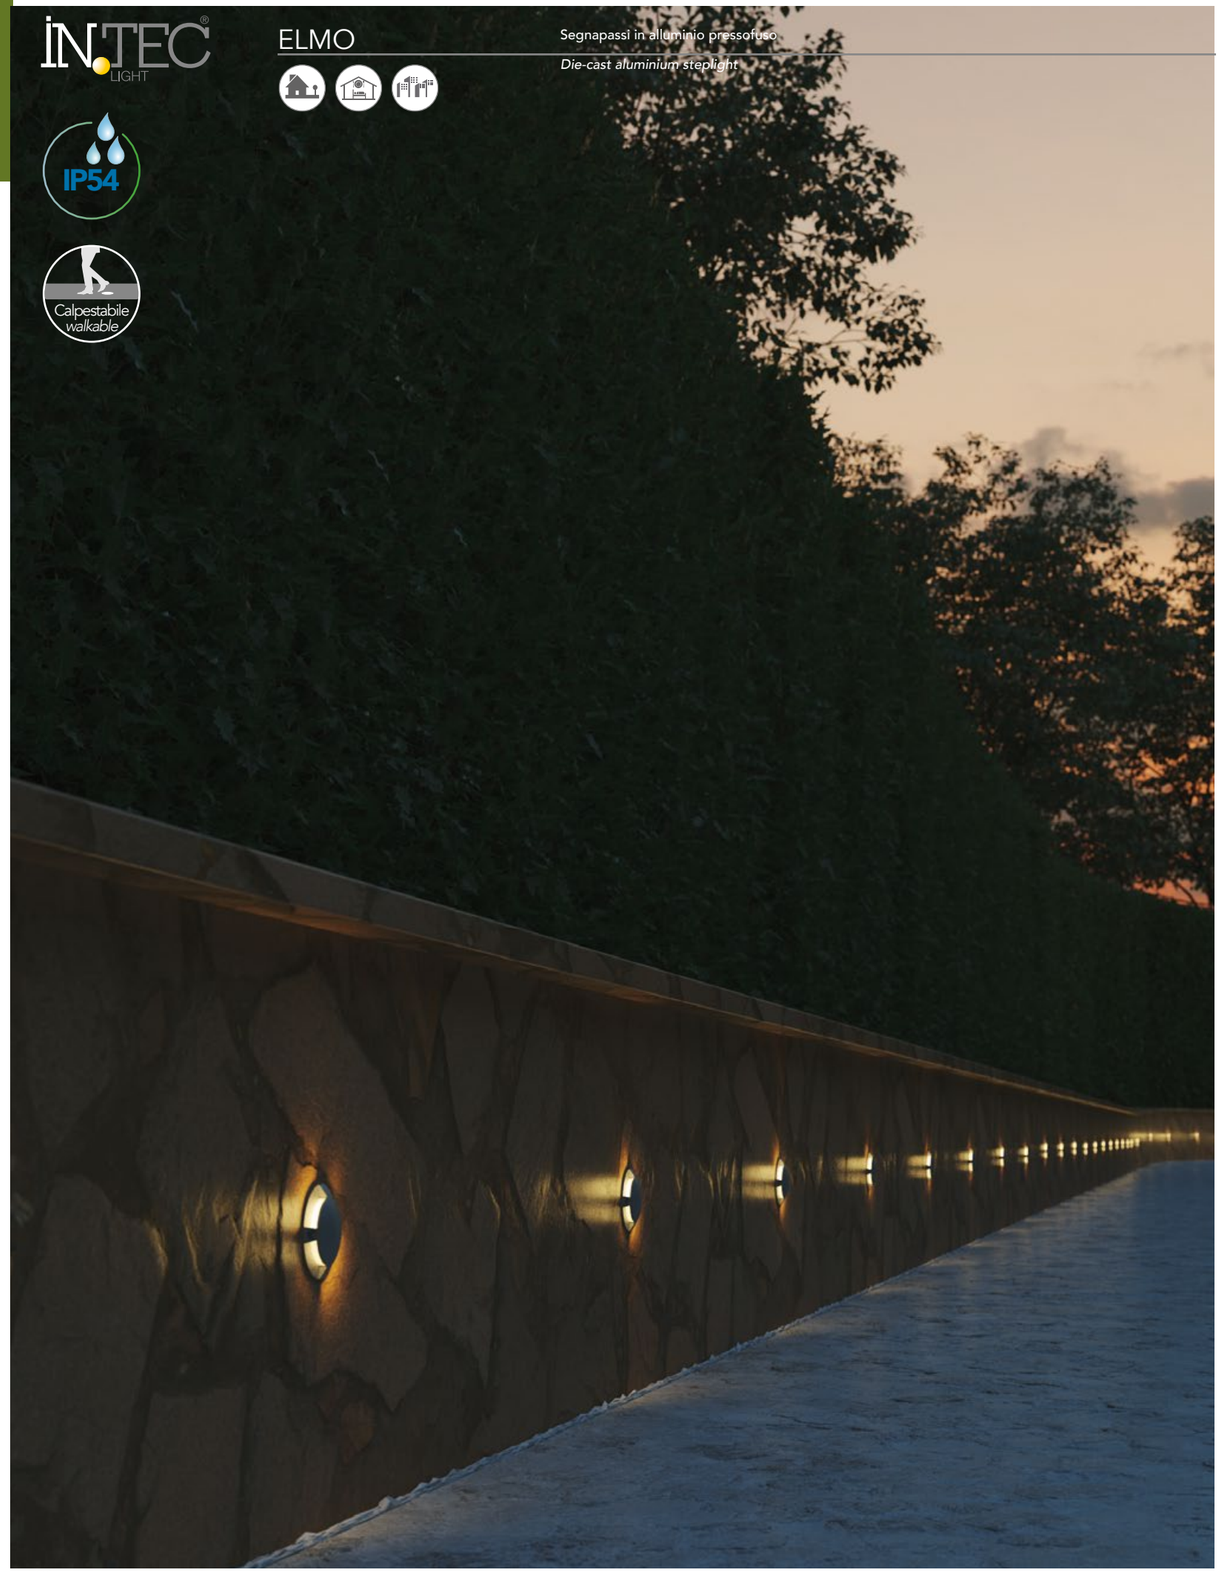

ELMO



Materiale
Alluminio

Sorgente luminosa
LED SMD 0,5W - 1W - 2W

Driver
DC 24V tensione costante
non incluso

Temperatura colore
3000K - 4000K

Flusso luminoso
59 Lm - 65 Lm
116 Lm - 121 Lm
226 Lm - 236 Lm

Material
Aluminium

Light source
LED SMD 0,5W - 1W - 2W

Driver
DC 24V costant voltage
not included

Colour temperature
3000K - 4000K

Luminous flux
59 Lm - 65 Lm
116 Lm - 121 Lm
226 Lm - 236 Lm

Grado IK
IK09

IK degree
IK09



LED-ELMO-R1C 8031414882823		**0,5W 59LM**
LED-ELMO-R1M 8031414882830		**0,5W 65LM**

Misure - size
dimensioni in mm - size mm



Cavo 1m incluso
Included 1m cable



LED-ELMO-R2C 8031414882847		**1W 116LM**
LED-ELMO-R2M 8031414882854		**1W 121LM**

Misure - size
dimensioni in mm - size mm



Cavo 1m incluso
Included 1m cable



LED-ELMO-R4C 8031414882861		**2W 226LM**
LED-ELMO-R4M 8031414882878		**2W 236LM**

Misure - size
dimensioni in mm - size mm



Cavo 1m incluso
Included 1m cable

ONYX

Segnapassi in alluminio pressofuso finitura nero o bianco goffrato

Die-cast aluminium steplight in embossed black or white finish

IP54

LED COB

Sorgente luminosa
Light source

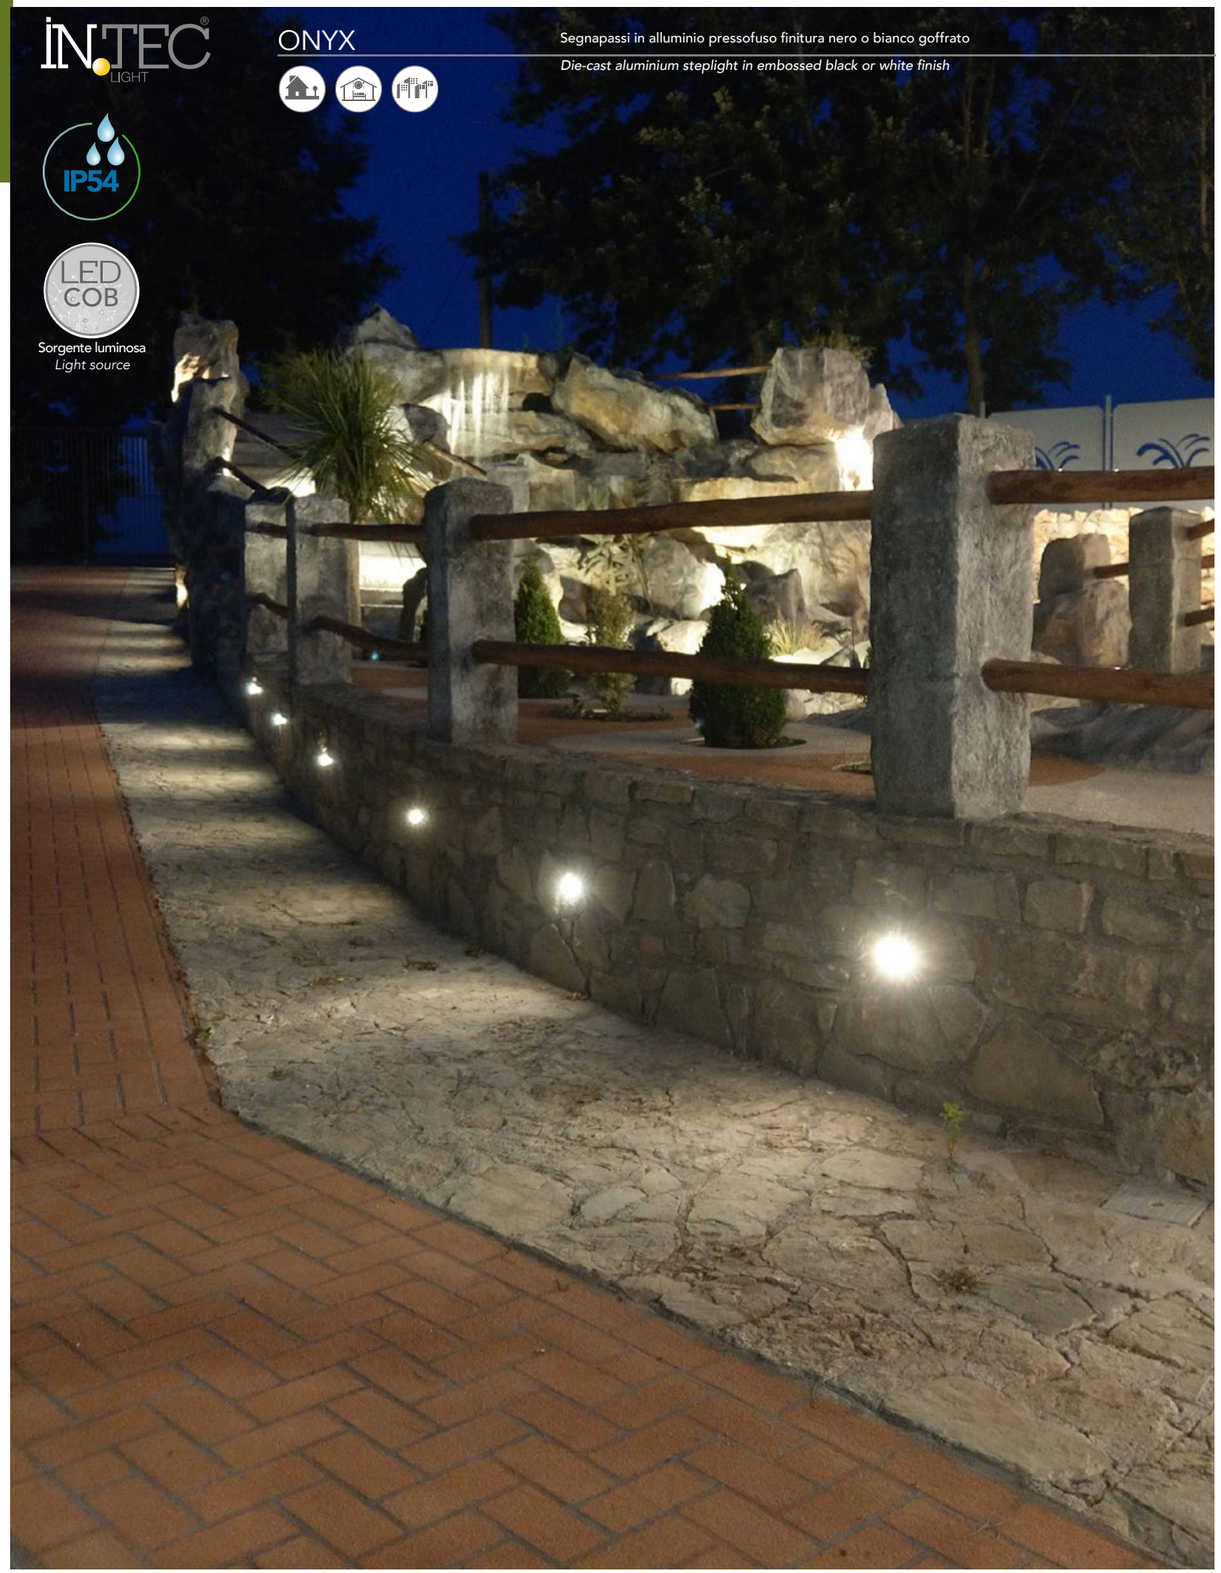

ONYX

Materiale
Alluminio

Sorgente luminosa
LED COB 2W

Driver
integrato

Temperatura colore
4000K

Flusso luminoso
144 Lm

Angolo di luce
45°

CRI
>80

Grado IK
IK10

Material
Aluminium

Light source
LED COB 2W

Driver
Built-in

Colour temperature
4000K

Luminous flux
144 Lm

Beam angle
45°

CRI
>80

IK degree
IK10



INC-ONYX-Q1 BCO 8031414864089		2W - 144 Lm
INC-ONYX-Q1 NERO 8031440361262		2W - 144 Lm

Misure - size
dimensioni in mm - size mm



Cassaforma
recessed box
dimensioni in mm - size mm





INC-ONYX-R1 BCO 8031440361248		2W - 144 Lm
INC-ONYX-R1 NERO 8031440361255		2W - 144 Lm

Misure - size
dimensioni in mm - size mm



Cassaforma
recessed box
dimensioni in mm - size mm



LYKAN

Segnapassi

Steplight



Materiale
Alluminio

Colore
Silver goffrato

Sorgente luminosa
LED SMD 2W - 3W

Driver
Integrato

Temperatura colore
4000K

Flusso luminoso
30 Lm - 110 Lm - 100 Lm

Angolo di luce
120°

CRI
>80

Material
Aluminium

Colour
Embossed silver

Light source
LED SMD 2W - 3W

Driver
Built-in

Colour temperature
4000K

Luminous flux
30 Lm - 110 Lm - 100 Lm

Beam angle
120°

CRI
>80



INC-LYKAN-Q90 8031440361033	**2W 30 LM**
INC-LYKAN-Q140 8031440361040	**3W 110 LM**

	INC-LYKAN-Q90	INC-LYKAN-Q140
Cassaforma *recessed box* dimensioni in mm - size mm		
Misure - size dimensioni in mm - size mm		



INC-LYKAN-RT 8031440361057	**3W 100 LM**

Cassaforma *recessed box* dimensioni in mm - size mm	
Misure - size dimensioni in mm - size mm	

BOLT

Segnapassi

Steplight



Materiale
Alluminio e acciaio

Colore
Finitura nickel

Sorgente luminosa
LED SMD 3W - 6W

Driver
integrato

Temperatura colore
4000K

Flusso luminoso
240 Lm - 480 Lm - 190 Lm

Angolo di luce
120°

CRI
>80

Material
Aluminium and steel

Colour
Nickel finish

Light source
LED SMD 3W - 6W

Driver
Built-in

Colour temperature
4000K

Luminous flux
240 Lm - 480 Lm - 190 Lm

Beam angle
120°

CRI
>80



INC-BOLT-Q71 8031440363556	**3W 240 LM**
INC-BOLT-RT170 8031440363525	**6W 480 LM**

	INC-BOLT-Q71	INC-BOLT-RT170
Cassaforma *recessed box* dimensioni in mm - size mm		
Misure - size dimensioni in mm - size mm		



INC-BOLT-GRILL 8031440363532	**6W 190 LM**

Cassaforma *recessed box* dimensioni in mm - size mm	
Misure - size dimensioni in mm - size mm	

SLAB

Incasso segnapassi alloggio in cassetta di derivazione 503, con diffusore in vetro temperato bianco

Down light for recess box 503 with white tempered glass diffuser



Materiale

Struttura in alluminio e diffusore in vetro temperato

Sorgente luminosa

LED SMD 3W - 5W

Driver

integrato

Temperatura colore

4000K

Flusso luminoso

100 Lm - 170 Lm

Angolo di luce

120°

CRI

>80

Material

Structure in aluminium and tempered glass diffuser

Light source

LED SMD 3W - 5W

Driver

Built-in

Colour temperature

4000K

Luminous flux

100 Lm - 170 Lm

Beam angle

120°

CRI

>80



INC-SLAB-503 8031414864683		3W	100 Lm

Misure - size
dimensioni in mm - size mm



Foro
dimensioni in mm - size mm





Scatola derivazione 503 non inclusa
503 junction box not included



INC-SLAB-506 8031414877232		5W	170 Lm

Misure - size
dimensioni in mm - size mm



Foro
dimensioni in mm - size mm





Scatola derivazione 506L non inclusa
506L junction box not included

BREEN

Incasso segnapassi alloggio in cassetta di derivazione 503, nei colori bianco o antracite goffrato

Down light for recess box 503 embossed white or antracyte colour

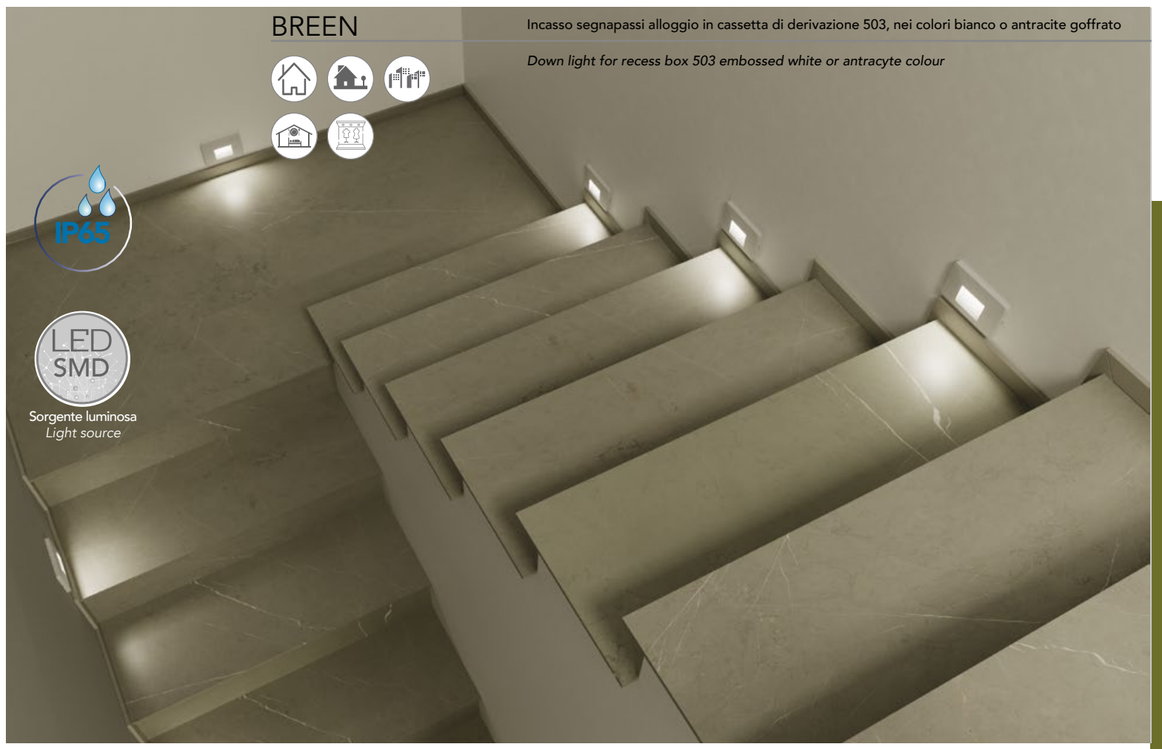



Materiale

Policarbonato

Colore

Bianco goffrato - antracite goffrato

Sorgente luminosa

LED SMD 3W

Driver

integrato

Temperatura colore

4000K

Flusso luminoso

150 Lm

Angolo di luce

45°

CRI

>80

Materiale

Polycarbonate

Colour

Embossed white - embossed antracyte

Light source

LED SMD 3W

Driver

Built-in

Colour temperature

4000K

Luminous flux

150 Lm

Beam angle

45°

CRI

>80



Scatola derivazione 503 non inclusa
503 junction box not included

INC-BREEN-503 BCO 8031414864690		3W - 150 Lm
INC-BREEN-503 ANT 8031414866809		3W - 150 Lm

Misure - size
dimensioni in mm - size mm



doppio sistema di fissaggio
double fixing system

fissaggio a muro
wall fixing

fissaggio su cassetta **503**
fixing on box **503**



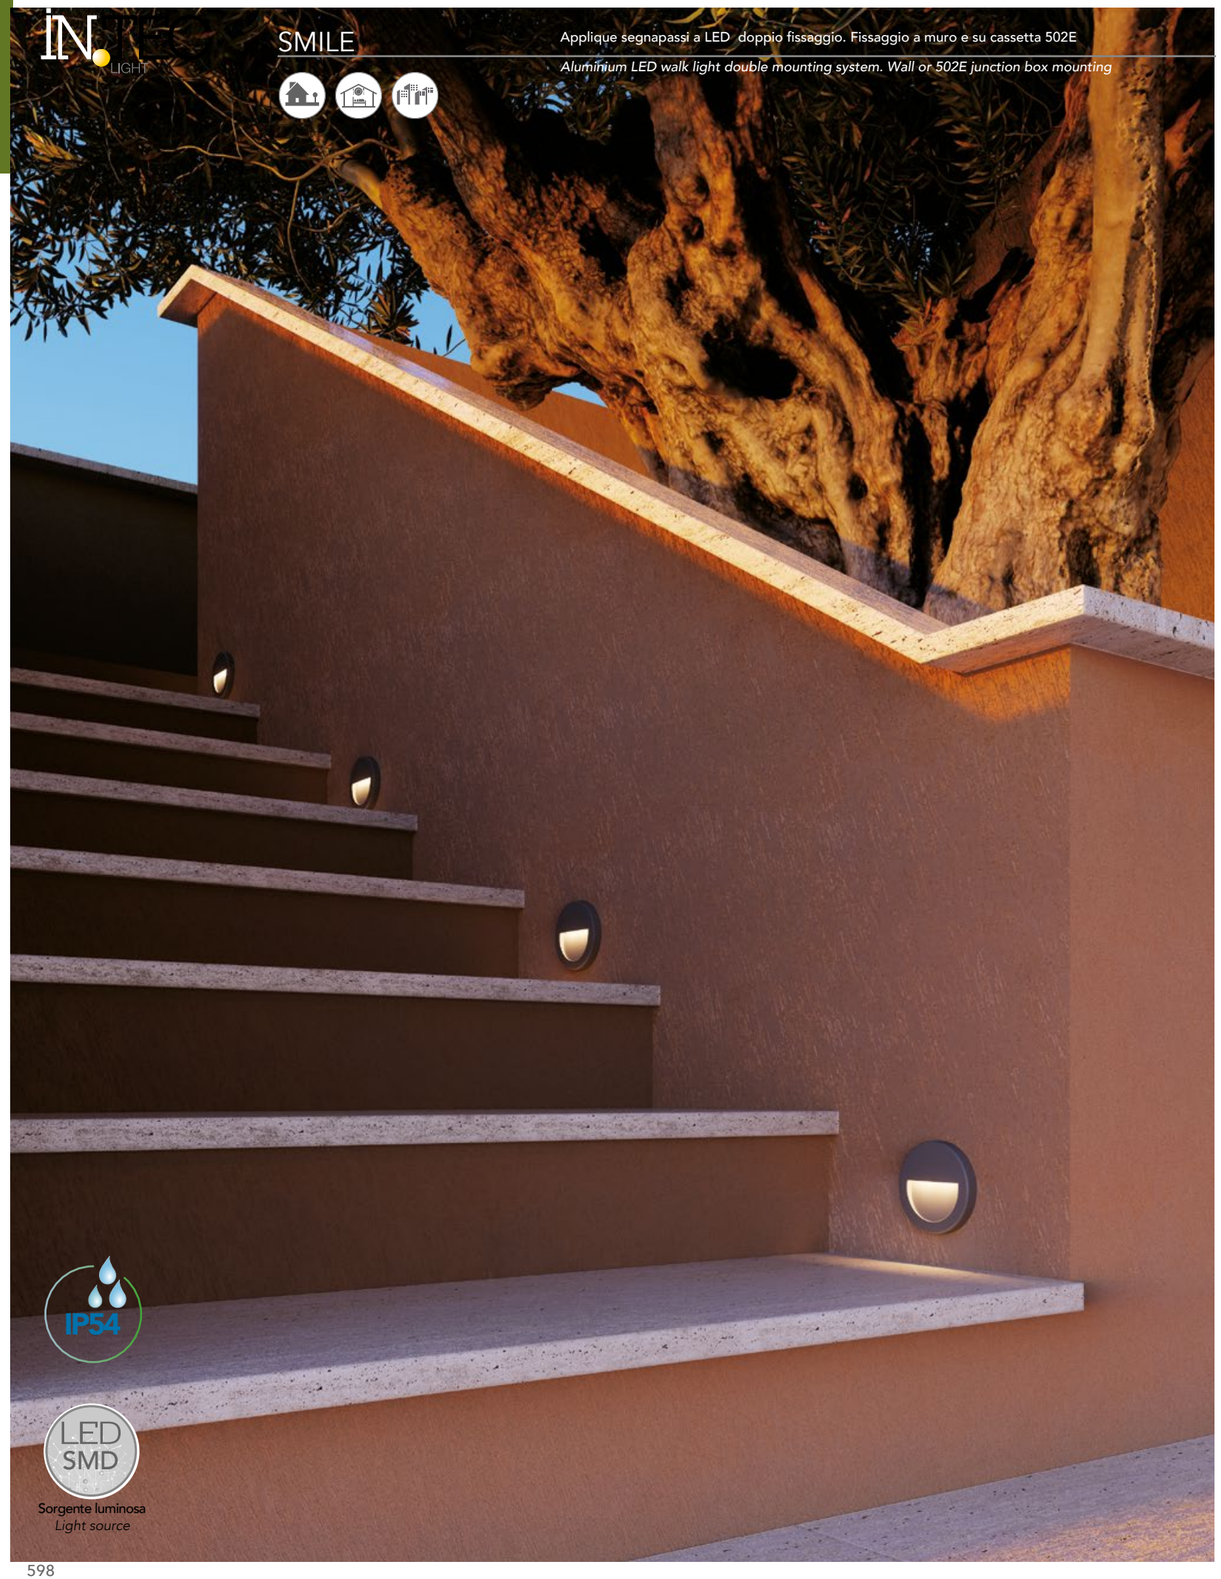

SMILE

Materiale	**Material**
PC	PC
Sorgente luminosa	**Light source**
LED SMD 2,5W	LED SMD 2,5W
Driver	**Driver**
integrato	Built-in
Temperatura colore	**Colour temperature**
4000K	4000K
Flusso luminoso	**Luminous flux**
180 Lm	180 Lm
Angolo di luce	**Beam angle**
100°	100°
CRI	**CRI**
>80	>80



LED-SMILE-BCO
8031414881574
2,5W - 180 Lm

Misure - size
dimensioni in mm - size mm



doppio sistema di fissaggio
double fixing system

fissaggio a muro
wall fixing

fissaggio su cassetta
502E
fixing on box **502E**
non inclusa
not included



LED-SMILE-ANT
8031414881567
2,5W - 180 Lm

Misure - size
dimensioni in mm - size mm



doppio sistema di fissaggio
double fixing system

fissaggio a muro
wall fixing

fissaggio su cassetta
502E
fixing on box **502E**
non inclusa
not included

BOLT

Incasso segnapassi alloggio in cassetta di derivazione 503 o 506L con doppia placchetta in acciaio intercambiabile nei colori nickel o bianco

Down light for recess box 503 or 506L with double interchangeable steel frame in nickel or white colours



Sorgente luminosa
Light source

BOLT



Materiale
PC e placchette in acciaio

Colore
Finitura nickel o bianco

Sorgente luminosa
LED SMD 3W - 5W

Driver
integrato

Temperatura colore
4000K

Flusso luminoso
200 Lm - 330 Lm

Angolo di luce
120°

CRI
>80

Material
PC and steel frames

Colour
Nickel or white finish

Light source
LED SMD 3W - 5W

Driver
Built-in

Colour temperature
4000K

Luminous flux
200 Lm - 330 Lm

Beam angle
120°

CRI
>80



INC-BOLT-503	3W	200 Lm
8031414862580		

Misure - size
dimensioni in mm - size mm



Accessori inclusi
Accessories included

2x placchette 2x staffette





Scatola derivazione 503 non inclusa
503 junction box not included



INC-BOLT-506	5W	330 Lm
8031414867967		

Misure - size
dimensioni in mm - size mm



Accessori inclusi
Accessories included

2x placchette 2x staffette





Scatola derivazione 506L non inclusa
506L junction box not included

BOLT

Incasso segnapassi alloggio in cassetta di derivazione 503 funzione con sensore di movimento e crepuscolare con doppia placchetta in acciaio intercambiabile nei colori nickel o bianco

Down light for recess box 503 and double sensor function motion and crepuscular with double interchangeable steel frame in nickel or white colours

Materiale
Alluminio e placchette in acciaio

Material
Aluminium and steel frames

Colore
Nickel o bianco

Colour
Nickel or white

Sorgente luminosa
LED SMD 3W

Light source
LED SMD 3W

Driver
Integrato

Driver
Built-in

Temperatura colore
4000K

Colour temperature
4000K

Flusso luminoso
200 Lm

Luminous flux
200 Lm

Angolo di luce
120°

Beam angle
120°

CRI
>80

CRI
>80

IP65

LED SMD
Sorgente luminosa
Light source



INC-BOLT-503S
8031414866281
3W 200 Lm

Misure - size
dimensioni in mm - size mm





Scatola derivazione 503 non inclusa
503 junction box not included

Accessori inclusi
Accessories included

2x placchette 2x staffette



sensore di movimento sensore crepuscolare



Installare più prodotti lateralmente ad una distanza minimo di 2 metri
Install multiple bolt 503S within 2 meters of each other



Non installare i prodotti uno di fronte all'altro per possibile conflitto
Do not install products face to face, as in image below, to avoid sensors conflict



Il prodotto non va installato vicino ad una fonte di luce intensa e costante superiore di 20 LUX
Do not install the bolt 503S near a light source with intensity over 20 LUX



BOLT

Incasso segnapassi alloggio in cassetta di derivazione 503 o 506L con doppia placchetta in acciaio intercambiabile nei colori nickel o bianco

Down light for recess box 503 or 506L with double interchangeable steel frame in nickel or white colours

Materiale
PC e placchette in acciaio

Material
PC and steel frames

Colore
Finitura nickel o bianco

Colour
Nickel or white finish

Sorgente luminosa
LED SMD 3W - 5W

Light source
LED SMD 3W - 5W

Driver
integrato

Driver
Built-in

Temperatura colore selezionabile
4000K - 6500K - 3000K

Selectable color temperature
4000K - 6500K - 3000K

Flusso luminoso
200 Lm - 330 Lm

Luminous flux
200 Lm - 330 Lm

Angolo di luce
120°

Beam angle
120°

CRI
>80

CRI
>80

IP65



Interruttore interno per la personalizzazione dei Kelvin.
Internal switch for customization of Kelvin.



INC-BOLT-503CCT
8031414881543
3W 200 Lm

Misure - size
dimensioni in mm - size mm





Scatola derivazione 503 non inclusa
503 junction box not included

Accessori inclusi
Accessories included

2x placchette 2x staffette





INC-BOLT-506CCT
8031414881550
5W 330 Lm

Misure - size
dimensioni in mm - size mm





Scatola derivazione 506L non inclusa
506L junction box not included

Accessori inclusi
Accessories included

2x placchette 2x staffette



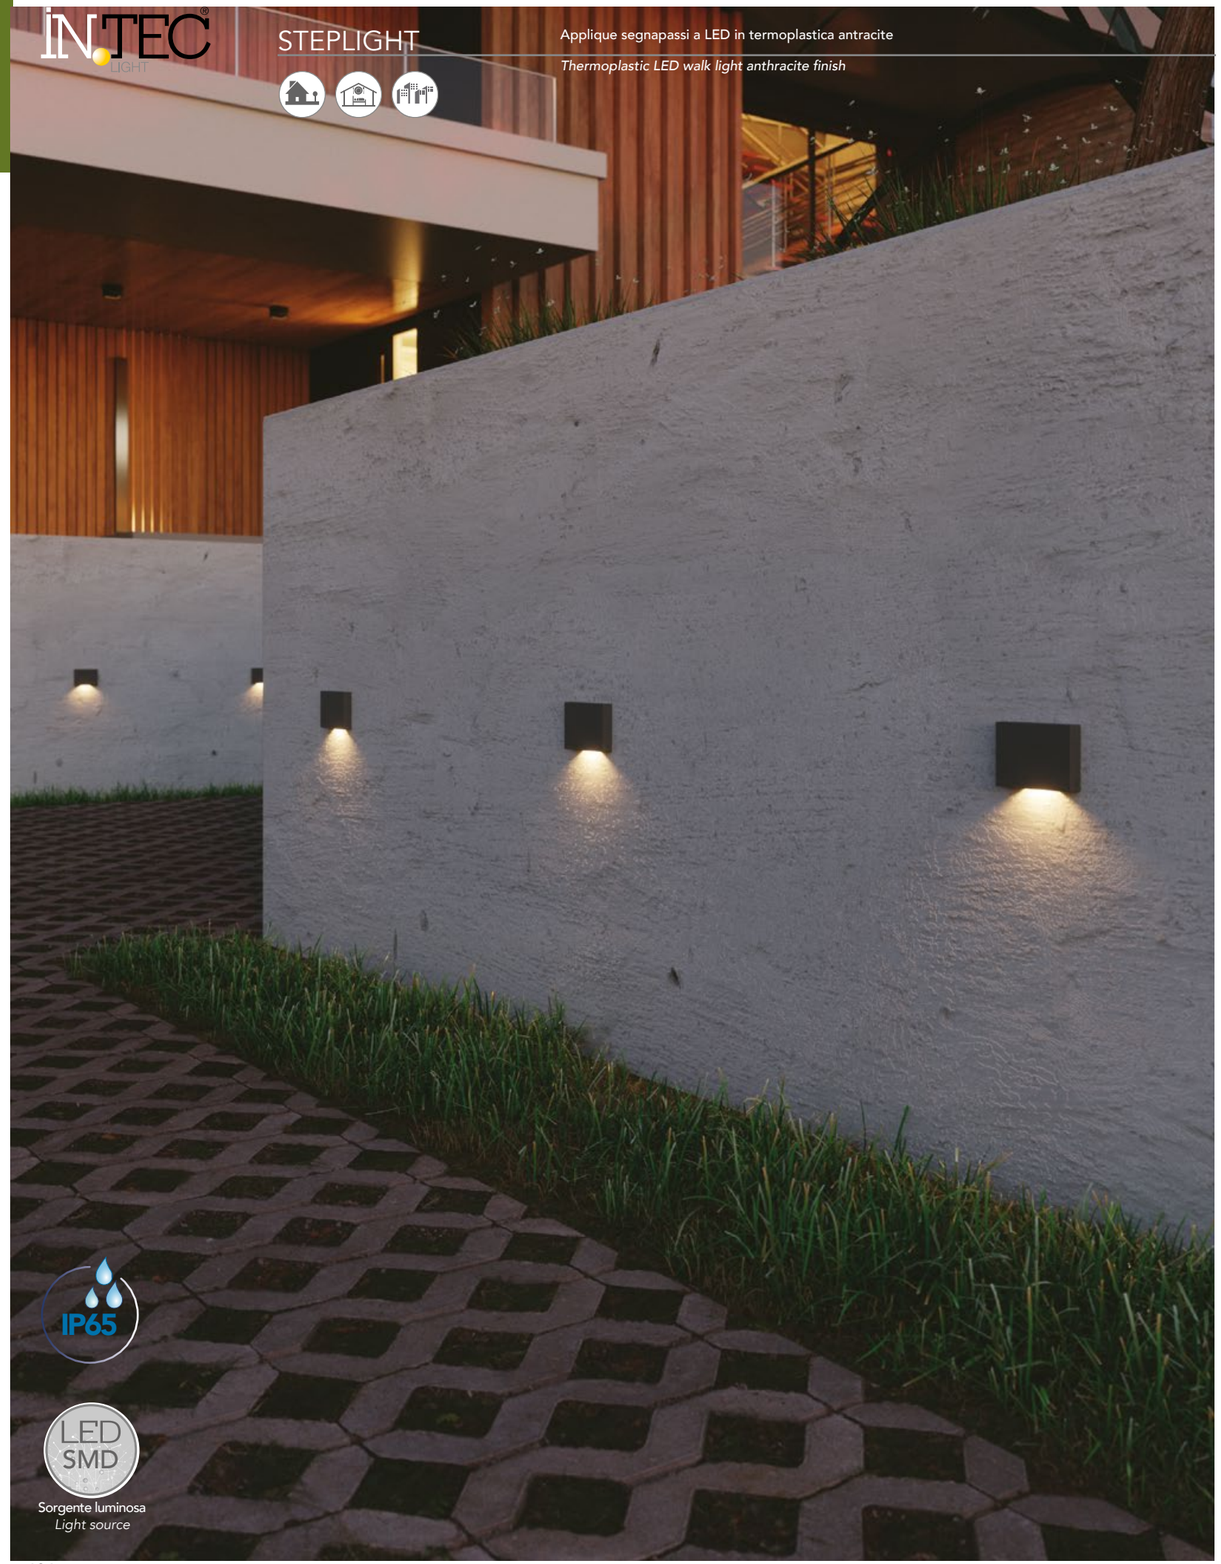

STEPLIGHT

Applique segnapassi a LED in termoplastica antracite

Thermoplastic LED walk light anthracite finish

STEPLIGHT

Materiale
Termoplastica

Colore
Antracite goffrato

Driver
integrato

Sorgente luminosa
LED SMD 1W

Temperatura colore
4000K

Angolo di luce
120°

CRI
>80

Grado IK
IK07

Material
Thermoplastic

Colour
Embossed antracyte

Driver
Built-in

Light source
LED SMD 1W

Color temperature
4000K

Beam angle
120°

CRI
>80

IK degree
IK07



LED-STEPLIGHT 8031414882304	1,5W 95LM

Misure - size
dimensioni in mm - size mm



SHELBY

Applique segnapassi a LED in alluminio antracite

Aluminium LED walk light anthracite finish

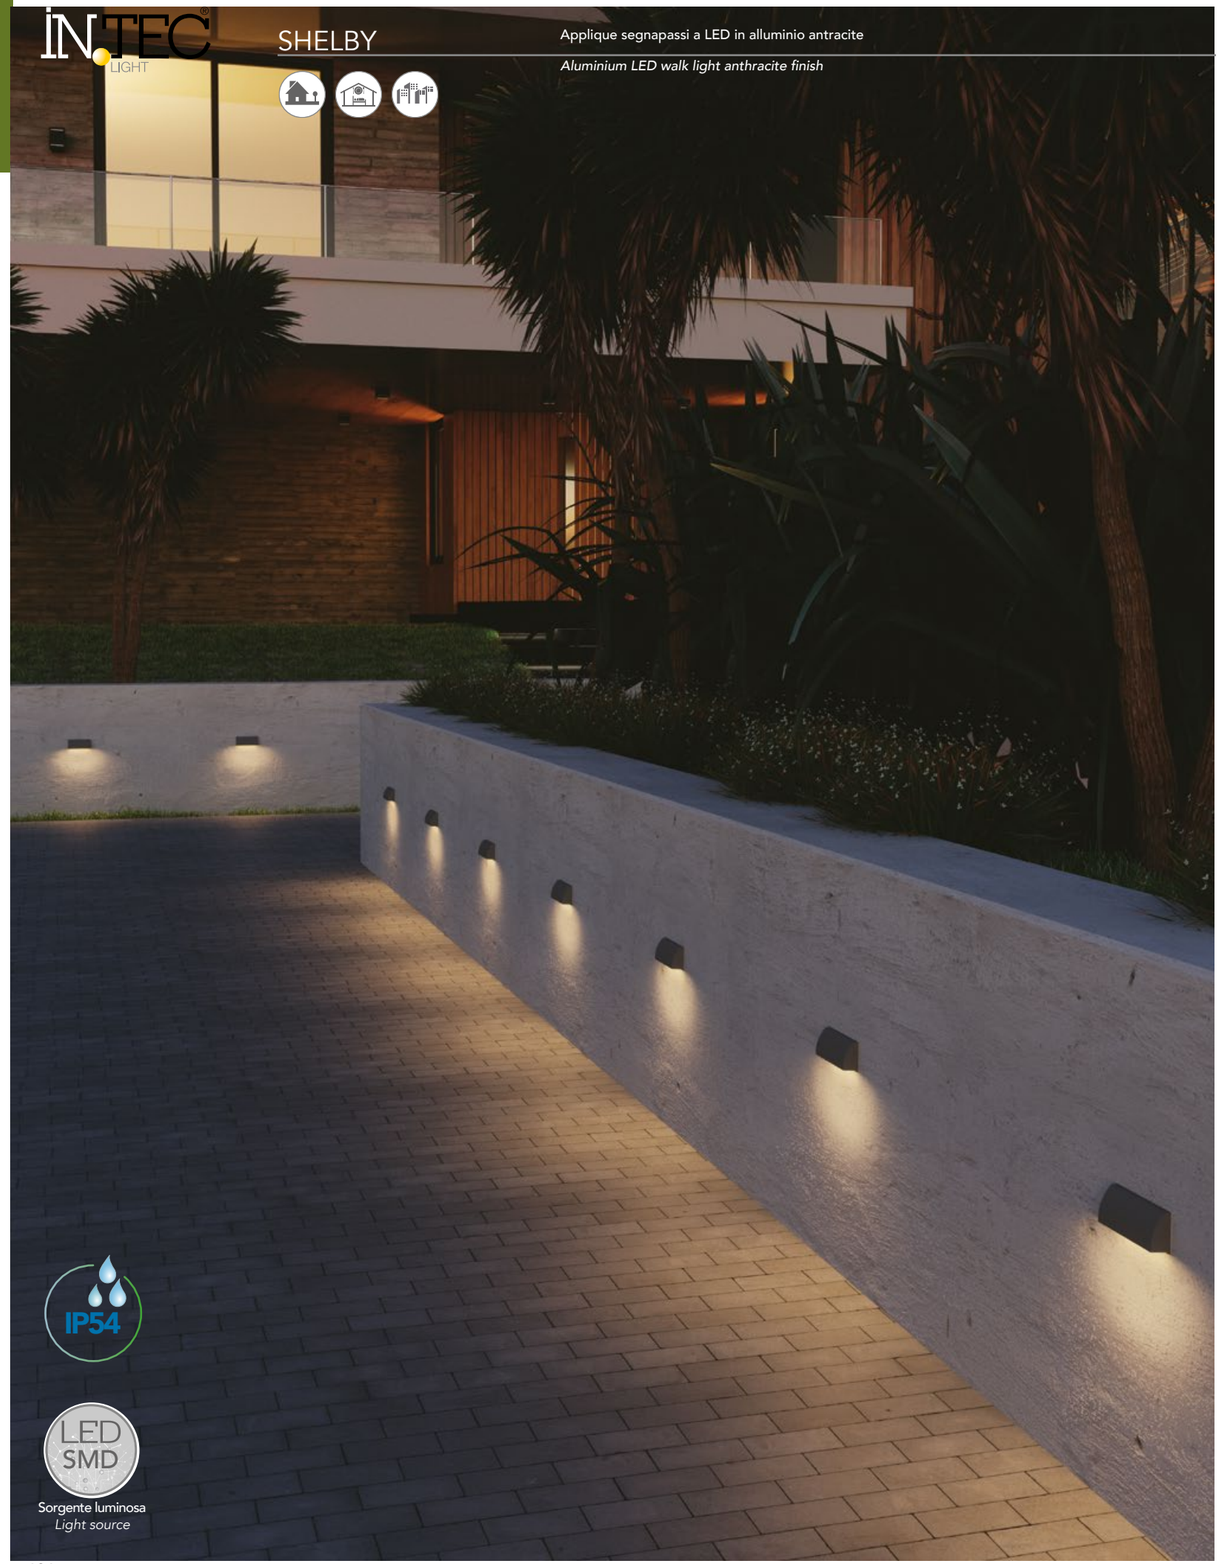

SHELBY

Materiale
Alluminio

Colore
Antracite goffrato

Driver
integrato

Sorgente luminosa
LED SMD 4W - 6W

Temperatura colore
4000K

Angolo di luce
120°

CRI
>80

Grado IK
IK07

Material
Aluminium

Colour
Embossed antracyte

Driver
Built-in

Light source
LED SMD 4W - 6W

Color temperature
4000K

Beam angle
120°

CRI
>80

IK degree
IK07



LED-W-SHELBY-130
8031440361002
4W - 120 LM

Misure - size
dimensioni in mm - size mm





LED-W-SHELBY-170
8031440361019
6W - 240 LM

Misure - size
dimensioni in mm - size mm



KYOTO

Materiale
Alluminio
Colore
Antracite goffrato
Driver
integrato
Sorgente luminosa
LED SMD 2,5W
Temperatura colore
4000K
Angolo di luce
120°

Material
Aluminium
Colour
Embossed antracyte
Driver
Built-in
Light source
LED SMD 2,5W
Color temperature
4000K
Beam angle
120°



LED-KYOTO-AP
8031414883868 — **2,5W - 300 LM**

sensore di movimento
adjustable motion sensor



Pannello solare
Solar panel



Misure - size
dimensioni in mm - size mm





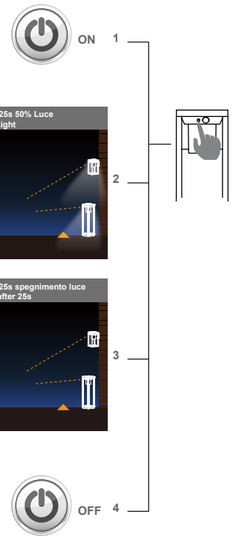



LED-KYOTO-P80
8031414883875 — **2,5W - 300 LM**

sensore di movimento
adjustable motion sensor



Pannello solare
Solar panel



Misure - size
dimensioni in mm - size mm



ENYA

Materiale
Alluminio
Colore
Antracite goffrato
Driver
integrato
Sorgente luminosa
LED SMD 5W
Temperatura colore
4000K
Angolo di luce
120°

Material
Aluminium
Colour
Embossed antracyte
Driver
Built-in
Light source
LED SMD 5W
Color temperature
4000K
Beam angle
120°



LED-ENYA-AP
8031414883844 — **5W - 600 LM**

sensore di movimento
adjustable motion sensor



Pannello solare
Solar panel



Misure - size
dimensioni in mm - size mm





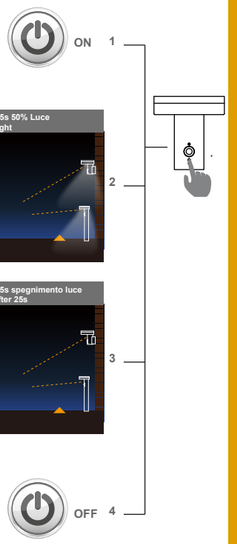



LED-ENYA-P80
8031414883851 — **5W - 600 LM**

sensore di movimento
adjustable motion sensor



Pannello solare
Solar panel



Misure - size
dimensioni in mm - size mm



TED

Applique LED in alluminio antracite con sensore e pannello solare

Aluminum LED wall light antracyte finish with sensor and solar panel

IP54

LED SMD

Sorgente luminosa
Light source

SOLAR





Materiale
Alluminio

Material
Alluminum

Sorgente luminosa
LED SMD 3W

Light source
LED SMD 3W

Batteria
inclusa Li-ion 1200 mAh

Battery
included Li-ion 1200 mAh

Temperatura colore
4000K

Color temperature
4000K

Flusso luminoso
300 Lm

Luminous flux
300 Lm

Angolo di luce
120°

Beam angle
120°

LED-TED-AP
8031414883837
3W - 300 Lm

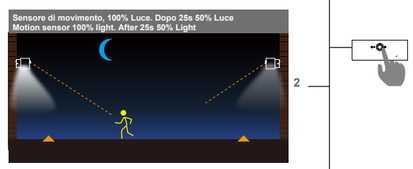

sensore di movimento
adjustable motion sensor



Pannello solare
Solar panel



Misure - size
dimensioni in mm - size mm



ALBERT

Applique LED in alluminio antracite con sensore e pannello solare

Aluminum LED wall light antracyte finish with sensor and solar panel

IP54

LED SMD

Sorgente luminosa
Light source

SOLAR





Materiale
Alluminio

Material
Alluminum

Sorgente luminosa
LED SMD 2,5W

Light source
LED SMD 2,5W

Batteria
inclusa Li-ion 3,7V 1200 mAh

Battery
included Li-ion 3,7V 1200 mAh

Temperatura colore
4000K

Color temperature
4000K

Flusso luminoso
300 Lm

Luminous flux
300 Lm

Angolo di luce
120°

Beam angle
120°

LED-ALBERT-AP
8031414058716
2,5W - 300 Lm

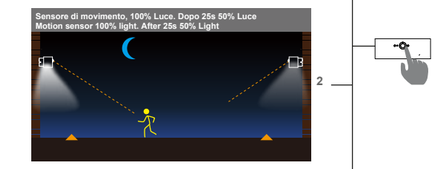

sensore di movimento
adjustable motion sensor



Pannello solare
Solar panel



Misure - size
dimensioni in mm - size mm



COSMO

Proiettore a batteria in termoplastica nero con sensore di movimento regolabile

Flood light with battery power in black thermoplastic with adjustable motion sensor



Materiale
Termoplastica

Sorgente luminosa
LED SMD 1W

Batteria
3x1,2V AAA non incluse

Temperatura colore
6500K

Flusso luminoso
80 Lm

Angolo di luce
120°

Material
Thermoplastic

Light source
LED SMD 1W

Battery
3x1,2V AAA not included

Color temperature
6500K

Luminous flux
80 Lm

Beam angle
120°

LED-COSMO/S **1W -80LM**
8031439841263

sensore di movimento regolabile
adjustable motion sensor



Misure - size
dimensioni in mm - size mm





COSMO

Proiettore in termoplastica nero con pannello solare e sensore di movimento

Black thermoplastic flood light with solar panel and motion sensor



Materiale
Termoplastica

Sorgente luminosa
LED SMD 1W

Batteria
3,6V incluse

Temperatura colore
6500K

Flusso
80Lm

Angolo di luce
120°

Material
Thermoplastic

Light source
LED SMD 1W

Battery
3,6V included

Colour temperature
6500K

Luminous flux
80Lm

Beam angle
120°

LED-COSMO/S-FV **1W -80LM**
8031439821265

sensore di movimento regolabile
adjustable motion sensor



Pannello solare
Solar panel



Misure - size
dimensioni in mm - size mm





ELIOS

Proiettore in alluminio silver con pannello solare e sensore di movimento regolabile

Silver aluminium flood light with solar panel and adjustable motion sensor



IP44

LED SMD

Sorgente luminosa
Light source

SOLAR

Materiale
Alluminio

Colore
Silver

Sorgente luminosa
LED SMD 9W

Batteria
lithium 7,4V 1800 mAh inclusa

Temperatura colore
5000K

Flusso luminoso
620 Lm

Angolo di luce
120°

Material
Aluminium

Colour
Silver

Light source
LED SMD 9W

Battery
lithium 7,4V 1800 mAh included

Colour temperature
5000K

Luminous flux
620 Lm

Beam angle
120°



LED-ELIOS-SOLAR — 9W - 620LM
8031440355124

sensore di movimento regolabile
adjustable motion sensor



Pannello solare
Solar panel



Misure - size
dimensioni in mm - size mm





EOS

Proiettore in termoplastica silver con pannello solare, sensore di movimento e crepuscolare.

Silver thermoplastic flood light with solar panel , motion and crepuscolar sensor

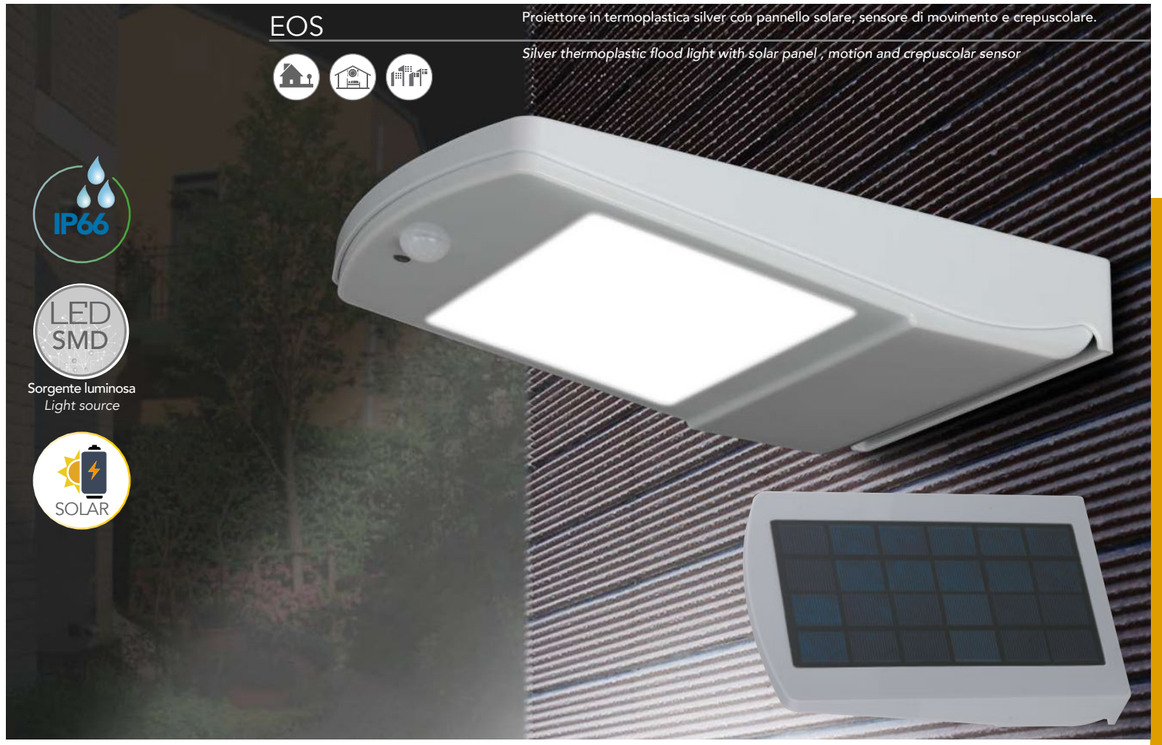

IP66

LED SMD

Sorgente luminosa
Light source

SOLAR

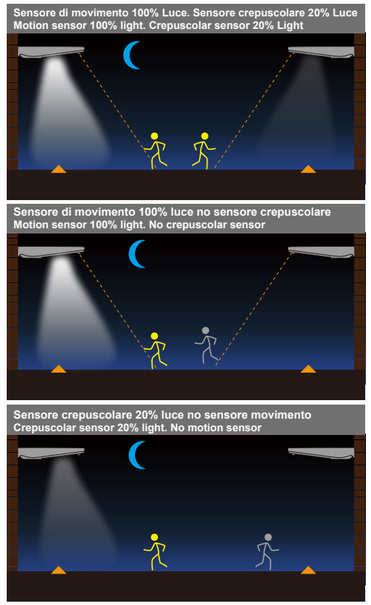



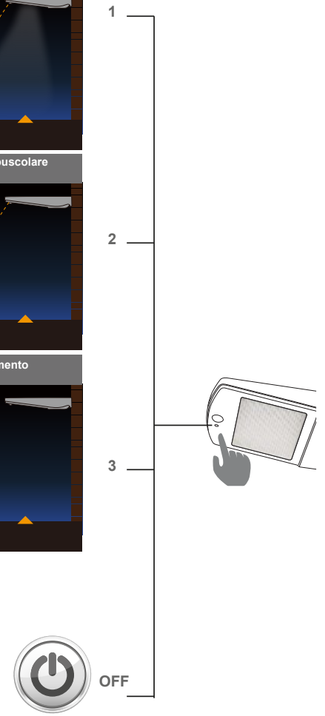

Materiale
Termoplastica

Colore
Silver

Sorgente luminosa
LED SMD 4W

Batteria
lithium 3,9V 4400mAh inclusa

Temperatura colore
4000K

Flusso luminoso
450 Lm

Angolo di luce
100°

Material
Thermoplastic

Colour
Silver

Light source
LED SMD 4W

Battery
lithium 3,9V 4400mAh included

Colour temperature
4000K

Luminous flux
450 Lm

Beam angle
100°

LED-EOS-SOLAR — 4W - 450LM
8031414862740

sensore di movimento regolabile distanza Max 6m 120°
adjustable motion sensor max distance 6m 120°

Misure - size
dimensioni in mm - size mm



OPEN

Applique LED in termoplastica bianco con sensore e pannello solare

Thermoplastic LED wall light white finish with sensor and solar panel

IP54

LED SMD

Sorgente luminosa
Light source

SOLAR





Materiale	**Material**
Termoplastica	Thermoplastic
Sorgente luminosa	**Light source**
LED SMD 3W 2835	LED SMD 3W 2835
Batteria	**Battery**
inclusa Li-ion 1200 mAh	included Li-ion 1200 mAh
Temperatura colore	**Color temperature**
4000K	4000K
Flusso luminoso	**Luminous flux**
300Lm	300Lm
Angolo di luce	**Beam angle**
120°	120°



LED-OPEN-AP **3W - 300 Lm**
8031414870752

sensore di movimento regolabile
accensione con 15 lux
adjustable motion sensor
switch on 15 lux



Pannello solare
Solar panel



Misure - size
dimensioni in mm - size mm



ON/OFF



Base easy-up che permette il duplice utilizzo del faro come lampada da muro e lampada portatile
Easy-up base for double use of the lamp, as wall and portable lamp

SKYP

Applique LED in termoplastica bianco con sensore e pannello solare

Thermoplastic LED wall light white finish with sensor and solar panel

IP54

LED SMD

Sorgente luminosa
Light source

SOLAR





Materiale	**Material**
Termoplastica	Thermoplastic
Sorgente luminosa	**Light source**
LED SMD 3W 2835	LED SMD 3W 2835
Batteria	**Battery**
inclusa Li-ion 3,7V 1200 mAh	included Li-ion 3,7V 1200 mAh
Temperatura colore	**Color temperature**
4000K	4000K
Flusso luminoso	**Luminous flux**
130Lm	130Lm
Angolo di luce	**Beam angle**
120°	120°



LED-SKYP-AP **3W - 130 Lm**
8031414870783

sensore di movimento regolabile
accensione con 15 lux
adjustable motion sensor
switch on 15 lux



Pannello solare
Solar panel



Misure - size
dimensioni in mm - size mm



ON/OFF



Base easy-up che permette il duplice utilizzo del faro come lampada da muro e lampada portatile
Easy-up base for double use of the lamp, as wall and portable lamp

ARGO

Proiettore in alluminio antracite con diffusore in acrilico con pannello solare , sensore di movimento e crepuscolare

Anthracite aluminium flood light with acrylic diffuser, solar panel , motion and crepuscolar sensor

IP54

LED SMD

Sorgente luminosa
Light source

SOLAR



Materiale
Alluminio e acrilico

Colore
Antracite

Sorgente luminosa
LED SMD 1,8W

Batteria
lithium 3,7V 2200 mAh inclusa

Temperatura colore
4000K

Flusso luminoso
130 Lm

Angolo di luce
120°

Material
Aluminium and acrylic

Colour
Anthracite

Light source
LED SMD 1,8W

Battery
lithium 3,7V 2200 mAh included

Colour temperature
4000K

Luminous flux
130 Lm

Beam angle
120°

LED-ARGO-SOLAR **1,8W - 130 Lm**
8031414865345

sensore di movimento
motion sensor



sensore crepuscolare
crepuscolar sensor



Pannello solare
Solar panel



Misure - size
dimensioni in mm - size mm





SHIVA

Proiettore in termoplastica antracite con pannello solare e sensore di movimento

Anthracite thermoplastic flood light with solar panel and motion sensor



IP54

LED SMD

Sorgente luminosa
Light source

SOLAR

Materiale
Termoplastica

Colore
Antracite

Sorgente luminosa
LED COB 2x1,5W

Batteria
inclusa Li-ion 3,7V 1200 mAh
Non inclusa x3 1,2V AAA

Temperatura colore
4000K

Punti luce
2

Flusso luminoso
230 Lm

Angolo di luce
120°

Material
Thermoplastic

Colour
Anthracite

Light source
LED COB 2x1,5W

Battery
included Li-ion 3,7V 1200 mAh
Not included x3 1,2V AAA

Colour temperature
4000K

Number of light sources
2

Luminous flux
230 Lm

Beam angle
120°

LED-SHIVA-SOLAR — 2X1,5W - 230 Lm
8031414870769

sensore di movimento
accensione <15 lux
motion sensor
switch on <15 lux



Pannello solare
Solar panel



Accessori inclusi
Accessories included

Cavo 1,9 metri
1,9 meters cable

Misure - size
dimensioni in mm - size mm







Doppia funzione : auto-ricarica con pannello solare o alimentazione con pile AAA (non incluse)
Double function: auto recharge by solar panel or power by AAA battery (not included)

Base easy-up che permette il duplice utilizzo del faro come lampada da muro e lampada portatile
Easy-up base for double use of the lamp, as wall and portable lamp

ULYSSE

Proiettore in termoplastica antracite con pannello solare e sensore di movimento regolabile

Anthracite thermoplastic flood light with solar panel and adjustable motion sensor



IP54

LED SMD

Sorgente luminosa
Light source

SOLAR



doppio sistema di montaggio
double mounting system

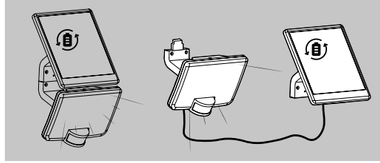

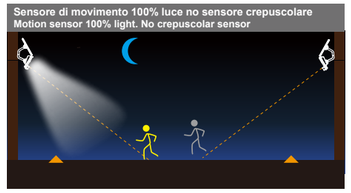

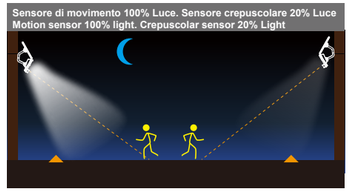

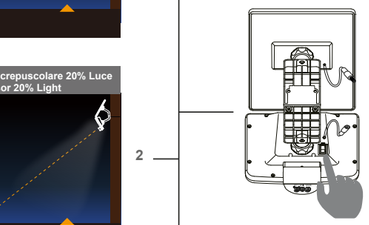

Materiale
Termoplastica

Colore
Antracite

Sorgente luminosa
LED SMD 10W

Batteria
lithium 3,7V 3000 mAh inclusa

Temperatura colore
4000K

Flusso luminoso
1000 Lm

Angolo di luce
120°

Material
Thermoplastic

Colour
Anthracite

Light source
LED SMD 10W

Battery
lithium 3,7V 3000 mAh included

Colour temperature
4000K

Luminous flux
1000 Lm

Beam angle
120°

LED-ULYSSE-SOLAR — 10W - 1000 Lm
8031414882588

sensore di movimento e crepuscolare regolabili
adjustable motion and crepuscolar sensor



Pannello solare
Solar panel



Misure - size
dimensioni in mm - size mm





ATHOS

Proiettore in alluminio silver con pannello solare

Silver aluminium flood light with solar panel

IP65

LED SMD

Sorgente luminosa
Light source

SOLAR

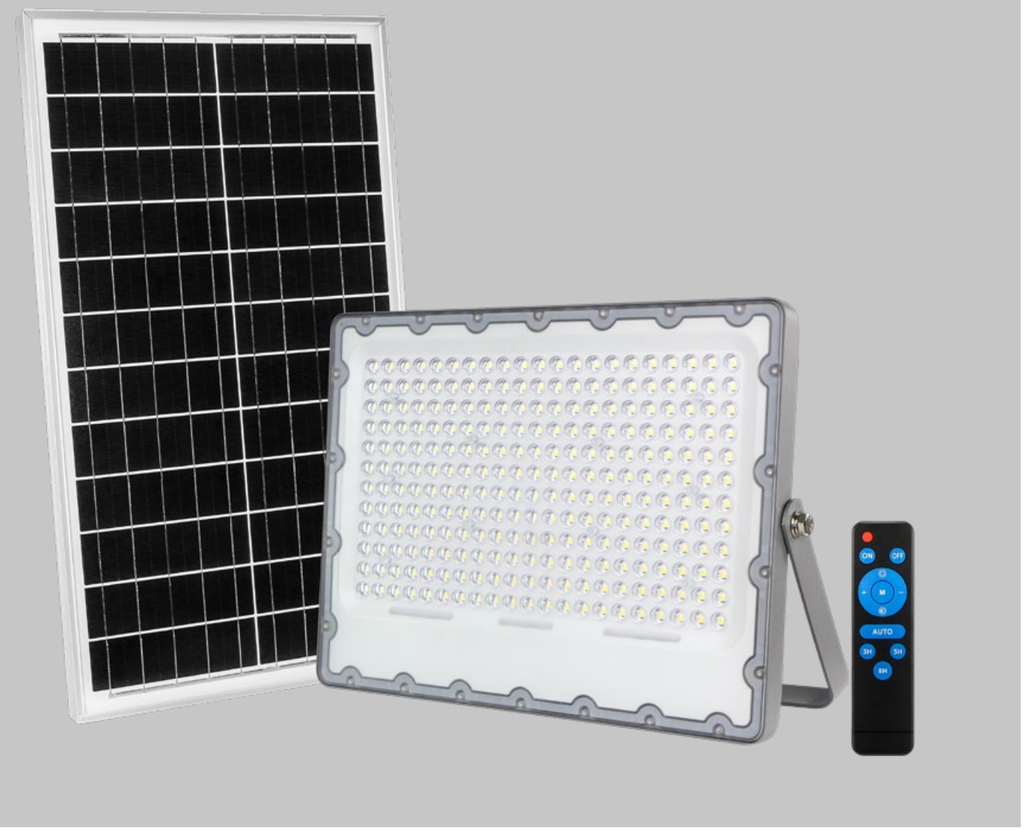



Materiale	**Material**
Alluminio	Aluminium
Colore	**Colour**
Silver	*Silver*
Driver	**Driver**
integrato	Built-in
Sorgente luminosa	**Light source**
LED SMD 100W - 200W - 300W	LED SMD 100W - 200W - 300W
Temperatura colore	**Color temperature**
4000K	4000K
Angolo di luce	**Beam angle**
80°	80°
CRI	**CRI**
>80	>80
Grado IK	**IK degree**
IK07	IK07

LED-ATHOS-SOL100

8031414884247

100W - 1400 LM

Accessori inclusi
Accessories included

Telecomando
Remote control



Pannello solare
Solar panel



Misure - size
dimensioni in mm - size mm





LED-ATHOS-SOL200

8031414884254

200W - 2900 LM

Accessori inclusi
Accessories included

Telecomando
Remote control



Pannello solare
Solar panel



Misure - size
dimensioni in mm - size mm





LED-ATHOS-SOL300

8031414884261

300W - 4800 LM

Accessori inclusi
Accessories included

Telecomando
Remote control



Pannello solare
Solar panel



Misure - size
dimensioni in mm - size mm





VYSOR

Proiettore con telecamera di sicurezza colore antracite con funzione smart Wi-Fi, compatibili con dispositivi iOS, android e VOICE CONTROL

Flood light with security camera, anthracite, smart Wi-Fi, compatible with iOS devices, android and VOICE CONTROL devices

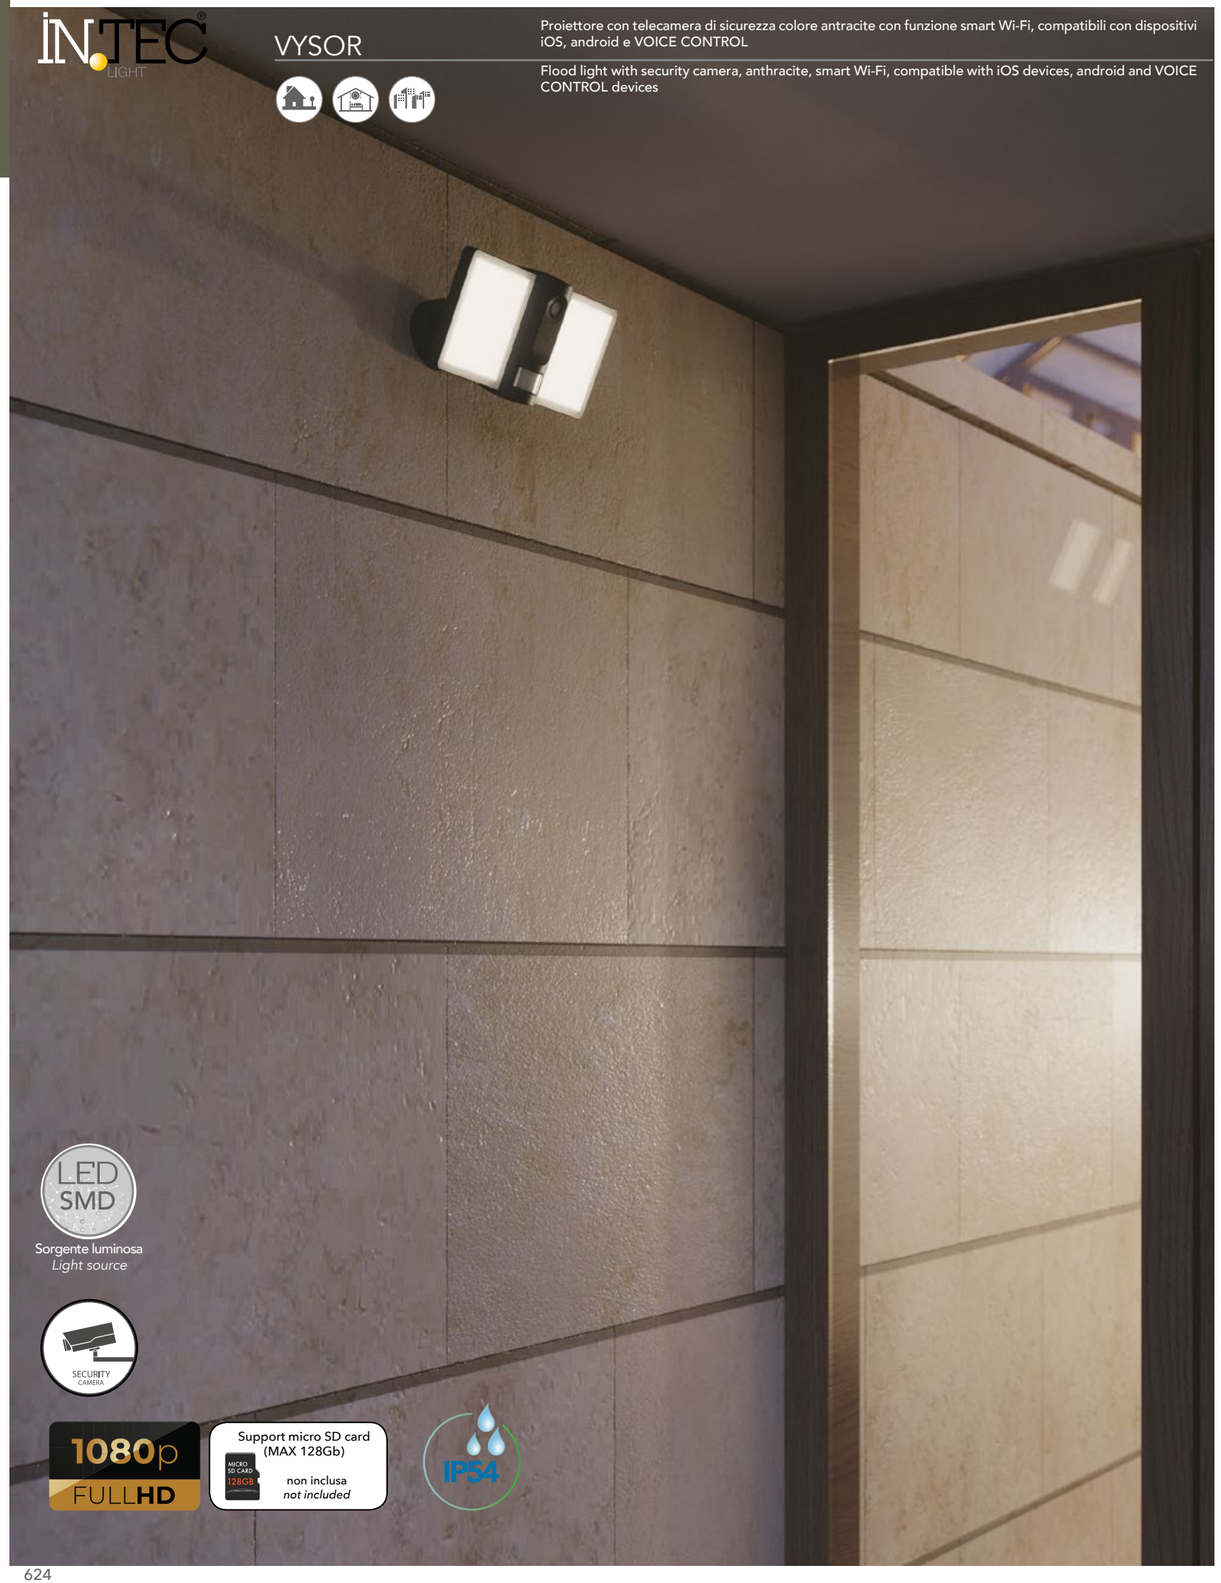

SMART INTEC
Wi-Fi

CONTROL SYSTEM
EASY INSTALLATION



SMART INTEC

Powered by tuya Intelligence Inside

Smart Life

COMPATIBLE WITH
AMAZON ECHO SHOW
GOOGLE CHROME CAST

Materiale
Alluminio+PC

Colore
antracite

Driver
integrato

Sorgente luminosa
LED SMD 20W

Temperatura colore
4000K

Flusso luminoso
1400 Lm

Angolo di luce
120°

CRI
>85

Grado IK
IK08

Material
Aluminium+PC

Colour
anthracite

Driver
Built-in

Light source
LED SMD 20W

Color temperature
4000K

Luminous flux
1400 Lm

Beam angle
120°

CRI
>85

IK degree
IK08



LED-VYSOR-SECURITY
8031414871810 **20W**

Misure - size
dimensioni in mm - size mm





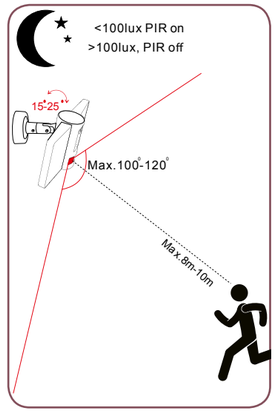

Tipo di sensore video - Video sensor type	1/2,9" CMOS
Pixel	2.0 Mega
Illuminazione minima - Min illuminance	Color 0.10lux @F2.0, black and white 0.01lux @F2.0
Angolo vista camera - Camera view angle	135°
Otturatore - Shutter	1/25-1/100,000 per second
Infrarossi - IR	High power LED with ICR
WDR	Digital WDR
Video compression standard	H.264
Video compression standard	32Kbps - 2Mbps
Risoluzione video - Max picture size	1920x1080
Frequenza fotogrammi - Frame rate	1-20 per second
Audio	Full duplex audio (doppio sistema di comunicazione)
Memoria - Storage	Support SD card (MAX 128Gb) Cloud storage NVR
Impostazione immagine - Image setting	Support HD/SD; support mirror
Reset	Support
Controllo della luce - Lighting control	Support manual, sensor, plan switch light (gestione accensioni)
Interfaccia di protocollo - Interface protocol	Private
Comunicazione di protocollo - Communication protocol	TCP/IP, HTTP, DHCP, DNS, RTSP
Funzioni generali - General function	Dual stream, password protection
Wi-Fi	IEEE802.11b/g/n
PIR	Support PIR and motion detection

BANNER



GU10
Attacco sorgente
Light source

IP55

Materiale
Metallo

Material
Metal

Colore finitura
Nero satinato

Finiture colour
Satin black

Sorgente luminosa
1xGU10

Light source
1xGU10

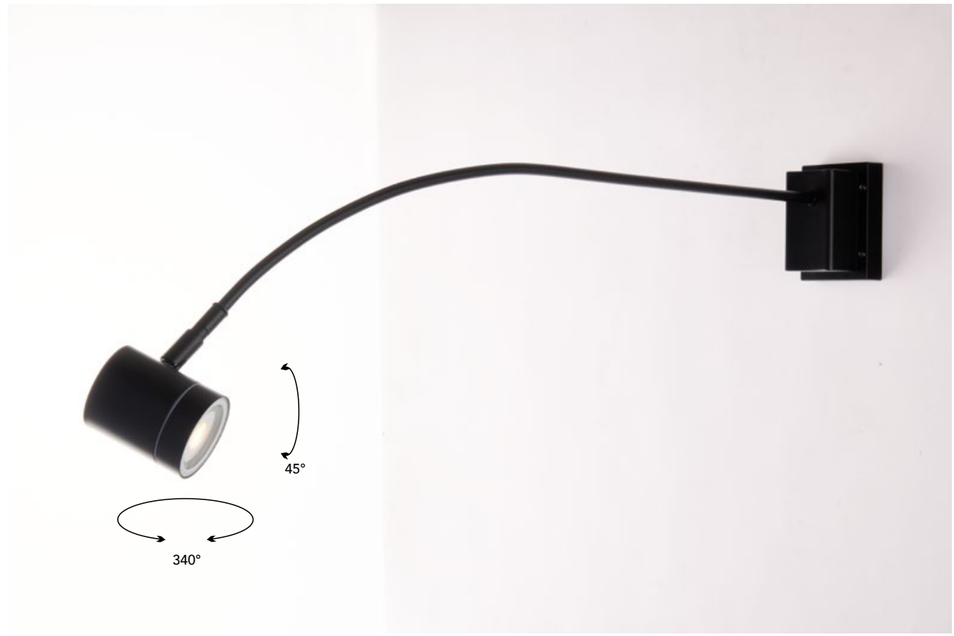

I-BANNER-AP
8031414883004

1XGU10 MAX 35W

Lampadina non inclusa
Light bulb not included

Misure - size
dimensioni in mm - size mm

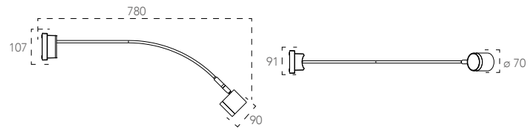

SAT

Proiettore in termoplastica LED integrato finitura antracite con diffusore in acrilico con sensore di movimento e crepuscolare regolabile

Built-in LED thermoplastic flood lamp anthracite finish with acrylic diffuser with adjustable night and motion sensor



IP54

LED SMD

Sorgente luminosa
Light source

Materiale Termoplastica	**Material** Thermoplastic
Colore antracite	**Colour** anthracite
Sorgente luminosa LED SMD 10W - 20W	**Light source** LED SMD 10W - 20W
Driver incluso	**Driver** included
Temperatura colore 4000K	**Colour temperature** 4000K
Flusso luminoso 800 Lm - 1600 LM	**Luminous flux** 800 Lm - 1600 LM
Angolo di luce 120°	**Beam angle** 120°
CRI >80	**CRI** >80

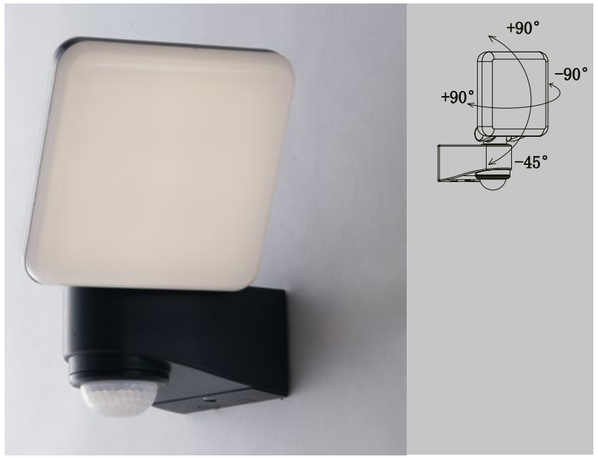

LED-SAT-10
8031414868261
10W - 800 Lm

Accessori inclusi
Accessories included
sensore di movimento regolabile
adjustable motion sensor





Misure - size
dimensioni in mm - size mm



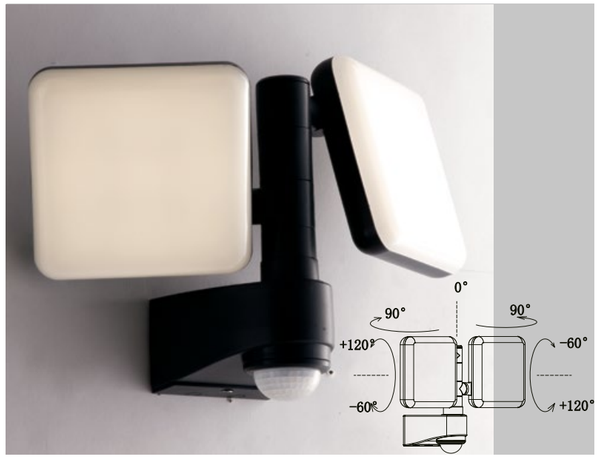

LED-SAT-20
8031414868278
2X10W - 1600 Lm

Accessori inclusi
Accessories included
sensore di movimento regolabile
adjustable motion sensor





Misure - size
dimensioni in mm - size mm

IP65

LED SMD

Sorgente luminosa
Light source

KRONOS

Proiettore in alluminio LED integrato finitura bianco goffrato

Built-in LED aluminium flood lamp embossed white finish



Materiale
Alluminio diffusore acrilico

Colore
Bianco goffrato

Sorgente luminosa
LED SMD 10W - 20W - 50W - 100W

Flusso luminoso
800 Lm - 1600 Lm - 4000 Lm - 8000 Lm

Driver
integrato

Temperatura colore
4000K

Angolo di luce
120°

CRI
>80

Material
Aluminium acrylic diffuser

Colour
Embossed white

Light source
LED SMD 10W - 20W - 50W - 100W

Luminous flux
800 Lm - 1600 Lm - 4000 Lm - 8000 Lm

Driver
Built-in

Colour temperature
4000K

Beam angle
120°

CRI
>80



Fotometria del Prodotto
Photometric curve of the product



LED-KRONOS/10W

LED-KRONOS/10W **10W - 800 LM**
8031436031230

Misure - size
dimensioni in mm - size mm





Fotometria del Prodotto
Photometric curve of the product



LED-KRONOS/20W

LED-KRONOS/20W **20W - 1600 LM**
8031436001233

Misure - size
dimensioni in mm - size mm





Fotometria del Prodotto
Photometric curve of the product



LED-KRONOS/50W

LED-KRONOS/50W **50W - 4000 LM** PF 0,90
8031436011232

Misure - size
dimensioni in mm - size mm





Fotometria del Prodotto
Photometric curve of the product



LED-KRONOS/100W

LED-KRONOS/100W **100W - 8000 LM** PF 0,90
8031414018932

Misure - size
dimensioni in mm - size mm



ELIOS

Proiettore in alluminio LED integrato finitura silver

Built-in LED aluminium flood lamp embossed silver finish

IP65

LED SMD

Sorgente luminosa
Light source



Materiale
Alluminio diffusore acrilico

Material
Aluminium acrylic diffuser

Colore
Silver goffrato

Colour
Embossed silver

Sorgente luminosa
LED SMD 10W - 20W - 30W - 50W - 100W

Light source
LED SMD 10W - 20W - 30W - 50W - 100W

Flusso luminoso
800 Lm - 1600 Lm - 2400 Lm
4000 Lm - 8000 Lm

Luminous flux
800 Lm - 1600 Lm - 2400 Lm
4000 Lm - 8000 Lm

Driver
integrato

Driver
Built-in

Temperatura colore
4000K

Colour temperature
4000K

Angolo di luce
120°

Beam angle
120°

CRI
>80

CRI
>80



Fotometria del Prodotto
Photometric curve of the product



LED-ELIOS/10W
8031431291189
10W - 800 LM

Misure - size
dimensioni in mm - size mm





Fotometria del Prodotto
Photometric curve of the product



LED-ELIOS/20W

LED-ELIOS/20W
8031431281180
20W - 1600 LM

Misure - size
dimensioni in mm - size mm





Fotometria del Prodotto
Photometric curve of the product



LED-ELIOS/30W

LED-ELIOS/30W
8031437391241
30W - 2400 LM
PF 0,90

Misure - size
dimensioni in mm - size mm





Fotometria del Prodotto
Photometric curve of the product



LED-ELIOS/50W

LED-ELIOS/50W
8031432091191
50W - 4000 LM
PF 0,90

Misure - size
dimensioni in mm - size mm





Fotometria del Prodotto
Photometric curve of the product



LED-ELIOS/100W

LED-ELIOS/100W
8031440357159
100W - 8000 LM
PF 0,90

Misure - size
dimensioni in mm - size mm



ELIOS

Proiettore

Materiale
Alluminio

Colore
Antracite

Sorgente luminosa
LED SMD 10W - 30W

Flusso luminoso
800 Lm - 2400 Lm

Driver
Integrato

Temperatura colore
4000K

Angolo di luce
120°

CRI
>80

Flood lamp

Material
Aluminium

Colour
Anthracite

Light source
LED SMD 10W - 30W

Luminous flux
800 Lm - 2400 Lm

Driver
Built-in

Colour temperature
4000K

Beam angle
120°

CRI
>80





LED-ELIOS-S/10W
8031437381242
10W - 800 Lm

Accessori inclusi
Accessories included
sensore di movimento regolabile
adjustable motion sensor



Misure - size
dimensioni in mm - size mm



Fotometria del Prodotto
Photometric curve of the product



LED-ELIOS-S/10W



LED-ELIOS-S/30W
8031436391235
30W - 2400 Lm

Accessori inclusi
Accessories included
sensore di movimento regolabile
adjustable motion sensor



Misure - size
dimensioni in mm - size mm



Fotometria del Prodotto
Photometric curve of the product



LED-ELIOS-S/30W

ELIOS

Proiettore LED portatile

LED portable flood light

IP65

LED SMD
Sorgente luminosa
Light source



Materiale
alluminio

Colore
Nero

Sorgente luminosa
LED SMD 20W

Flusso luminoso
1600 Lm

Driver
integrato

Temperatura colore
4000K

Angolo di luce
120°

CRI
>80

Material
Aluminium

Colour
Black

Light source
LED SMD 20W

Luminous flux
1600 Lm

Driver
Built-in

Colour temperature
4000K

Beam angle
120°

CRI
>80



Fotometria del Prodotto
Photometric curve of the product



LED-ELIOS-P/20W

LED-ELIOS-P/20W
8031436381236
20W - 1600 LM

Accessori inclusi
Accessories included

Cavo 1,6 metri c/spina
1,6 meter cable with plug



Misure - size
dimensioni in mm - size mm



ATHOS

Proiettore a led integrato in allumino silver e diffusore satinato

Built-in LED aluminium flood lamp silvefr finish with satin diffuser

IP65

LED SMD

Sorgente luminosa
Light source



Materiale
Alluminio

Colore
Silver

Sorgente luminosa
LED SMD 100W - 200W - 300W

Flusso luminoso
10000Lm - 20000 Lm - 30000 Lm

Driver
Integrato

Temperatura colore
4000K - 6000K

Angolo di luce
90°

CRI
>80

Grado IK
IK10

Material
Aluminium

Colour
Silver

Light source
LED SMD 100W - 200W - 300W

Luminous flux
10000Lm - 20000 Lm - 30000 Lm

Driver
Built-in

Colour temperature
4000K - 6000K

Beam angle
90°

CRI
>80

IK degree
IK10



Fotometria del Prodotto
Photometric curve of the product



LED-ATHOS-100

LED-ATHOS-100 8031414884186	○	100W - 10000 LM	PF 0,90
LED-ATHOS-100F 8031414884193	●	100W - 10000 LM	PF 0,90

Misure - size
dimensioni in mm - size mm





Fotometria del Prodotto
Photometric curve of the product



LED-ATHOS-150

LED-ATHOS-150 8031414884209	○	200W - 20000 LM	PF 0,90
LED-ATHOS-150F 8031414884216	●	200W - 20000 LM	PF 0,90

Misure - size
dimensioni in mm - size mm





Fotometria del Prodotto
Photometric curve of the product



LED-ATHOS-200

LED-ATHOS-200 8031414884223	○	300W - 30000 LM	PF 0,90
LED-ATHOS-200F 8031414884230	●	300W - 30000 LM	PF 0,90

Misure - size
dimensioni in mm - size mm



PLUTONE

Proiettore a led integrato in allumino antracite e diffusore in acrilico bianco

Built-in LED aluminium flood lamp antharacyte finish with acrylic white diffuser

IP65

LED SMD

Sorgente luminosa
Light source





Materiale
Alluminio - diffusore in acrilico

Colore
Antracite

Sorgente luminosa
LED SMD 10W - 20W - 30W - 50W

Flusso luminoso
800 Lm - 1600Lm - 2400 Lm - 4000 Lm

Driver
Integrato

Temperatura colore
3000K - 4000K - 6500K

Angolo di luce
120°

CRI
>80

Material
Aluminium - acrylic diffuser

Colour
Anthracite

Light source
LED SMD 10W - 20W - 30W - 50W

Luminous flux
800 Lm - 1600Lm - 2400 Lm - 4000 Lm

Driver
Built-in

Colour temperature
3000K - 4000K - 6500K

Beam angle
120°

CRI
>80

CE EMC



Fotometria del Prodotto
Photometric curve of the product



LED-PLUTONE-10

LED-PLUTONE-10 8031414875887		10W - 800 LM

Misure - size
dimensioni in mm - size mm





Fotometria del Prodotto
Photometric curve of the product



LED-PLUTONE-20

LED-PLUTONE-20C 8031414876099		20W - 1600 LM
LED-PLUTONE-20 8031414875894		20W - 1600 LM
LED-PLUTONE-20F 8031414876112		20W - 1600 LM

Misure - size
dimensioni in mm - size mm





Fotometria del Prodotto
Photometric curve of the product



LED-PLUTONE-30

LED-PLUTONE-30 8031414875900	30W - 2400 LM	PF 0,90

Misure - size
dimensioni in mm - size mm





Fotometria del Prodotto
Photometric curve of the product



LED-PLUTONE-50

LED-PLUTONE-50C 8031414879144	50W - 4000 LM	PF 0,90
LED-PLUTONE-50 8031414875917	50W - 4000 LM	PF 0,90
LED-PLUTONE-50F 8031414879120	50W - 4000 LM	PF 0,90

Misure - size
dimensioni in mm - size mm



PLUTONE

Proiettore

Materiale
Alluminio - diffusore in acrilico
Colore
Antracite
Sorgente luminosa
LED SMD 20W - 50W
Flusso luminoso
1600 Lm - 4000 Lm
Driver
integrato
Temperatura colore
4000K
Angolo di luce
120°
CRI
>80

Flood lamp

Materiale
Aluminium - acrylic diffuser
Colour
Anthracite
Sorgente luminosa
LED SMD 20W - 50W
Luminous flux
800 Lm - 2400 Lm
Driver
Built-in
Colour temperature
4000K
Beam angle
120°
CRI
>80





LED-PLUTONE-S20
8031414875924
20W - 1600 Lm

Accessori inclusi
Accessories included
sensore di movimento regolabile
adjustable motion sensor



Misure - size
dimensioni in mm - size mm



Fotometria del Prodotto
Photometric curve of the product



LED-PLUTONE-S20



LED-PLUTONE-S50
8031414875931
50W - 4000 Lm

Accessori inclusi
Accessories included
sensore di movimento regolabile
adjustable motion sensor



Misure - size
dimensioni in mm - size mm



Fotometria del Prodotto
Photometric curve of the product



LED-PLUTONE-S50

PLUTONE

Proiettore LED portatile

LED portable flood light



IP65

LED SMD
Sorgente luminosa
Light source

Materiale
Alluminio diffusore in acrilico
Colore
Antracite
Sorgente luminosa
LED SMD 20W
Flusso luminoso
1600 Lm
Driver
integrato
Temperatura colore
4000K
Angolo di luce
120°
CRI
>80

Material
Aluminium with acrylic diffuser
Colour
Anthracite
Light source
LED SMD 20W
Luminous flux
1600 Lm
Driver
Built-in
Colour temperature
4000K
Beam angle
120°
CRI
>80



Fotometria del Prodotto
Photometric curve of the product



LED-PLUTONE-P20

LED-PLUTONE-P20
8031414875948
20W - 1600 LM

Accessori inclusi
Accessories included

Cavo 1,6 metri c/spina
1,6 meter cable with plug

IP44

Misure - size
dimensioni in mm - size mm



HARALD

Proiettore a led integrato in allumino grigio con funzione Bluetooth Sig mesh, compatibili con dispositivi iOS, android e VOICE CONTROL

Built-in LED aluminium flood lamp grey finish with Bluetooth Sig mesh function, compatible with iOS, android and VOICE CONTROL devices



IP65

LED SMD

Sorgente luminosa
Light source

SMART INTEC Bluetooth Sig mesh

Powered by tuya Intelligence Inside

Proiettore	Flood lamp
Materiale Alluminio	**Material** Aluminium
Colore Grigio	**Colour** Grey
Sorgente luminosa LED SMD 30W - 50W	**Light source** LED SMD 30W - 50W
Driver Integrato	**Driver** Built-in
Temperatura colore RGB + CCT	**Color temperature** RGB + CCT
Punti luce 1	**Number of light sources** 1
Flusso luminoso 3300 LM 5200 LM	**Luminous Flux** 3300 LM 5200 LM
Angolo di luce 120°	**Beam angle** 120°
CRI >70	**CRI** >70
Grado IK IK06	**IK degree** IK06

CE EMC



Fotometria del Prodotto

Photometric curve of the product



LED-HARALD-BT30

LED-HARALD-BT30 8031414878956	30W	3300 Lm	PF 0,90

Misure - size
dimensioni in mm - size mm





Fotometria del Prodotto

Photometric curve of the product



LED-HARALD-BT50

LED-HARALD-BT50 8031414878963	50W	5200 Lm	PF 0,90

Misure - size
dimensioni in mm - size mm



TAURUS

Proiettore a led integrato in allumino nero diffusore in vetro temperato

Built-in LED aluminium flood lamp black aluminium body with tempered glass diffuser



Sorgente luminosa
Light source



Materiale
Alluminio

Colore
Nero

Sorgente luminosa
LED SMD

Flusso luminoso
8400 Lm - 12000 Lm - 18000 Lm - 24000 Lm

Driver
integrato

Temperatura colore
6500K - 4000K

Durata e on/off
50.000 h >25.000 on/off

Angolo di luce
110°

CRI
>80

Grado IK
IK07

Material
Aluminium

Colour
Black

Light source
LED SMD

Luminous flux
8400 Lm - 12000 Lm - 18000 Lm - 24000 Lm

Driver
Built-in

Colour temperature
6500K - 4000K

Lifetime and on/off
50.000 h >25.000 on/off

Beam angle
110°

CRI
>80

IK degree
IK07



Fotometria del Prodotto
Photometric curve of the product



LED-TAURUS-70

LED-TAURUS-70 8031414875757	70W	○	8400 LM
LED-TAURUS-70F 8031414876662	70W	●	8400 LM

Misure - size
dimensioni in mm - size mm





Fotometria del Prodotto
Photometric curve of the product



LED-TAURUS-100

LED-TAURUS-100 8031414875764	100W	○	12000 LM
LED-TAURUS-100F 8031414876631	100W	●	12000 LM

Misure - size
dimensioni in mm - size mm





Fotometria del Prodotto
Photometric curve of the product



LED-TAURUS-150

LED-TAURUS-150 8031414875771	150W	○	18000 LM
LED-TAURUS-150F 8031414876648	150W	●	18000 LM

Misure - size
dimensioni in mm - size mm





Fotometria del Prodotto
Photometric curve of the product



LED-TAURUS-200

LED-TAURUS-200 8031414875788	200W	○	24000 LM
LED-TAURUS-200F 8031414876655	200W	●	24000 LM

Misure - size
dimensioni in mm - size mm







I-FRAME-L-GR
8031440361880

Staffa fissaggio angolare colore grigio
Metal corner wall arms gray color



I-FRAME-L-BCO
8031440364577

Staffa fissaggio angolare colore bianco
Metal corner wall arms white color





I-FRAME-V-GR
8031440364584

Staffa V movibile 30° fissaggio parete colore grigio
Metal wall arms orientable 30° gray color



I-FRAME-V-BCO
8031440364553

Staffa V movibile 30° fissaggio parete colore bianco
Metal wall arms orientable 30° white color



I-SPIKE-ANT
8031414877973

Picchetto alluminio antracite
Anthracite aluminum spike





I-TRIPOD
8031440361729

Accessori per proiettori
Sistema di fissaggio singolo e doppio
Flood light accessories
Single and double connection system



Cavo 2,8 metri c/spina
2,8 meters cable woth plug

IP44

SENSORI / SENSORS

SENSORI ADATTABILI A QUALSIASI PRODOTTO ILLUMINOTECNICO
SENSORS COMPATIBLE FOR ANY LIGHTING PRODUCTS



IP44

I-SENSORE-360
8031435901237

Sensore PIR 230V max 1600W 360°
distanza massima 5m.
time 10 sec. - 4 min.
lux 2 - 2000
PIR sensor 230V max 1600W 360°
max 5m. time 10 sec. - 4 min.
lux 2 - 2000





IP44

I-SENSORE-130
8031434401219

Sensore PIR 230V max 1000W 130°
distanza massima 12m.
time 10 sec. - 4 min.
lux 2 - 2000 base accessoria angolare
PIR sensor 230V max 1000W 130°
max 12m. time 10 sec. - 4 min.
lux 2 - 2000 corner accessory base





IP44

I-SENSORE-180
8031434411218

Sensore PIR 230V max 1000W 180°
distanza massima 12m.
time 10 sec. - 4 min.
lux 2 - 2000
PIR sensor 230V max 1000W 180°
max 12m. time 10 sec. - 4 min.
lux 2 - 2000



GIOVE

Proiettore LED integrato struttura in alluminio pressofuso e diffusore in vetro temperato

Built-in LED floor light die-cast aluminium body and tempered glass diffuser

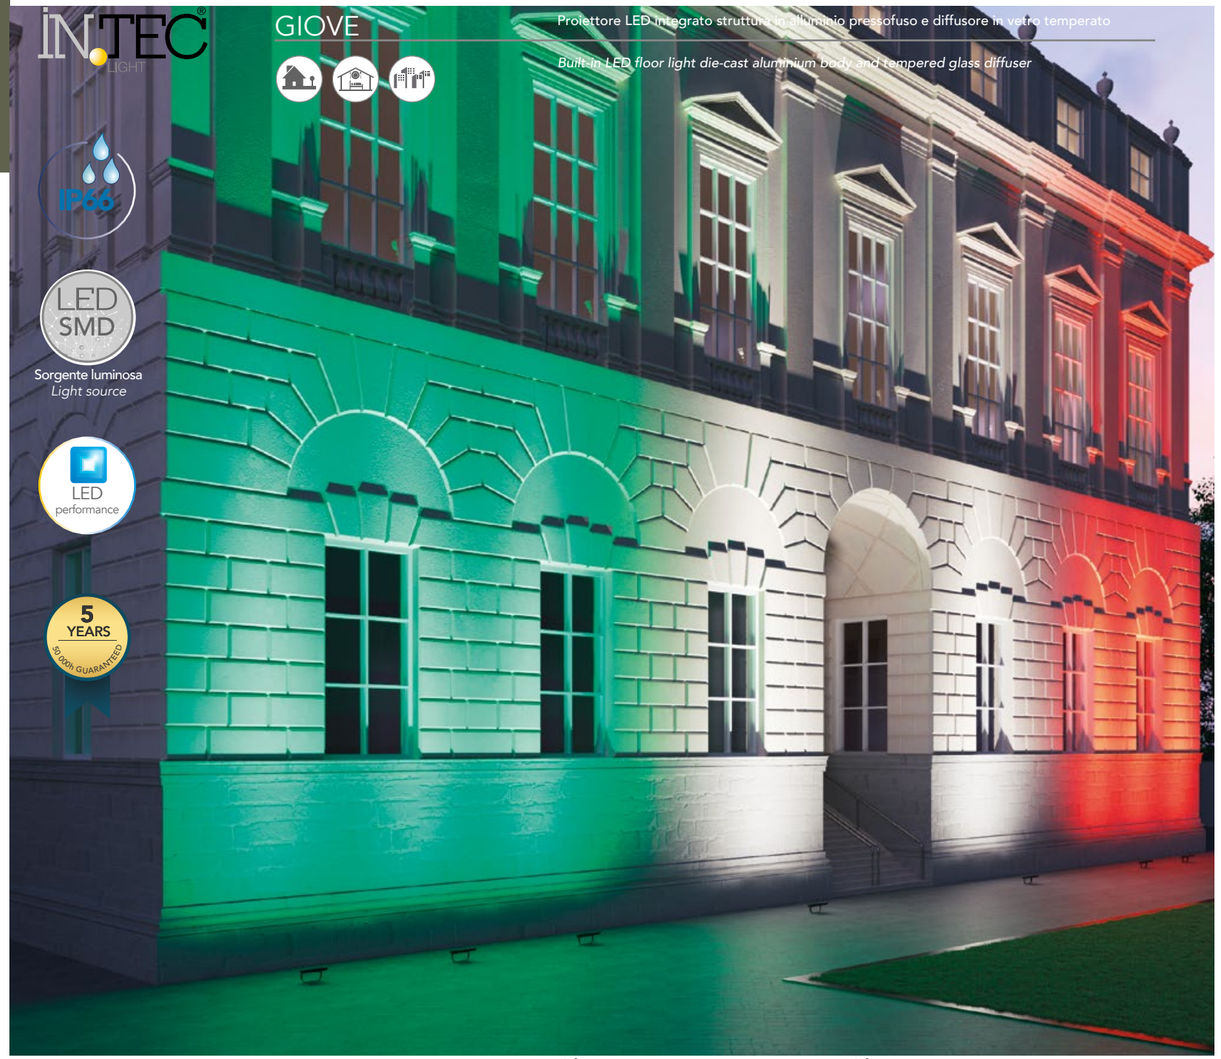

Materiale
Alluminio
Colore
Nero
Sorgente luminosa
LED SMD 200W - 300W - 400W
Flusso luminoso
32000 Lm - 47000 Lm - 66000 Lm
Driver
incluso
Temperatura colore
6000K
Durata e on/off
50.000 h >25.000 on/off
Angolo di luce
150°x 80°
CRI
>70
Grado IK
IK08

Materiale
Aluminium
Colour
Black
Sorgente luminosa
LED SMD 200W - 300W - 400W
Luminous flux
32000 Lm - 47000 Lm - 66000 Lm
Driver
included
Colour temperature
6000K
Lifetime and on/off
50.000 h >25.000 on/off
Beam angle
150°x 80°
CRI
>70
IK degree
IK08



Fotometria del Prodotto
Photometric curve of the product



LED-GIOVE-100

LED-GIOVE-100 8031414882557	100W - 16000 LM	PF 0,90

Misure - size
dimensioni in mm - size mm





Fotometria del Prodotto
Photometric curve of the product



LED-GIOVE-200

LED-GIOVE-200 8031414876365	200W - 32000 LM	PF 0,90		150°x 80°
LED-GIOVE-200-30 8031414885138	200W - 32000 LM	PF 0,90		30°
LED-GIOVE-200-60 8031414885145	200W - 32000 LM	PF 0,90		60°
LED-GIOVE-200R-30 8031414885152	200W - 32000 LM	PF 0,90		30°
LED-GIOVE-200R-60 8031414885169	200W - 32000 LM	PF 0,90		60°
LED-GIOVE-200V-30 8031414885176	200W - 32000 LM	PF 0,90		30°
LED-GIOVE-200V-60 8031414885183	200W - 32000 LM	PF 0,90		60°

Misure - size
dimensioni in mm - size mm





Fotometria del Prodotto
Photometric curve of the product



LED-GIOVE-300

LED-GIOVE-300 8031414876372	300W - 47000 LM	PF 0,90

Misure - size
dimensioni in mm - size mm





Fotometria del Prodotto
Photometric curve of the product



LED-GIOVE-300

LED-GIOVE-400 8031414876389	400W - 66000 LM	PF 0,90

Misure - size
dimensioni in mm - size mm



ZEUS

Proiettore LED integrato struttura in alluminio pressofuso e diffusore in vetro temperato

Built-in LED floor light die-cast aluminium body and tempered glass diffuser

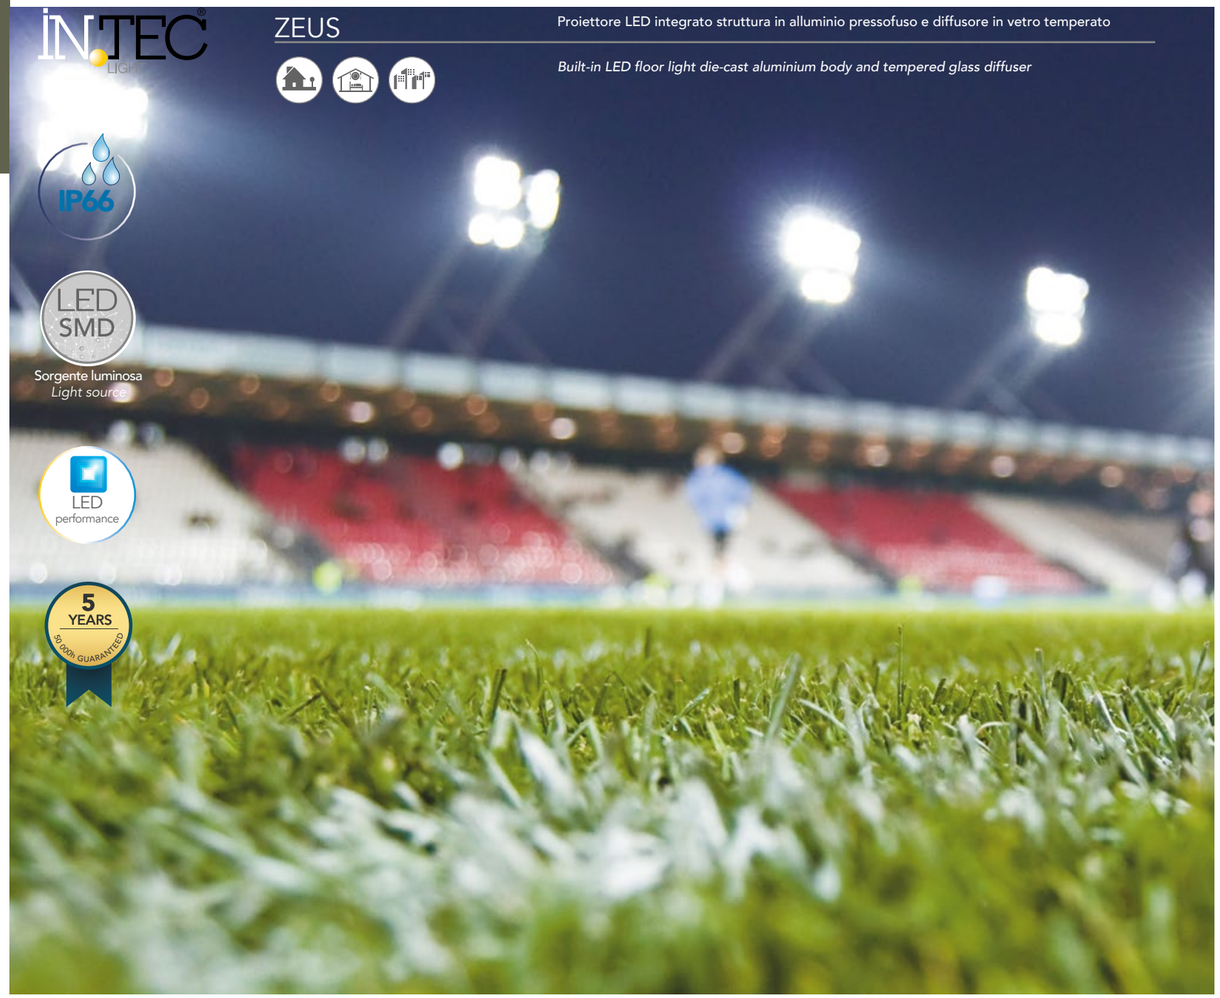

Materiale
Alluminio

Colore
Nero

Sorgente luminosa
LED SMD 100W - 180W - 240W

Flusso luminoso
16000 Lm - 28800 Lm - 38400 Lm

Driver
incluso

Temperatura colore
5000K

Durata e on/off
50.000 h >25.000 on/off

Angolo di luce
110°

CRI
>70

Grado IK
IK08

Material
Aluminium

Colour
Black

Light source
LED SMD 100W - 180W - 240W

Luminous flux
16000 Lm - 28800 Lm - 38400 Lm

Driver
included

Colour temperature
5000K

Lifetime and on/off
50.000 h >25.000 on/off

Beam angle
110°

CRI
>70

IK degree
IK08

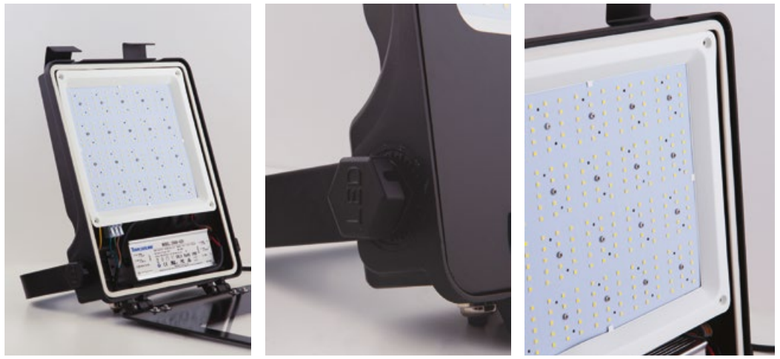



Fotometria del Prodotto

Photometric curve of the product



LED-ZEUS-100

LED-ZEUS-100 **100W - 16000 LM** PF 0,95
8031414868445

Misure - size
dimensioni in mm - size mm





Fotometria del Prodotto

Photometric curve of the product



LED-ZEUS-180

LED-ZEUS-180 **180W - 28800 LM** PF 0,95
8031414868452

Misure - size
dimensioni in mm - size mm





Fotometria del Prodotto

Photometric curve of the product



LED-ZEUS-240

LED-ZEUS-240 **240W - 38400 LM** PF 0,95
8031414868469

Misure - size
dimensioni in mm - size mm



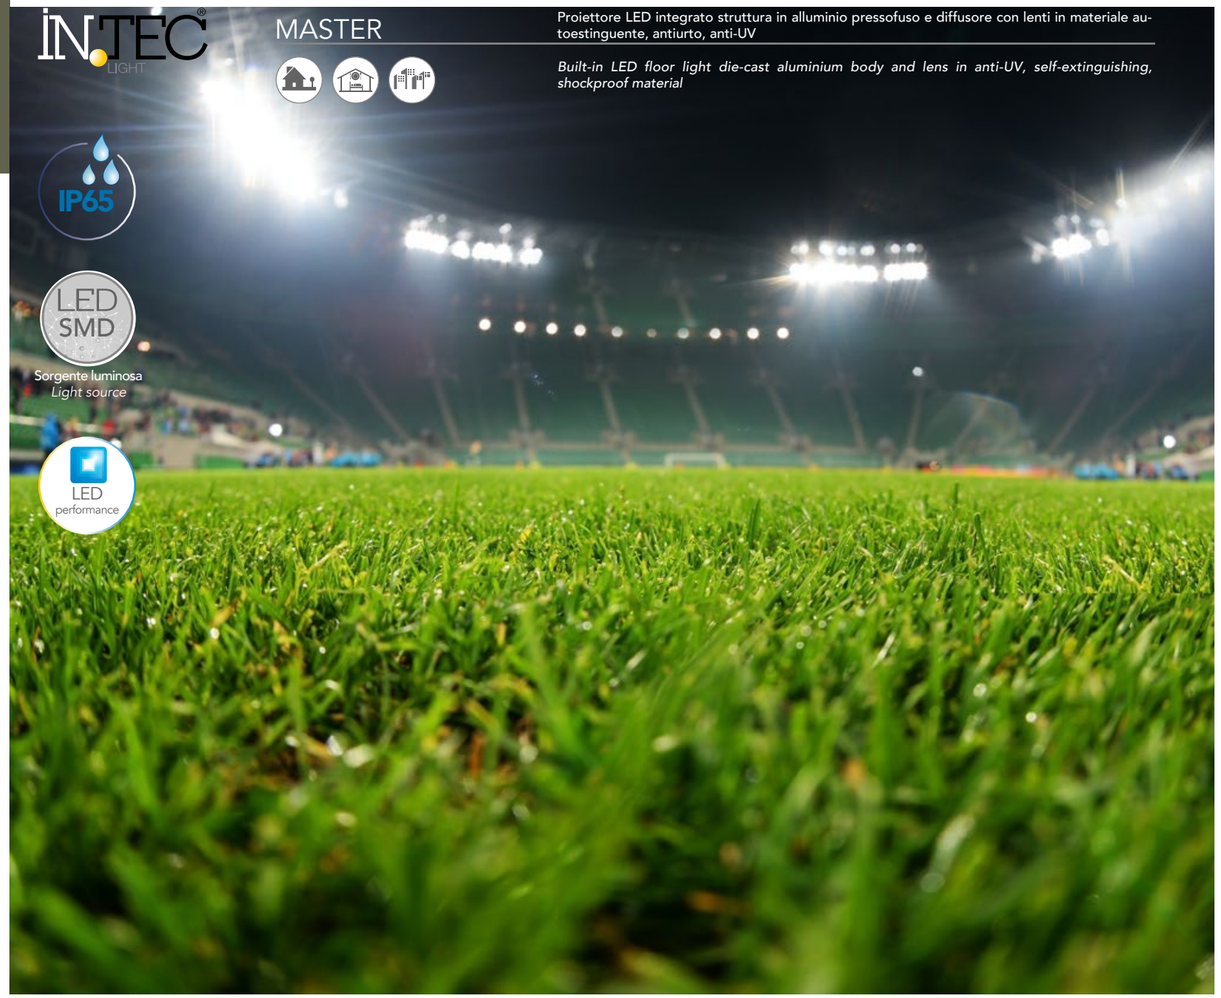

MASTER

Proiettore LED integrato struttura in alluminio pressofuso e diffusore con lenti in materiale autoestinguente, antiurto, anti-UV

Built-in LED floor light die-cast aluminium body and lens in anti-UV, self-extinguishing, shockproof material

Materiale
Alluminio

Colore
Nero

Sorgente luminosa
LED SMD 480W - 960W

Flusso luminoso
64800 Lm - 129600 Lm

Driver
incluso

Temperatura colore
5700K

Durata e on/off
50.000 h >25.000 on/off

Angolo di luce*
60x100°

CRI
>80

Grado IK
IK10

Material
Aluminium

Colour
Black

Light source
LED SMD 480W - 960W

Luminous flux
64800 Lm - 129600 Lm

Driver
included

Colour temperature
5700K

Lifetime and on/off
50.000 h >25.000 on/off

Beam angle*
60x100°

CRI
>80

IK degree
IK10

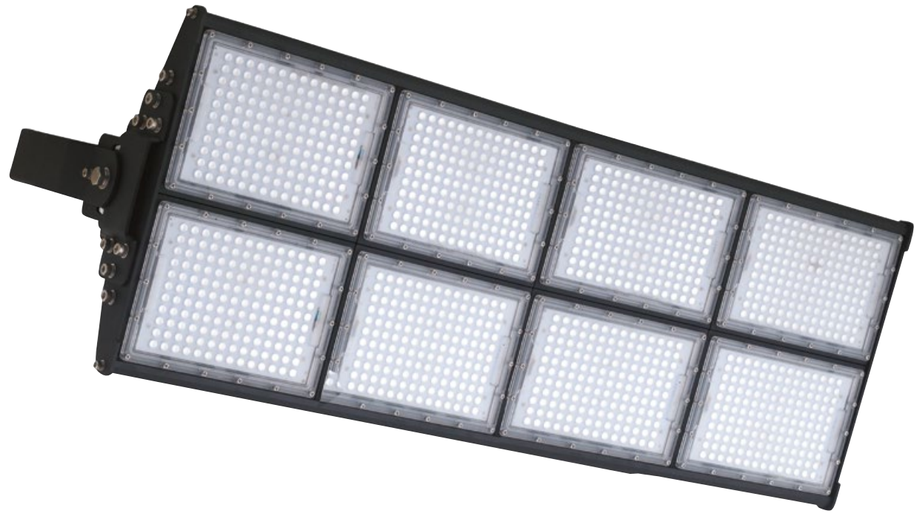

LED-MASTER-960 8031414862122	960W - 129600 LM	PF 0,90

Fotometria del Prodotto

Photometric curve of the product



LED-MASTER-960

Misure - size
dimensioni in mm - size mm

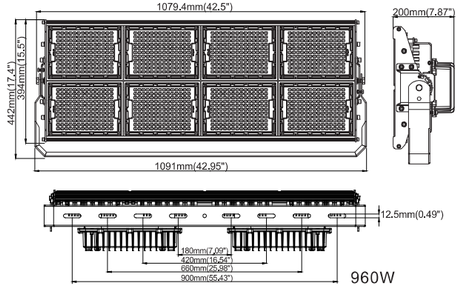

ENERGY

Faro LED integrato per [illegible] struttura in alluminio pressofuso e diffusore con lenti in materiale autoestinguente, antiurto, anti-UV

Gas station built-in LED light in die-cast aluminium body and lens in anti-UV, self-extinguishing, shockproof material

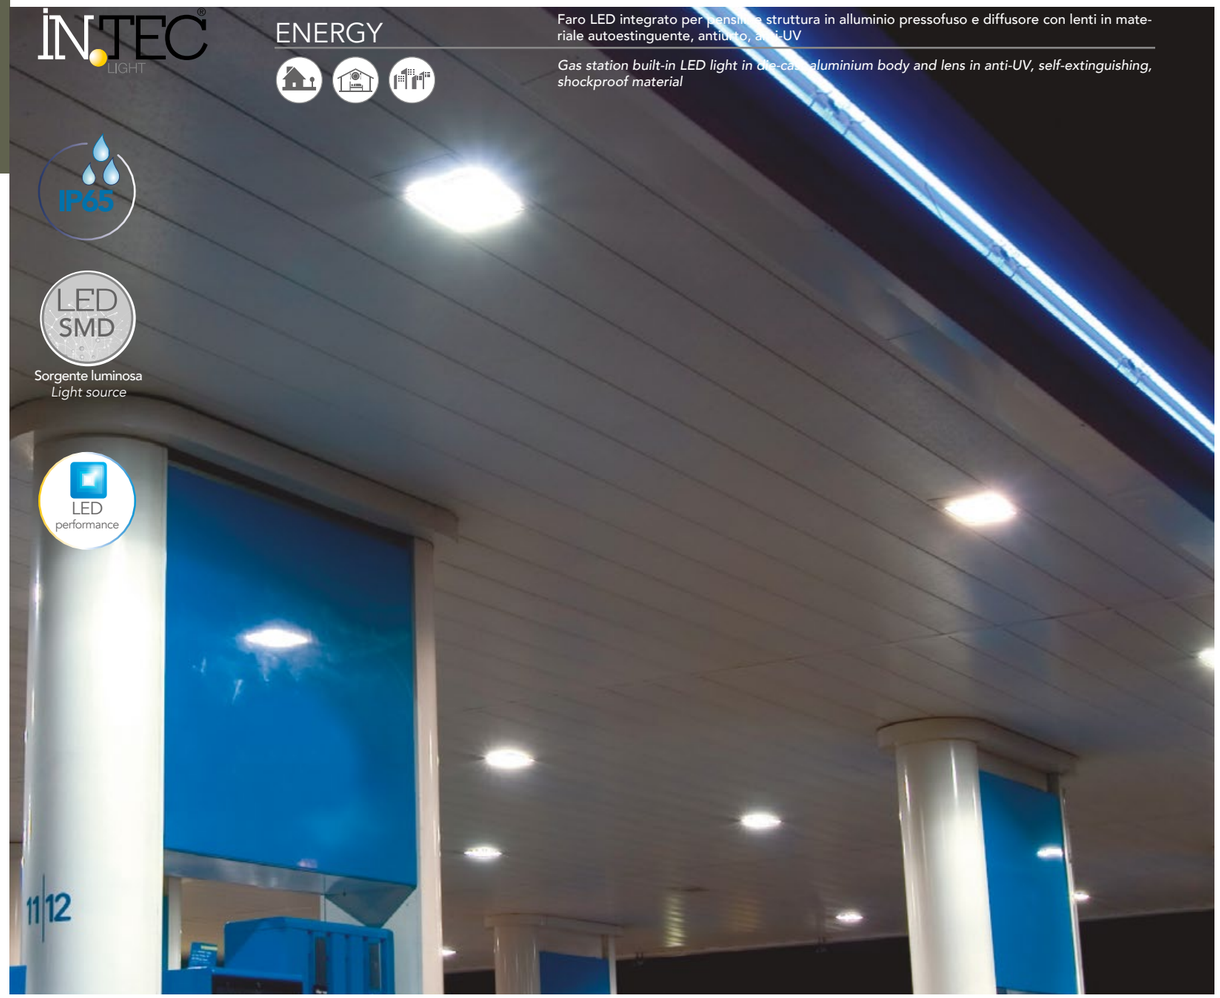

IP65

LED SMD

Sorgente luminosa
Light source

LED performance

Materiale Alluminio	**Material** Aluminium
Colore Bianco	**Colour** White
Sorgente luminosa LED SMD 80W	**Light source** LED SMD 80W
Flusso luminoso 10500 Lm	**Luminous flux** 10500 Lm
Driver incluso	**Driver** included
Temperatura colore 4000K	**Colour temperature** 4000K
Durata e on/off 50.000 h >25.000 on/off	**Lifetime and on/off** 50.000 h >25.000 on/off
Angolo di luce* 80°	**Beam angle*** 80°
CRI >80	**CRI** >80
Grado IK IK10	**IK degree** IK10





LED-ENERGY-80-INC 80W - 10500 LM PF 0,90
8031414862085

Misure - size
dimensioni in mm - size mm

Fotometria del Prodotto
Photometric curve of the product



LED-ENERGY-80-INC

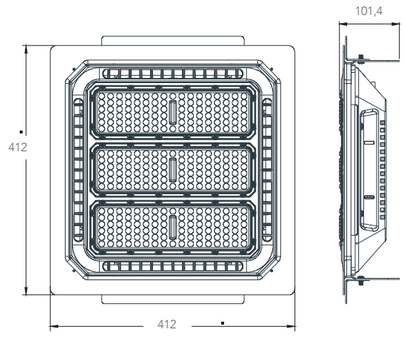



LED-ENERGY-80-PL 80W - 10500 LM PF 0,90
8031414862078

Misure - size
dimensioni in mm - size mm

Fotometria del Prodotto
Photometric curve of the product



LED-ENERGY-80-PL

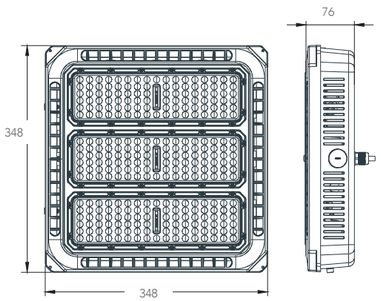

INVICTUS

Faro stradale LED in alluminio silver con pannello solare, diffusore con lenti in materiale auto-estinguente, antiurto, anti-UV

Silver aluminium LED street light with solar panel and lens in anti-UV, self-extinguishing, shockproof material

IP65

LED SMD

Sorgente luminosa
Light source

SOLAR

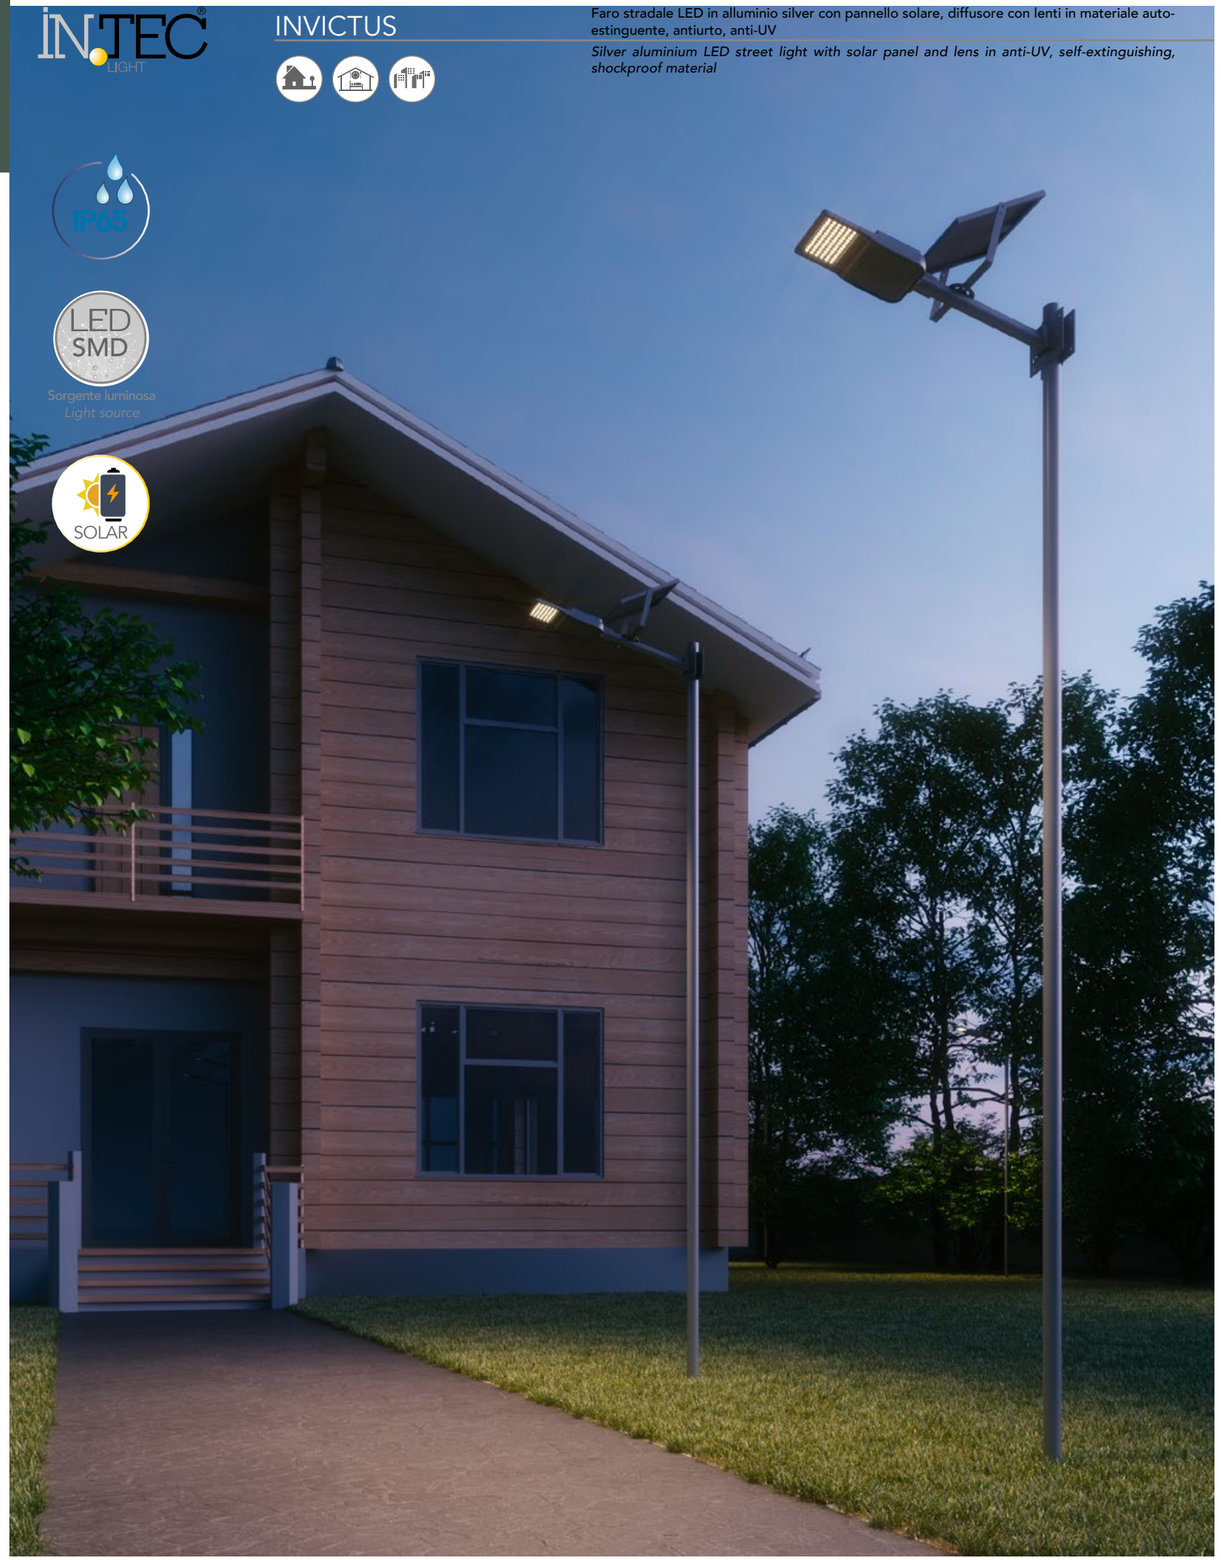



Materiale
Alluminio

Colore
Silver

Materiale pannello solare
Celle in silicio monocristallino

Sorgente luminosa
LED SMD 15W

Flusso luminoso
2400 Lm

Batteria
lithium 3,2V 36000 mAh

Temperatura colore
4000K

Angolo di luce
90°x120°

Material
Aluminium

Colour
Silver

Solar panel material
Monocrystalline silicon

Light source
LED SMD 15W

Luminous flux
2400 Lm

Battery
lithium 3,2V 36000 mAh

Colour temperature
4000K

Beam angle
90°x120°

Fotometria del Prodotto

Photometric curve of the product



LED-INVICTUS-SOLAR



LED-INVICTUS-SOLAR 8031414879090	15W

Accessori inclusi
Accessories included

Pannello solare
Solar panel



Radiocomando
Incluso - included



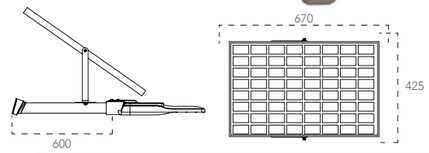

Misure - size
dimensioni in mm - size mm



IPERION

Faro stradale LED in alluminio silver con pannello solare

Silver aluminium LED street light with solar panel





Lenti in materiale autoestinguente, antiurto, anti-UV
lens in anti-UV, self-extinguishing, shockproof material

Sensore microwave
Microwave sensor

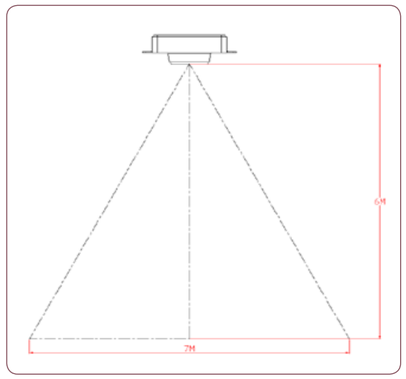

IP65

SOLAR

LED SMD

Sorgente luminosa
Light source

Materiale
Alluminio
Colore
Silver
Materiale pannello solare
Celle in silicio monocristallino
Sorgente luminosa
LED SMD 50W - 75W
Flusso luminoso
9000 Lm - 13500 Lm
Batteria
50W - lithium 12,8V 54000 mAh
75W - lithium 25,6V 36000 mAh
Temperatura colore
4000K
Angolo di luce
156°x71°

Material
Aluminium
Colour
Silver
Solar panel material
Monocrystalline silicon
Light source
LED SMD 50W - 75W
Luminous flux
9000 Lm - 13500 Lm
Battery
50W - lithium 12,8V 54000 mAh
75W - lithium 25,6V 36000 mAh
Colour temperature
4000K
Beam angle
156°x71°

LED-IPERION-50-SOLAR* 8031414879069	**50W - 9000 LM**
LED-IPERION-75-SOLAR* 8031414879076	**75W - 13500 LM**

Accessori inclusi
Accessories included

Pannello solare
Solar panel



Palo 60 cm
Pole 60 cm



Misure - size
dimensioni in mm - size mm

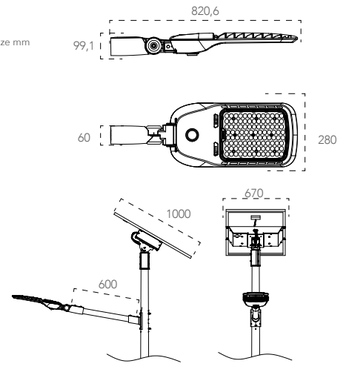

Fotometria del Prodotto
Photometric curve of the product

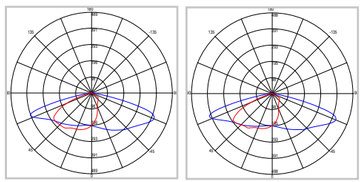

LED-IPERION-50-SOLAR LED-IPERION-75-SOLAR



LED-IPERION-REMOTE 8031414879083	Radiocomando multifunzione *Remote control multi-mode control*

***regolabile solo con radiocomando multifunzione** LED-IPERION-REMOTE
** adjustable only with* LED-IPERION-REMOTE *remote control*

FEBO

Faro stradale LED in alluminio con pannello solare

Aluminium LED street light with solar panel

IP65

SOLAR

LED SMD

Sorgente luminosa
Light source

Materiale
Alluminio
Colore
Silver
Materiale pannello solare
Celle in silicio monocristallino
Sorgente luminosa
LED SMD 40W
Flusso luminoso
6800 Lm
Batteria
lithium 15V 25000 mAh
Temperatura colore
4000K
Angolo di luce
156°x71°

Material
Aluminium
Colour
Silver
Solar panel material
Monocrystalline silicon
Light source
LED SMD 40W
Luminous flux
6800 Lm
Batterie
lithium 15V 25000 mAh
Colour temperature
4000K
Beam angle
156°x71°



Lenti in materiale autoestinguente, antiurto, anti-UV
lens in anti-UV, self-extinguishing, shockproof material





LED-FEBO-SOLAR 8031414879052	**40W - 6800**

Accessori inclusi
Accessories included

Pannello solare
Solar panel



Misure - size
dimensioni in mm - size mm



Fotometria del Prodotto
Photometric curve of the product



LED-FEBO-SOLAR



STREETWAY

Faro stradale LED integrato struttura in alluminio pressofuso e diffusore con lenti in materiale autoestinguente, antiurto, anti-UV

Built-in LED street light die-cast aluminium body and lens in anti-UV, self-extinguishing shockproof material

IP65

LED SMD

Sorgente luminosa
Light source

LED performance



Doppio sistema di montaggio. Per palo ø 60 mm
Double mounting system. Fit for ø 60 mm pole

Materiale
Alluminio

Colore
Silver

Sorgente luminosa
LED SMD 50W - 100W - 150W - 200W

Flusso luminoso
6500 Lm - 13000 Lm - 20250 Lm - 27000 Lm

Driver
incluso

Temperatura colore
4000K

Durata e on/off
50.000 h >25.000 on/off

Angolo di luce
80°x140°

CRI
>70

Grado IK
IK10

Material
Aluminium

Colour
Silver

Light source
LED SMD 50W - 100W - 150W - 200W

Luminous flux
6500 Lm - 13000 Lm - 20250 Lm - 27000 Lm

Driver
incluso

Colour temperature
4000K

Lifetime and on/off
50.000 h >25.000 on/off

Beam angle
80°x140°

CRI
>70

IK degree
IK10



LED-STREETWAY-50 — 50W - 6500 LM — PF 0,90
8031414876334

Misure - size
dimensioni in mm - size mm



Fotometria del Prodotto
Photometric curve of the product



LED-STREETWAY-50W



LED-STREETWAY-100 — 100W - 12500 LM — PF 0,90
8031414876341

LED-STREETWAY-100FC — 100W - 12500 LM — PF 0,90
8031414879113

CON SENSORE CREPUSCOLARE
WITH CREPUSCOLAR SENSOR

6 LUX ON 50 LUX OFF

Misure - size
dimensioni in mm - size mm



Fotometria del Prodotto
Photometric curve of the product



LED-STREETWAY-100W



LED-STREETWAY-150 — 150W - 19200 LM — PF 0,90
8031414876358

Misure - size
dimensioni in mm - size mm



Fotometria del Prodotto
Photometric curve of the product



LED-STREETWAY-150W



LED-STREETWAY-200 — 200W - 24000 LM — PF 0,90
8031414879106

Misure - size
dimensioni in mm - size mm



Fotometria del Prodotto
Photometric curve of the product



LED-STREETWAY-200W

HIGHWAY

Faro stradale LED integrato struttura in alluminio pressofuso e diffusore con lenti in materiale autoestinguente, antiurto, anti-UV

Built-in LED street light die-cast aluminium body and lens in anti-UV, self-extinguishing shockproof material

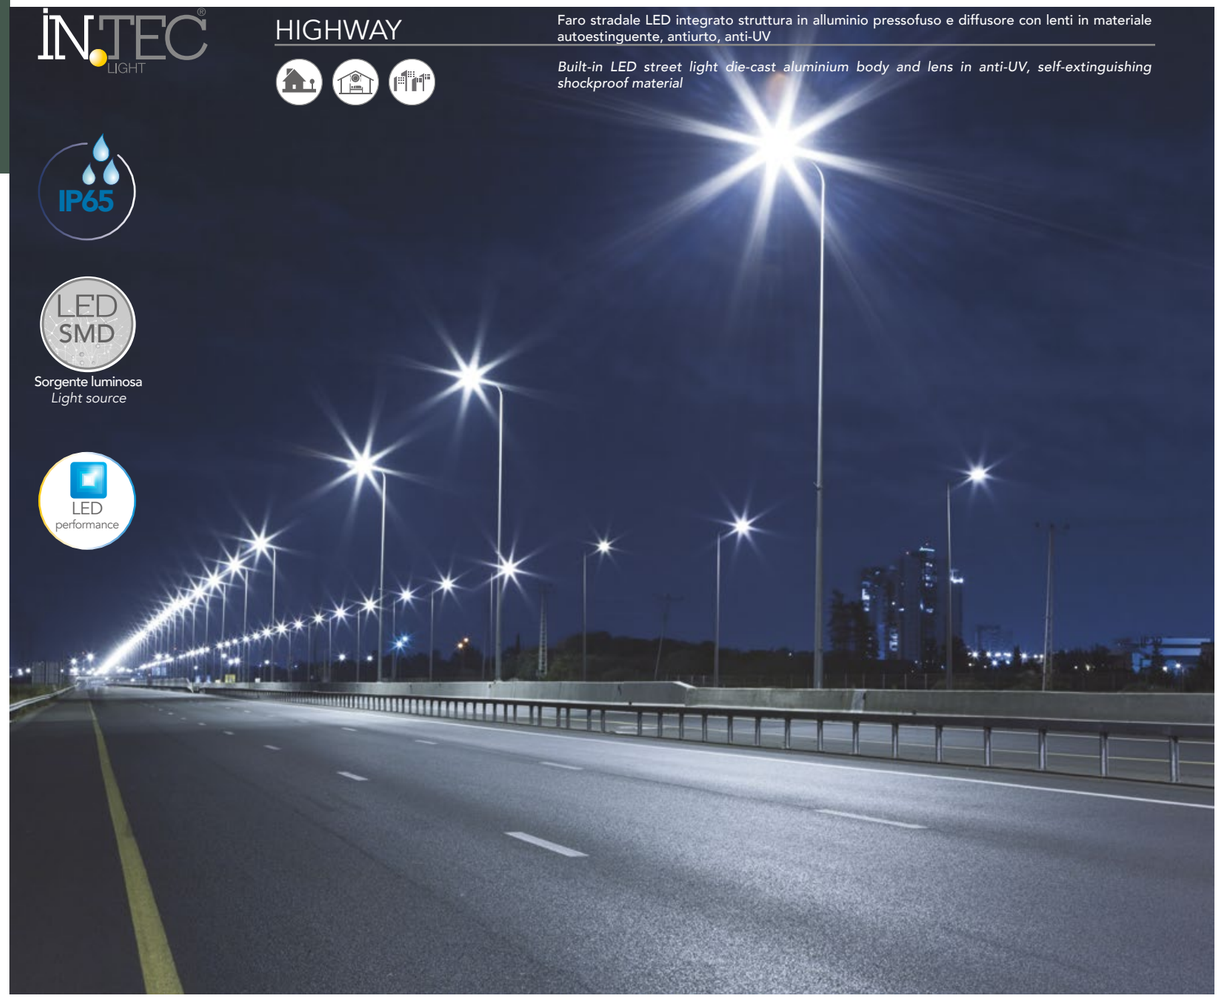

Materiale
Alluminio

Colore
Antracite

Sorgente luminosa
LED SMD 50W - 100W- 150W

Flusso luminoso
6000 Lm - 12000 Lm - 18000 Lm

Driver
incluso

Temperatura colore
4000K

Durata e on/off
30.000 h >15.000 on/off

Angolo di luce
135X80°

CRI
>70

Grado IK
IK06

Material
Aluminium

Colour
Anthracite

Light source
LED SMD 50W - 100W- 150W

Luminous flux
6000 Lm - 12000 Lm - 18000 Lm

Driver
included

Colour temperature
4000K

Lifetime and on/off
30.000 h >15.000 on/off

Beam angle
135X80°

CRI
>70

IK degree
IK06



LED-HIGHWAY-50 **50W - 6000 LM** PF 0,90
8031414877034

Misure - size
dimensioni in mm - size mm

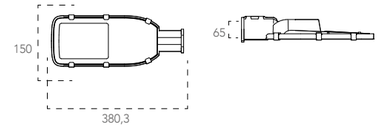

Fotometria del Prodotto
Photometric curve of the product



LED-HIGHWAY-50



LED-HIGHWAY-100 **100W - 12000 LM** PF 0,90
8031414877041

Misure - size
dimensioni in mm - size mm

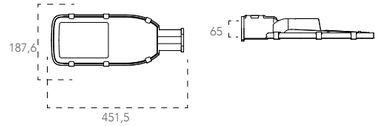

Fotometria del Prodotto
Photometric curve of the product



LED-HIGHWAY-100



LED-HIGHWAY-150 **150W - 18000 LM** PF 0,90
8031414877058

Misure - size
dimensioni in mm - size mm

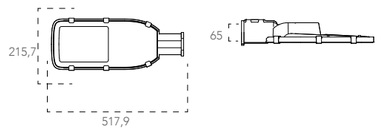

Fotometria del Prodotto
Photometric curve of the product



LED-HIGHWAY-150

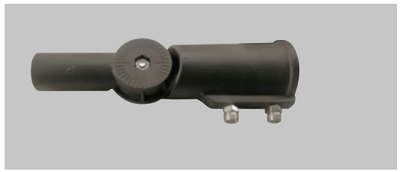

LED-HIGHWAY-ADAT
8031414877904

Adattatore 90° armature stradali highway imbocco palo 60mm
90°adapter 60mm pole entry for street light

Misure - size
dimensioni in mm - size mm



POLIS

Faro stradale LED con fissaggio su palo verticale orizzontale più versione a sospensione, in alluminio pressofuso con diffusore in vetro temperato

Built-in LED street light die-cast aluminium body with tempered glass diffuser structure with mount bracket on vertical or horizontal pole and version with suspension mount bracket



IP67

LED SMD

Sorgente luminosa
Light source

Materiale
Alluminio pressofuso

Colore
Silver

Sorgente luminosa
LED SMD 50W

Driver
incluso

Temperatura colore
4000K

Flusso luminoso
7000 LM

Durata e on/off
50.000 h - >25.000 on/off

Angolo di luce
155°x75°

CRI
>80

Grado IK
IK08

Material
Die-cust aluminum

Colour
Silver

Light source
LED SMD 50W

Driver
included

Colour temperature
4000K

Luminous flux
7000 LM

Lifetime and on/off
50.000 h - >25.000 on/off

Beam angle
155°x75°

CRI
>80

IK degree
IK08





Fotometria del Prodotto

Photometric curve of the product



LED-POLIS-50

LED-POLIS-50 **50W - 7000 LM** PF 0,90
8031414879465

Misure - size
dimensioni in mm - size mm

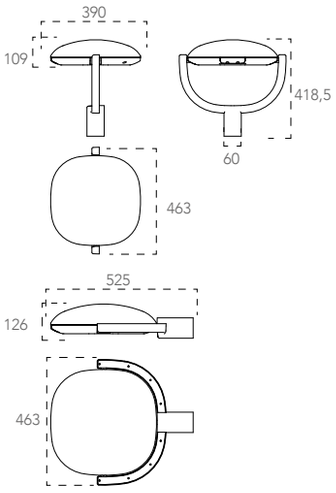



Fotometria del Prodotto

Photometric curve of the product



LED-POLIS-S50

LED-POLIS-S50 **50W - 7000 LM** PF 0,90
8031414879472

Misure - size
dimensioni in mm - size mm



STARGATE XP

Lampada LED high bay in alluminio nero

Black aluminium high bay LED lamp

IP65

LED SMD

Sorgente luminosa
Light source

LED performance



Materiale
Alluminio

Colore
Nero

Sorgente luminosa
LED SMD 100W - 150W - 200W

Flusso luminoso
14000 Lm - 21000 Lm - 28000 Lm

Driver
Incluso

Temperatura colore
4000K

Durata e on/off
50.000h >25.000 on/off

Angolo di luce
110°

CRI
>80

Grado IK
IK10

Material
Aluminium

Colour
Black

Light source
LED SMD 100W - 150W - 200W

Luminous flux
14000 Lm - 21000 Lm - 28000 Lm

Driver
Included

Color temperature
4000K

Lifetime and on/off
50.000h >25.000 on/off

Beam angle
110°

CRI
>80

IK degree
IK10





LED-STARGATE-100XP
8031414877799
100W - 14000 LM
PF 0,90

Misure - size
dimensioni in mm - size mm



LED-STARGATE-150XP
8031414877805
150W - 21000 LM
PF 0,90

Misure - size
dimensioni in mm - size mm



LED-STARGATE-200XP
8031414877812
200W - 28000 LM
PF 0,90

Misure - size
dimensioni in mm - size mm



Fotometria del Prodotto

Photometric curve of the product

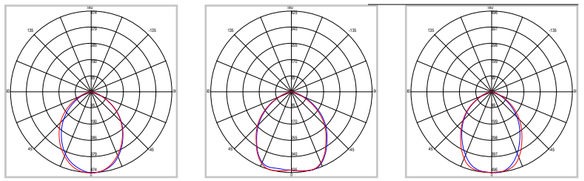

LED-STARGATE-100XP LED-STARGATE-150XP LED-STARGATE-200XP

SENSORI / SENSORS

SENSORI INDUSTRIALI DI MOVIMENTO
INDUSTRIAL MOTION SENSORS



LED-SENSOR-HB-DIM
8031414879748

IP65

120-277V
Load capacity
120VAC:4A
277VAC:3A



1



In un ambiente sufficientemente luminoso la lampada non si accende anche se viene rilevato movimento.
With sufficient ambient light, the light will not be switched on even if with motion signal



In un ambiente poco luminoso il sensore accende la lampada non appena viene rilevato un movimento.
With insufficient ambient light, the sensor switches on the light when motion is detected



Trascorso il tempo di attesa , il sensore spegne la lampada quando non viene rilevato movimento.
After elapse of hold time, the sensor switches off the light when no motion is detected

2



Se non viene rilevato movimento la lampada rimane ad un basso livello di luminosità
If there is motion detected, the light will be remained at a low light level all the time



Quando viene rilevato movimento, il sensore porta la lampada al 100% di luminosità
When motion is detected, the sensor will switch on the light to 100% brightness



Trascorso il tempo di attesa , il sensore attenua la luce all'attuale livello di luminosità se non è rilevato movimento
After elapse of hold time, the sensor dims the light at present low light level if no motion is detected

3



In un ambiente sufficientemente luminoso la lampada non si accende anche se viene rilevato movimento.
With sufficient ambient light, the light will not be switched on even if with motion signal



In un ambiente poco luminoso il sensore accende la lampada non appena viene rilevato un movimento.
With insufficient ambient light, the sensor switches on the light when motion is detected



Trascorso il tempo di attesa , il sensore attenua la luce all'attuale livello di luminosità se non è rilevato movimento
After elapse of hold time, the sensor dims the light at present low light level if no motion is detected



Trascorso il tempo di standby il sensore spegne la lampada se non è rilevato movimento
After elapse of standby period, the sensor switches off the light if no motion is detected



LED-SENSOR-HB
8031414879731

Load capacity
400W
220V ~ 240V





In un ambiente sufficientemente luminoso la lampada non si accende anche se viene rilevato movimento.
With sufficient ambient light, the light will not be switched on even if with motion signal



In un ambiente poco luminoso il sensore accende la lampada non appena viene rilevato un movimento.
With insufficient ambient light, the sensor switches on the light when motion is detected



Trascorso il tempo di attesa , il sensore spegne la lampada quando non viene rilevato movimento.
After elapse of hold time, the sensor switches off the light when no motion is detected

Accessori inclusi - *accessories included*





LED-SENSOR-TP
8031414879724

IP65

Load capacity
no limitation
220V ~ 240V





In un ambiente sufficientemente luminoso la lampada non si accende anche se viene rilevato movimento.
With sufficient ambient light, the light will not be switched on even if with motion signal



In un ambiente poco luminoso il sensore accende la lampada non appena viene rilevato un movimento.
With insufficient ambient light, the sensor switches on the light when motion is detected



Trascorso il tempo di attesa , il sensore spegne la lampada quando non viene rilevato movimento.
After elapse of hold time, the sensor switches off the light when no motion is detected



LED-SENSOR-REMOTE
8031414879717

Radiocomando per sensori industriali
Industrial sensors remote control

ATLANTIC

Plafoniera stagna per tubi a LED bilampada in PC+PC

Waterproof lamp for double LED tube in PC+PC

IP65 · LED T8 · PC + PC





LED-ATLANTIC-ST-60
8031440355315
2xT8 230V
non incluse - not included

Misure - size
dimensioni in mm - size mm





LED-ATLANTIC-ST-120
8031440355322
2xT8 230V
non incluse - not included

Misure - size
dimensioni in mm - size mm







LED-ATLANTIC-ST-150
8031440355292
2xT8 230V
non incluse - not included

Misure - size
dimensioni in mm - size mm



NAUTILUS

Plafoniere stagno in policarbonato

Water proof ceiling lamps in polycarbonate

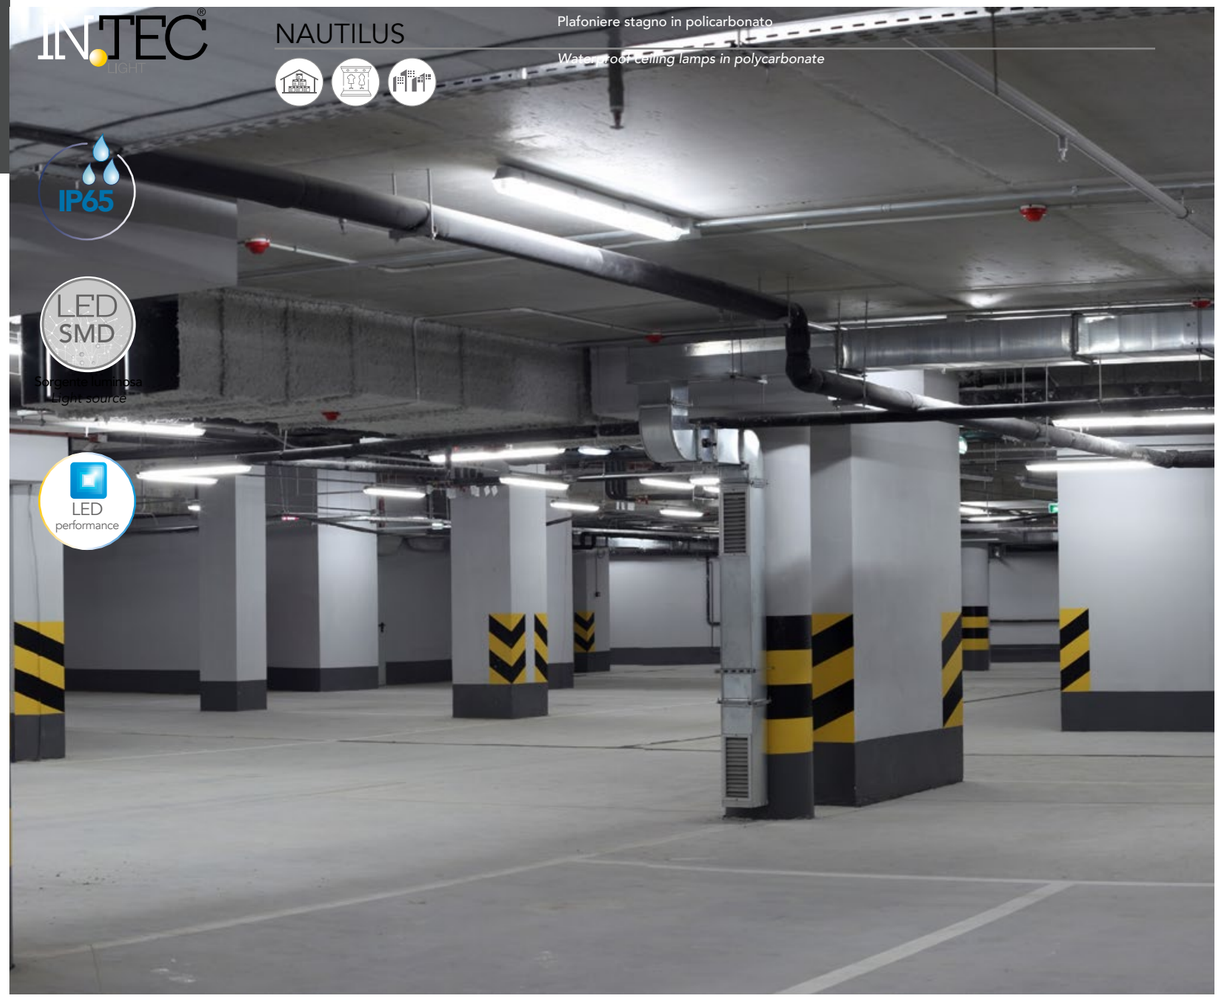

Materiale
Policarbonato

Colore
Silver

Sorgente luminosa
LED SMD 21W - 40W - 55W - 80W

Flusso luminoso
2730 Lm - 5200 Lm - 7150 Lm - 10400 Lm

Driver
Integrato

Temperatura colore
4000K

Durata e on/off
50.000 h >25.000 on/off

Angolo di luce
120°

CRI
>80

Grado IK
IK08

Material
Polycarbonate

Colour
Silver

Light source
LED SMD 21W - 40W - 55W - 80W

Luminous flux
2730 Lm - 5200 Lm - 7150 Lm - 10400 Lm

Driver
Built-in driver

Color temperature
4000K

Lifetime and on/off
50.000 h >25.000 on/off

Beam angle
120°

CRI
>80

IK degree
IK08



Fotometria del Prodotto

Photometric curve of the product



LED-NAUTILUS-60

LED-NAUTILUS-60 8031414876501 **21W - 2730 LM**

Misure - size
dimensioni in mm - size mm





Fotometria del Prodotto

Photometric curve of the product



LED-NAUTILUS-120

LED-NAUTILUS-120 8031414876518 **40W - 5200 LM** PF 0,90

Misure - size
dimensioni in mm - size mm





Fotometria del Prodotto

Photometric curve of the product



LED-NAUTILUS-150

LED-NAUTILUS-150 8031414876525 **55W - 7150 LM** PF 0,90

Misure - size
dimensioni in mm - size mm





Fotometria del Prodotto

Photometric curve of the product



LED-NAUTILUS-PRO

LED-NAUTILUS-PRO 8031414876532 **80W - 10400 LM** PF 0,90

Misure - size
dimensioni in mm - size mm



NAUTILUS-SENS
8031414878758





In un ambiente sufficientemente luminoso la lampada non si accende anche se viene rilevato movimento.

With sufficient ambient light, the light will not be switched on even if with motion signal



In un ambiente poco luminoso il sensore accende la lampada non appena viene rilevato un movimento.

With insufficient ambient light, the sensor switches on the light when motion is detected



Trascorso il tempo di attesa , il sensore spegne la lampada quando non viene rilevato movimento.

After elapse of hold time, the sensor switches off the light when no motion is detected

ARTIC

Plafoniera stagna LED integrato in policarbonato

Built-in LED TRI PROOF ceiling lamps in PC



Materiale
Policarbonato

Colore
Bianco

Sorgente luminosa
LED SMD 9W - 15W - 30W - 45W

Flusso luminoso
900 Lm - 1650 Lm - 3300 Lm - 4950 LM

Driver
Integrato

Temperatura colore
4000K

Durata e on/off
50.000 h >25.000 on/off

Angolo di luce
120°

CRI
>80

Grado IK
IK10

Material
Polycarbonate

Colour
White

Light source
LED SMD 9W - 15W - 30W - 45W

Luminous flux
900 Lm - 1650 Lm - 3300 Lm - 4950 LM

Driver
Built-in driver

Color temperature
4000K

Lifetime and on/off
50.000 h >25.000 on/off

Beam angle
120°

CRI
>80

IK degree
IK10



LED-ARTIC-30 8031414882625	**9W - 900 LM**	
LED-ARTIC-60 8031414882632	**15W - 1650 LM**	
LED-ARTIC-120 8031414882601	**30W - 3300 LM**	PF 0,90
LED-ARTIC-150 8031414882618	**45W - 4950 LM**	PF 0,90

Misure
size dimensioni in mm - size mm



AC230V
MULTI-CONNECT



Fotometria del Prodotto

Photometric curve of the product

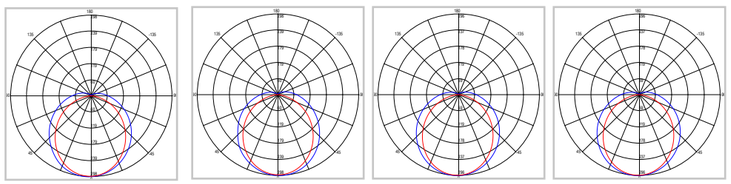

LED-ARTIC-30 LED-ARTIC-60 LED-ARTIC-120 LED-ARTIC-150

OCEAN

Plafoniera stagna LED integrato in policarbonato

Built-in LED TRI PROOF ceiling lamps in PC

Materiale
Policarbonato

Colore
Bianco

Sorgente luminosa
LED SMD 36W

Flusso luminoso
3240 Lm

Driver
Integrato

Temperatura colore
4000K

Durata e on/off
30.000 h >15.000 on/off

Angolo di luce
120°

CRI
>80

Grado IK
IK07

Material
Polycarbonate

Colour
White

Light source
LED SMD 36W

Luminous flux
3240 Lm

Driver
Built-in

Color temperature
4000K

Lifetime and on/off
30.000 h >15.000 on/off

Beam angle
120°

CRI
>80

IK degree
IK07

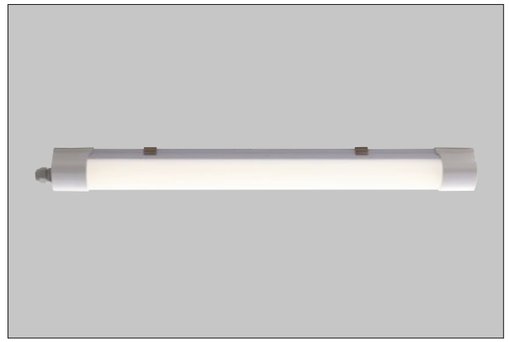

LED-OCEAN-SENS 8031414868858	**36W - 3240 LM**	PF 0,90

Misure - size
dimensioni in mm - size mm



con sensore microonde di movimento
with microwave motion sensor

crepuscolar sensor



motion sensor



CONCORDE

Plafoniera stagna in policarbonato LED integrato

PC LED TRI PROOF light

Materiale
Policarbonato

Colore
Bianco

Sorgente luminosa
LED SMD 30W - 60W - 75W

Flusso luminoso
3900 Lm - 7800 Lm - 9700 Lm

Driver
Integrato

Temperatura colore
4000K

Durata e on/off
50.000 h >25.000 on/off

Angolo di luce
120°

CRI
>80

Grado IK
IK10

Material
Polycarbonate

Colour
White

Light source
LED SMD 30W - 60W - 75W

Luminous flux
3900 Lm - 7800 Lm - 9700 Lm

Driver
Built-in driver

Color temperature
4000K

Lifetime and on/off
50.000 h >25.000 on/off

Beam angle
120°

CRI
>80

IK degree
IK10

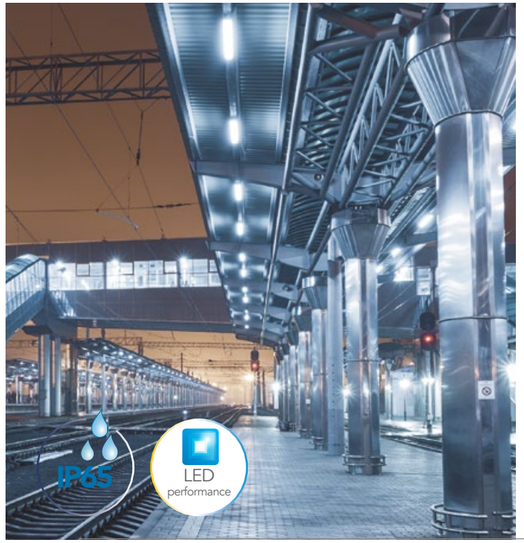



LED-CONCORDE-70 8031414868346	30W - 3900 LM	PF 0,90
LED-CONCORDE-130 8031414066766	60W - 7800 LM	PF 0,90
LED-CONCORDE-160 8031414868353	75W - 9700 LM	PF 0,90

Misure - size
dimensioni in mm - size mm





Misure - size
dimensioni in mm - size mm



Fotometria del Prodotto

Photometric curve of the product


LED-CONCORDE-70


LED-CONCORDE-130


LED-CONCORDE-160

SUPERIA

Lampada LED high bay in alluminio silver

Aluminium linear high bay LED lamp Silver finish

Materiale
Alluminio

Colore
Silver

Sorgente luminosa
LED SMD 100W - 150W - 200W

Flusso luminoso
15000 Lm - 22500 Lm - 30000 Lm

Driver
Incluso

Temperatura colore
4000K

Durata e on/off
50.000 h >25.000 on/off

Angolo di luce
120°

CRI
>80

Grado IK
IK10

Material
Aluminium

Colour
Silver

Light source
LED SMD 100W - 150W - 200W

Luminous flux
15000 Lm - 22500 Lm - 30000 Lm

Driver
Included

Color temperature
4000K

Lifetime and on/off
50.000 h >25.000 on/off

Beam angle
120°

CRI
>80

IK degree
IK10



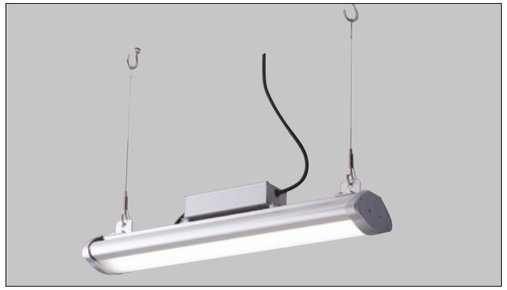

LED-SUPERIA-100 8031414868315	100W - 15000 LM	PF 0,90
LED-SUPERIA-150 8031414868865	150W - 22500 LM	PF 0,90
LED-SUPERIA-200 8031414868322	200W - 30000 LM	PF 0,90

Misure - size
dimensioni in mm - size mm



Fotometria del Prodotto

Photometric curve of the product


LED-SUPERIA-100


LED-SUPERIA-150


LED-SUPERIA-200

Accessori inclusi
included accessories

cavo 1m
1m cable

Kit sospenzione
suspension kit



Accessori non inclusi
not included accessories


LED-SUPERIA-PL
8031414870899
KIT 2pz ORIENTABILE 60°±


LED-SUPERIA-SOSP
8031414871803
Kit 2 pz cavi sospensione
5m fissaggio

Emergency light


I-DRIVER-SUPERIA-HELP
8031414868339
Emergency pack IP20 20W
for 3 hours

EASY DOMOTICA 24V

Con questo segmento tecnico intendiamo soddisfare al meglio la crescente esigenza di migliorare la qualità di vita domestica, e lavorativa attraverso l'utilizzo di dispositivi di illuminazione sempre più interconnessi fra loro tramite collegamenti sempre più semplificati dalle tecnologie wireless.

I dispositivi di illuminazione diventano uno strumento estremamente personalizzato e modulabile che si fondono, anche in diversi momenti della giornata, con le evolute esigenze di illuminazione non più fine a se stessa ma adattata ai diversi umori sia di una utenza professionale che di una utenza domestica o ludica.
Questa sezione raggruppa diverse tipologie di prodotti 24V (ad esempio indoor e outdoor) che, grazie all'utilizzo di accessori easy connector, possono essere connessi tra di loro per il controllo simultaneo.
Il controllo dei dispositivi diventa easy: la connessione ad alimentatori a tensione costante in parallelo è compatibile con centraline di controllo in Radio Frequenza 2,4G, Infrarossi, Wifi o Buetooth e le centraline, a loro volta, prevedono interfacce wifi, bluetooth oppure possono essere controllate tramite wall pad o radiocomandi.

With this technical segment, we intend meet in the best way the growing need to improve the quality of home and working life through the use of lighting devices that are increasingly interconnected with each other through connections that are increasingly simplified by wireless technologies.

The lighting devices become an extremely personalized and modular tool that merge, even at different times of the day, with the evolved lighting needs no longer as light source itself but light adapted to the different moods of both professional users, domestic users, playful users.
This section groups 24V products (for example indoor or outdoor) that, thanks to easy connector accessories, can be connected each other for simultaneous control.
Devices control becomes easy: constant voltage power supply in parallel connection system are compatible with 2.4G Radio Frequency, Infrared, Wifi or Bluetooth control units and the control units can be controlled by wifi, bluetooth devices or via a wall pad or remote control.





IP67



CAVO-4CH-CONN-MF
8031414878772

100 cm Cavo di connessione connettore M+F
100 cm Connection cable M+F connector



CAVO-4CH-CONN-T
8031414878789

40+20cm Cavo di connessione a T connettore M+F+F
40+20cm T connection cable M+F+F connector



CAVO-4CH-CONN-M
8031414878796

50 cm Cavo di connessione connettore M+cavi sciolti
50 cm Connection cable M+cables

XANTO-RF

Incasso in alluminio pressofuso antiriflesso

Materiale
Alluminio pressofuso

Colore
Bianco

Sorgente luminosa
LED SMD 12W - 30W

Driver
DC 24V non incluso
Tensione costante connessione in parallelo

Temperatura colore
RGB + 4000K

Flusso
846 Lm- 2088 Lm

Durata e on/off
25.000 h ~ >15.000 on/off

Angolo di luce
120°

CRI
>80

Diecast aluminium anti-glare down-light

Material
Die cast alluminium

Colour
White

Light source
LED SMD 12W - 30W

Driver
DC 24V not included
Costant voltage
parallel connecting system

Color temperature
RGB + 4000K

Luminous flux
846 Lm- 2088 Lm

Durability and on/off
25.000 h ~ >15.000 on/off

Light angle
120°

CRI
>80

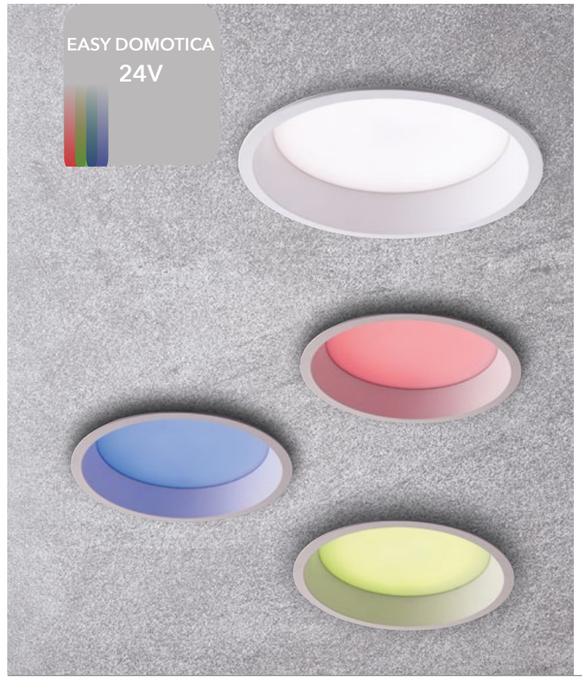



INC-XANTO-R120-24V 8031414877942	**12W 846LM**	
INC-XANTO-R220-24V 8031414878697	**30W 2088LM**	PF 0,90

Fotometria del Prodotto

Photometric curve of the product



INC-XANTO-R120-24V



INC-XANTO-R220-24V

Potenza - power	12W	30W
Foro - cut out dimensioni in mm	Ø 110	Ø 200
Misure - Size dimensioni in mm	47 Ø 120	55 Ø 220

PANEL

Pannello LED con struttura in alluminio diffusore in acrilico

LED panel with aluminum structure and acrylic diffuser

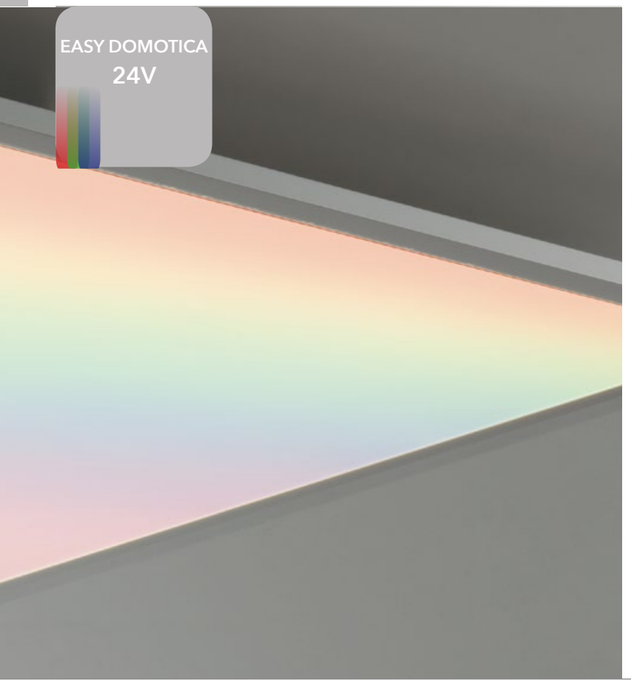

Materiale
Alluminio, diffusore in acrilico

Material
Aluminium, acrylic diffuser

Colore
Bianco

Colour
White

Sorgente luminosa
LED SMD 30W

Light source
LED SMD 30W

Driver
DC24V tensione costante non incluso

Driver
DC24V costant voltage not included

Temperatura colore
RGB + 4000K

Colour temperature
RGB + 4000K

Punti luce
1

Number of light sources
1

Flusso luminoso
2000 Lm

Luminous Flux
2000 Lm

Durata e on/off
20.000h ~ >10.000 on/off

Lifetime and on/off
20.000h ~ >10.000 on/off

Angolo di luce
120°

Beam angle
120°

CRI
>80

CRI
>80

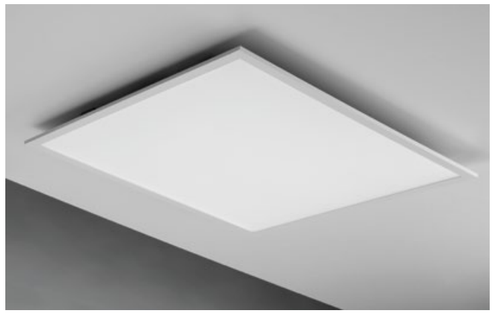

LED-PANEL-60X60-24V 8031414875313	30W	PF 0,90

Misure - size
dimensioni in mm - size mm

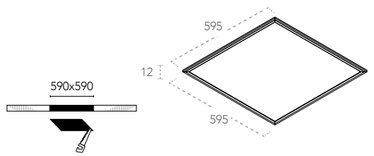

Fotometria del Prodotto

Photometric curve of the product



LED-PANEL-60X60-24V

STRIP

Rotolo strip LED 5 metri

5 meters roll strip LED



Materiale
Kapton senza silicone

Material
Kapton without silicone

Sorgente luminosa
60xLED/m SMD 5050

Light source
60xLED SMD 5050

Potenza
19,2W/m

Power
19,2W/m

Driver
DC24V tensione costante non incluso

Driver
DC24V costant voltage not included

Temperatura colore
RGB + 4000K

Colour temperature
RGB + 4000K

Flusso luminoso
570Lm/m

Luminous flux
570Lm/m

Grado di protezione
IP20

IP degree
IP20

Durata e on/off
50.000h ~ >25.000 on/off

Lifetime and on/off
50.000h ~ >25.000 on/off

CRI
>80

CRI
>80



	W/m	*Lm/m*	*LED/m*
STRIP24V-5050-RGBW 8031414871384	**19,2W**	**570 LM**	**60 LED**

Misure - Size



Misura taglio
cut - size



Fotometria del Prodotto

Photometric curve of the product



STRIP24V-5050-RGBW

STRIP

Rotolo strip LED 5 metri

Materiale
Kapton con rivestimento in silicone

Sorgente luminosa
60xLED/m SMD 5050

Potenza
19,2W/m

Driver
DC24V tensione costante non incluso

Temperatura colore
RGB + 4000K

Flusso luminoso
570Lm/m

Grado di protezione
IP68

Durata e on/off
50.000h ~ >25.000 on/off

CRI
>80

5 meters roll strip LED

Material
Kapton with silicone cover

Light source
60xLED/m SMD 5050

Power
19,2W/m

Driver
DC24V costant voltage not included

Colour temperature
RGBW + 4000K

Luminous flux
570Lm/m

IP degree
IP68

Lifetime and on/off
50.000h ~ >25.000 on/off

CRI
>80

EASY DOMOTICA 24V

IP68



	W/m	Lm/m	LED/m
STRIP24V-5050RGBW-IP68 8031414871407	19,2W	570LM	60 LED



Misure - Size



Misura taglio
cut - size



Fotometria del Prodotto

Photometric curve of the product



STRIP24V-5050RGBW-IP68

TARGET

Faro proiettore in alluminio con picchetto incluso

Materiale
Alluminio

Colore
Nero

Sorgente luminosa
LED COB 8W - 30W

Driver
DC24V tensione costante non incluso

Temperatura colore
RGB + 4000K

Flusso luminoso
340 - 840 Lm

Durata e on/off
30.000 h >15.000 on/off

Angolo di luce
30°

CRI
>80

Grado IK
IK10

Aluminium flood light with spike included

Material
Aluminum

Colour
Black

Source light
LED COB 8W - 30W

Driver
DC24V costant voltage not included

Colour temperature
RGB + 4000K

Luminous flux
340 - 840 Lm

Lifetime and on/off
30.000 h >15.000 on/off

Beam angle
30°

CRI
>80

IK degree
IK10

EASY DOMOTICA 24V

IP67





LED-TARGET-8-24V
8031414878604
8W - 340 Lm

Misure - size
dimensioni in mm - size mm



Fotometria del Prodotto

Photometric curve of the product





LED-TARGET-30-24V
8031414878550
30W - 840 LM

Misure - size
dimensioni in mm - size mm



Fotometria del Prodotto

Photometric curve of the product



SPRINT

Segnapassi incasso a pavimento o parete

Inground and wall recessed light

EASY DOMOTICA 24V



Materiale
Alluminio

Colore
Acciaio

Sorgente luminosa
LED 1,5W

Driver
DC 24V tensione costante
non incluso

Temperatura colore
RGB + 4000K

Flusso luminoso
29 Lm

Durata e on/off
25.000 h ~ >10.000 on/off

Angolo di luce
108°

CRI
>80

Grado IK
IK08

Material
Aluminium

Colour
Stainless steel color

Light source
LED 1,5W

Driver
DC 24V costant voltage
not included

Colour temperature
RGB + 4000K

Luminous flux
29 Lm

Lifetime and on/off
25.000 h ~ >10.000 on/off

Beam angle
108°

CRI
>80

IK degree
IK08

Calpestabile walkable

IP67



LED-SPRINT-R5-24V 8031414878543 — **1,5W**

Misure - size
dimensioni in mm - size mm



Accessori inclusi
Accessories included

x1
Cassetta di derivazione
Recessed box



Fotometria del Prodotto
Photometric curve of the product



LED-SPRINT-R5-24V

RUNNER

Segnapassi incasso a pavimento o parete

Inground and wall recessed light

EASY DOMOTICA 24V

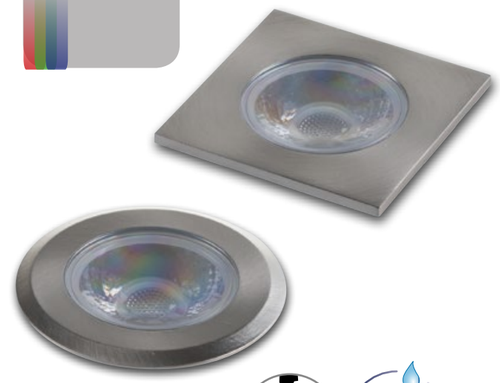

Materiale
Alluminio

Colore
Finitura nickel spazzolato

Sorgente luminosa
LED 10W

Driver
DC 24V tensione costante
non incluso

Temperatura colore
RGB + 4000K

Flusso luminoso
390 Lm

Durata e on/off
30.000 h ~ >15.000 on/off

Angolo di luce
30°

CRI
>80

Grado IK
IK10

Material
Aluminium

Colour
Brushed nickel finish

Light source
LED 10W

Driver
DC 24V costant voltage
not included

Colour temperature
RGB + 4000K

Luminous flux
390 Lm

Life time and on/off
30.000 h ~ >15.000 on/off

Beam angle
30°

CRI
>80

IK degree
IK10

Calpestabile walkable

IP67



LED-RUNNER-Q8-24V 8031414878536 — **10W**

Fotometria del Prodotto
Photometric curve of the product



LED-RUNNER-Q8-24V

Misure - size
dimensioni in mm - size mm



Accessori inclusi
Accessories included

x1
Cassetta di derivazione
Recessed box





LED-RUNNER-R8-24V 8031414878567 — **10W**

Fotometria del Prodotto
Photometric curve of the product



LED-RUNNER-R8-24V

Misure - size
dimensioni in mm - size mm



Accessori inclusi
Accessories included

x1
Cassetta di derivazione
Recessed box



Proiettore LED RGB full color in alluminio

LED RGB full color lamp in aluminium



Materiale
Alluminio

Material
Aluminium

Sorgente luminosa
LED 30x1W - 36x1W - 72x2W

Light source
LED 30x1W - 36x1W - 72x2W

Driver
incluso

Driver
included

Temperatura colore
RGB full color

Color temperature
RGB full color

Angolo di luce
45°

Beam angle
45°

Grado di protezione
IP65

IP degree
IP65

Durata e on/off
50.000h >25.000 on/off

Lifetime and on/off
50.000h >25.000 on/off

Grado IK
IK10

IK degree
IK10





LED-RAYS-30P
8031440358071
30X1W

Misure - size
dimensioni in mm - size mm









LED-RAYS-36P
8031440355445
36X1W

Misure - size
dimensioni in mm - size mm









LED-RAYS-72P
8031440358040
72X2W

Misure - size
dimensioni in mm - size mm







Proiettore LED RGB full color in alluminio

LED RGB full color lamp in aluminium



Materiale
Alluminio

Material
Aluminium

Sorgente luminosa
LED 18x2W - 36x2W

Light source
LED 18x2W - 36x2W

Driver
integrato

Driver
built-in

Temperatura colore
RGB full color

Color temperature
RGB full color

Angolo di luce
45°

Beam angle
45°

Grado di protezione
IP65

IP degree
IP65

Durata e on/off
50.000h >25.000 on/off

Lifetime and on/off
50.000h >25.000 on/off

Grado IK
IK10

IK degree
IK10

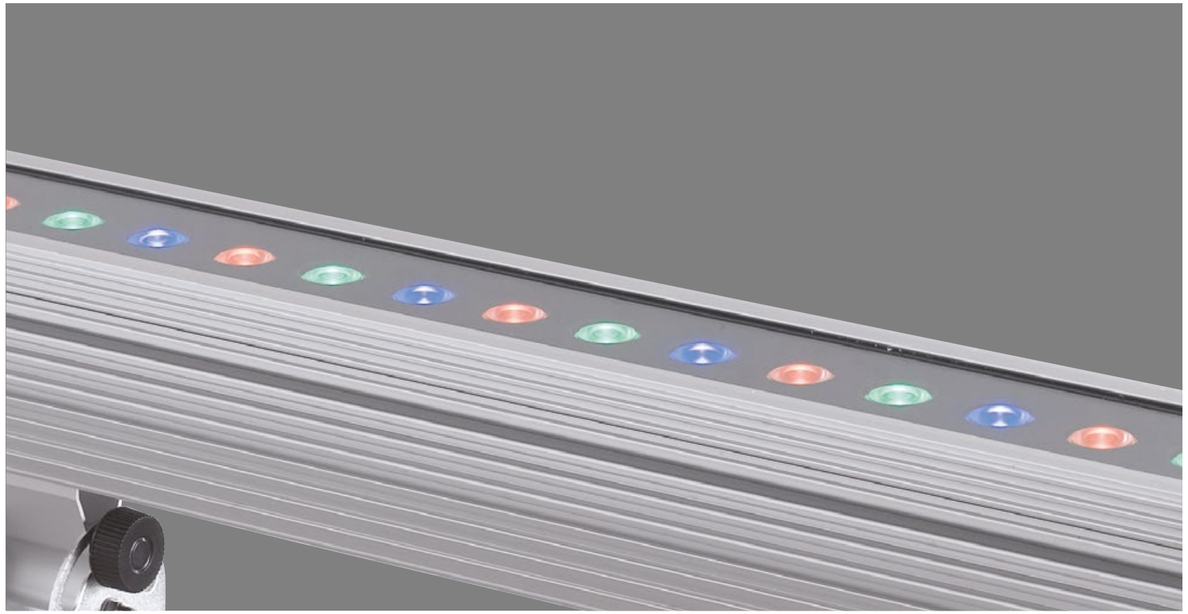







LED-WALLWASHER-18
8031440359559

18X2W

Misure - size
dimensioni in mm - size mm



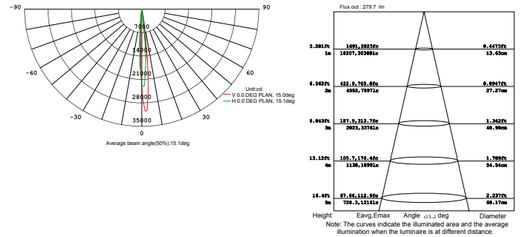







LED-WALLWASHER-36
8031440359528

36X2W

Misure - size
dimensioni in mm - size mm





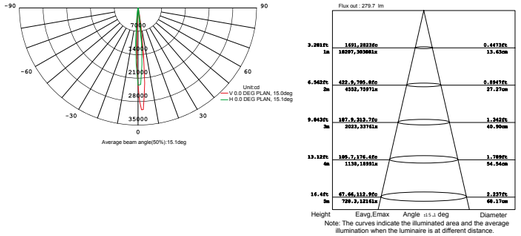

IRIDE

Proiettore LED monocolore o RGB FULL COLOR in alluminio

Materiale
Alluminio

Sorgente luminosa
LED 3x1W - 9x1W - 18x1W

Driver
DC 12/24V non incluso

Temperatura colore
RGB full color 6000K

Angolo di luce
45° - 30° - 40°

Grado di protezione
IP65

Durata e on/off
50.000h >25.000 on/off

CRI
>80

Grado IK
IK10

LED single colour or RGB full color lamp in aluminium

Material
Aluminium

Light source
LED 3x1W - 9x1W - 18x1W

Driver
DC 12/24V not included

Color temperature
RGB full color 6000K

Beam angle
45° - 30° - 40°

IP degree
IP65

Lifetime and on/off
50.000h >25.000 on/off

CRI
>80

IK degree
IK10

IP65



Dimming





LED-IRIDE-3P 8031440358101	RGB	3X1W		45°	DC12/24V
LED-IRIDE-3P-BCO 8031440359719		3X1W	240 LM	30°	DC12/24V

Misure - size
dimensioni in mm - size mm









LED-IRIDE-9P 8031440358118	RGB	9X1W		40°	DC12/24V
LED-IRIDE-9P-BCO 8031440359702		9X1W	720 LM	30°	DC12/24V

Misure - size
dimensioni in mm - size mm









LED-IRIDE-18P 8031440358088	RGB	18X1W		40°	DC24V
LED-IRIDE-18P-BCO 8031440359689		18X1W	1620 LM	30°	DC24V

Misure - size
dimensioni in mm - size mm







IRIDE

Incassi calpestabili LED RGB FULL COLOR
corpo in lega di alluminio, ghiera in acciaio 316

Materiale
Alluminio pressofuso

Sorgente luminosa
LED 3x1W - 9x1W - 18x1W

Driver
DC 12/24V non incluso

Temperatura colore
RGB full color

Angolo di luce
15°

Grado di protezione
IP67

Durata e on/off
50.000h >25.000 on/off

Grado IK
IK10

Walkable built-in LED RGB FULL COLOR light 316
stainless steel cover and aluminium alloy housing

Material
Die cast aluminium

Light source
LED 3x1W - 9x1W - 18x1W

Driver
DC 12/24V not included

Color temperature
RGB full color

Beam angle
15°

IP degree
IP67

Lifetime and on/off
50.000h >25.000 on/off

IK degree
IK10

IP67





Dimming





LED-IRIDE-R6
8031414868971
3X1W DC12/24V

Misure - size
dimensioni in mm - size mm









LED-IRIDE-R12
8031414868988
9X1W DC12/24V

Misure - size
dimensioni in mm - size mm









LED-IRIDE-R14
8031414868995
18X1W DC12/24V

Misure - size
dimensioni in mm - size mm







NEPTUNE

Proiettori LED IP68

Flood lamp LED IP68



Materiale
Acciaio inox 316

Colore
Finitura nero o silver

Sorgente luminosa
LED 36x1W - 3x3W

Driver
DC 24V non incluso

Temperatura colore
RGB full color

Angolo di luce
45° - 25°

Grado di protezione
IP68

Durata e on/off
50.000h >25.000 on/off

Grado IK
IK10

Material
316 stainless steel

Colour
Black or silver finish

Light source
LED 36x1W - 3x3W

Driver
DC 24V not included

Color temperature
RGB full color

Beam angle
45° - 25°

IP degree
IP68

Lifetime and on/off
50.000h >25.000 on/off

IK degree
IK10





LED-NEPTUNE-36P
8031440358057
RGB
36X1W
45°

Misure - size
dimensioni in mm - size mm



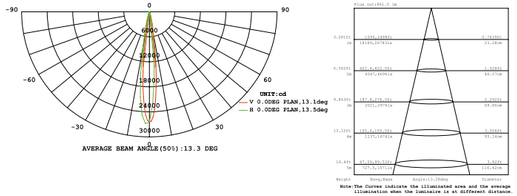

LED-NEPTUNE-3P
8031414869008
RGB
3X3W
25°

Misure - size
dimensioni in mm - size mm







CROWN

Incasso per fontane LED RGB full color

LED RGB full color fountain recess lamp

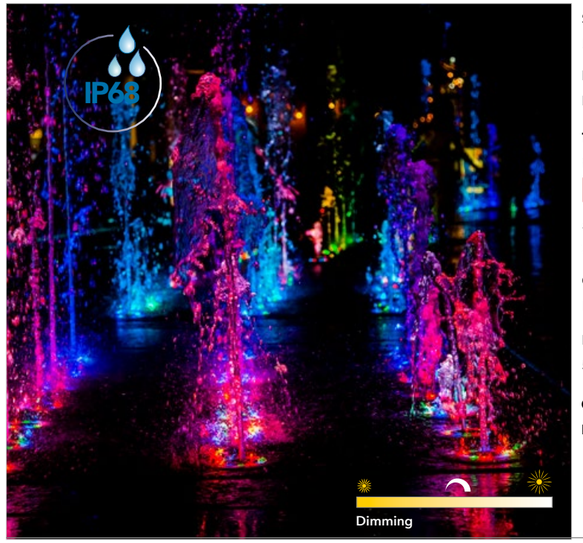

Materiale
Acciaio inox 316

Sorgente luminosa
LED 9x2W

Driver
DC 24V non incluso

Temperatura colore
RGB full color

Angolo di luce
25°

Grado di protezione
IP68

Durata e on/off
50.000h >25.000 on/off

Grado IK
IK10

Material
316 stainless steel

Light source
LED 9x2W

Driver
DC 24V not included

Color temperature
RGB full color

Beam angle
25°

IP degree
IP68

Lifetime and on/off
50.000h >25.000 on/off

IK degree
IK10



LED-CROWN-R14
8031414869015
RGB
9X2W

Misure - size
dimensioni in mm - size mm







TREVIS

Incasso immersione LED RGB full color

Immersion recessed light LED RGB full color



Materiale
Acciaio inox 316

Sorgente luminosa
LED 9W - 3W

Driver
DC 24V non incluso

Temperatura colore
RGB full color

Angolo di luce
25°

Grado di protezione
IP68

Durata e on/off
50.000h >25.000 on/off

Grado IK
IK10

Material
316 stainless steel

Light source
LED 9W - 3W

Driver
DC 24V not included

Color temperature
RGB full color

Beam angle
25°

IP degree
IP68

Lifetime and on/off
50.000h >25.000 on/off

IK degree
IK10





LED-TREVIS-R11
8031414869039
RGB
9W

Misure - size
dimensioni in mm - size mm



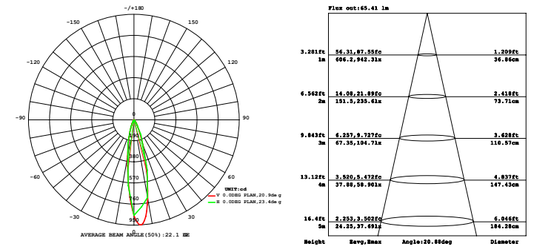



LED-TREVIS-R7
8031414869022
RGB
3W

Misure - size
dimensioni in mm - size mm



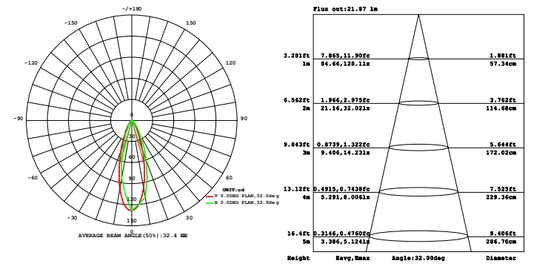

PAR56

Incasso LED a immersione per piscine

Pool immersion LED down light



Materiale
Policarbonato

Sorgente luminosa
LED 21W

Driver
AC 12V non incluso - DC 24V non incluso

Temperatura colore
RGB full color 5700K

Angolo di luce
45°

Grado di protezione
IP68

Durata e on/off
50.000h >25.000 on/off

CRI
>80

Grado IK
IK10

Material
PC

Light source
LED 21W

Driver
AC 12V not included - DC 24V not included

Color temperature
RGB full color 5700K

Beam angle
45°

IP degree
IP68

Lifetime and on/off
50.000h >25.000 on/off

CRI
>80

IK degree
IK10



LED-PAR56-RGB 8031440359535	RGB	21W	AC12V
LED-PAR56-BCO 8031440359504		21W 1050 LM	AC12V
LED-PAR56-24V-RGB 8031414879755	RGB	22W cavo 100 cm incluso 100 cm cable include	DC24V

Misure - size
dimensioni in mm - size mm









INC-POOL-PAR56 8031440359511	Struttura incasso per PAR 56 per piscine in cemento Recessed structure for PAR56 for concrete swimming pool

Misure - size
dimensioni in mm - size mm



CAVO INCLUSO *CABLE INCLUDED*

E-1. Recommended control mode and lamp



PELPS

Lampada LED per piscine con fissaggio a parete

Pool LED wall lamp

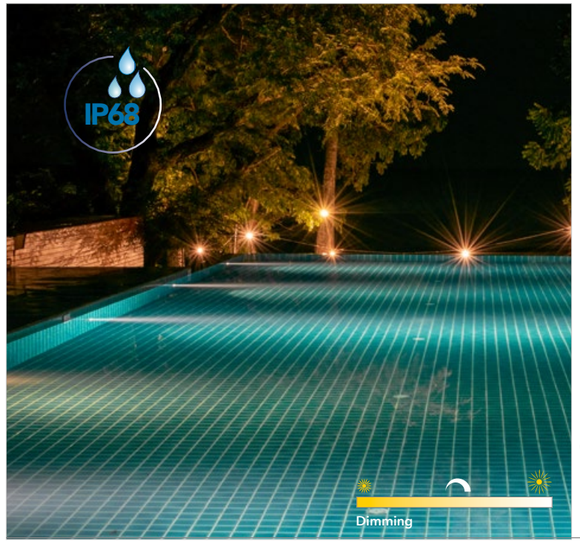

Materiale
Policarbonato

Sorgente luminosa
LED 18W

Driver
AC 12V non incluso - DC 24V non incluso

Temperatura colore
RGB full color 5700K

Angolo di luce
45°

Grado di protezione
IP68

Durata e on/off
50.000h >25.000 on/off

CRI
>80

Grado IK
IK10

Material
PC

Light source
LED 18W

Driver
AC 12V not included - DC 24V not included

Color temperature
RGB full color 5700K

Beam angle
45°

IP degree
IP68

Lifetime and on/off
50.000h >25.000 on/off

CRI
>80

IK degree
IK10



LED-PELPS-RGB 8031414865406	RGB	18W	AC12V
LED-PELPS-BCO 8031414865420		18W 1122 LM	AC12V
LED-PELPS24V-RGB 8031414868872	RGB	18W cavo 100 cm incluso 100 cm cable include	DC24V

Misure - size
dimensioni in mm - size mm

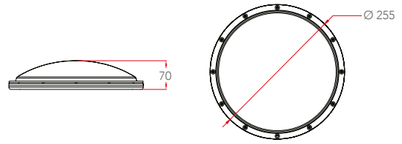





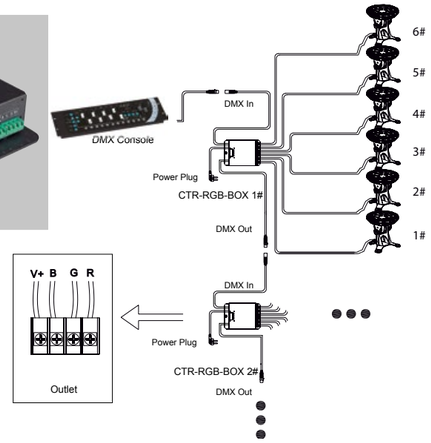

CONTROLLER-CTR-RGB
8031440358026
CENTRALINA DI COMANDO C/PORTA DMX512 LED RGB INPUT 230V AC OUTPUT DC (12V 144W - 24V 300W) 6 PORTE DA 3 CANALI RGB
CONTROL BOX WITH DMX512 PORT FOR LED RGB INPUT 230V AC OUTPUT DC (12V 144W - 24V 300W) 6 PORTE DA 3 CANALI RGB

CONTROLLER-CTR-RGB12
8031440355438
CENTRALINA DI COMANDO C/PORTA DMX512 LED RGB INPUT 230V AC OUTPUT DC (12V 300W 6 PORTE DA 3 CANALI RGB
CONTROL BOX WITH DMX512 PORT FOR LED RGB INPUT 230V AC OUTPUT DC 12V 300W 6 PORTE DA 3 CANALI RGB

Misure - size
dimensioni in mm - size mm





CONTROLLER-PRO-3
8031440358033
CONTROLLER MASTER 3 CANALI PER USO PROIETTORI IN MODALITA EASY IN 230V OUT DMX/XLR-3 2 CANALI IP20
CONTROLLER MASTER 3 CHANNELS FOR FLOOD IN EASY MODE IN 230V OUT DMX/XLR-3 2 CHANNELS IP20

Misure - size
dimensioni in mm - size mm





CONTROLLER-PRO-2
8031440358002
CONTROLLER DMX LED 3 CHANNELS RGB OUTPUT SIGNAL
DMX/XLR-3 (TWO PORT) IP20 WITH CHARGE CABLE

Misure - size
dimensioni in mm - size mm



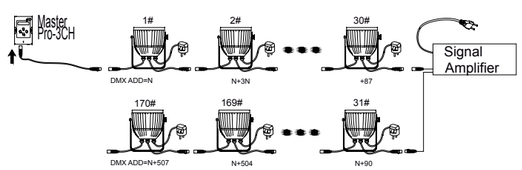



CONTROLLER-POOL
8031440359481
CONTROLLER 240V AC MAX 5A/1100W IP65 DISTANZA MAX 30M
CONTROLLER 240V AC MAX 5A/1100W IP65 MAX DISTANCE 30M

Misure - size
dimensioni in mm - size mm

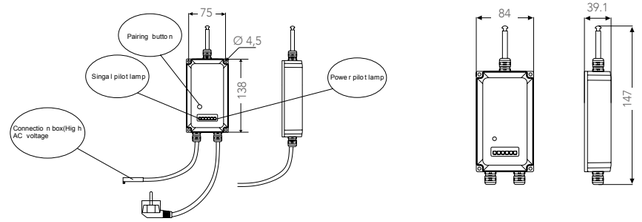

E-1. Recommended control mode and lamp

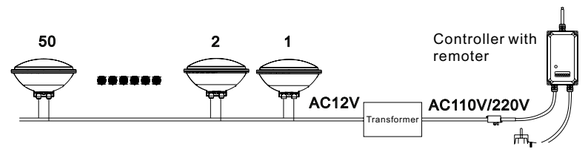

E-2.Othe r contro l modes and lamps

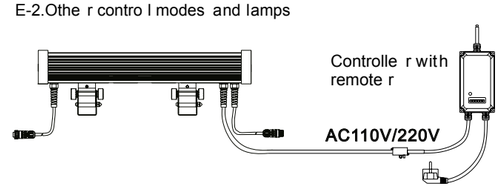



CONTROLLER-DMX-24
8031414872718
CONTROLLER DMX 24 CANALI TENSIONE COSTANTE 4A
INPUT VOLTAGE 12/24V DC OUTPUT POWER 24X(48-96)W OUTPUT CURRENT 24X4A
MISURE 264,5X83X42 MM
CONTROLLER DMX 24 CHANNELS CONSTANT VOLTAGE 4A INPUT VOLTAGE 12/24V DC OUTPUT POWER 24X(48-96)W OUTPUT CURRENT 24X4A MISURE 264,5X83X42 MM

Misure - size
dimensioni in mm - size mm 264,5x83x42 mm





SPLITTER-DMX-4
8031440359542
SPLITTER DMX 6W XLR-3X4PCS XLR-5X4PCS
DMX SPLITTER 6W XLR-3X4PCS XLR-5X4PCS

Misure - size
dimensioni in mm - size mm

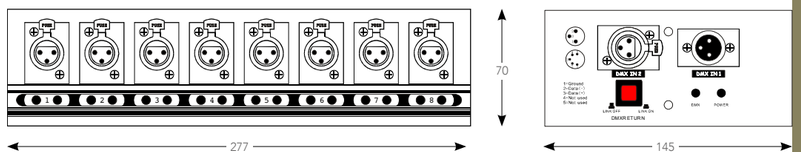



LED-SUNLITE-DE3
8031440359498

SUNLITE 2X512 DMX ESA PRO/SUITE 2

Misure - size
dimensioni in mm - size mm





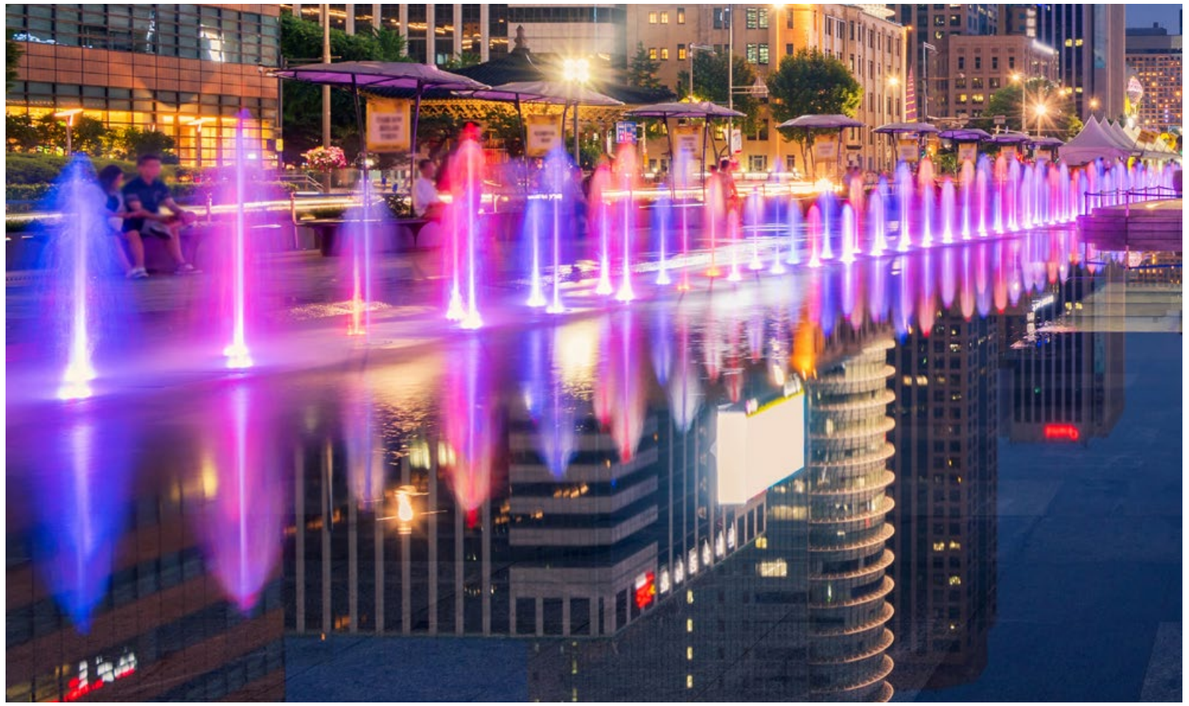



LED-SUNLITE-U9
8031440359467

SUNLITE CONTROLLER 256 CANALI INPUT (218 STEPS MAX)
SUNLITE CONTROLLER 256 CHANNELS INPUT (218 STEPS MAX)

Misure - size
dimensioni in mm - size mm







LED-SUNLITE-GU2
8031422251093

SUNLITE DMX STICK-GU2 128 CANALI INPUT 240V
SUNLITE DMX STICK-GU2 128 CHANNELS INPUT 240V

Misure - size
dimensioni in mm - size mm







TRASFORMATORE-120
8031440355094

TRASFORMATORE DI TENSIONE 120W
INPUT 240V AC OUTPUT 12V AC IP44 10A
mis. 180x134x63 mm

IP44



LED-IRIDE-CAVO-2M-2P
8031440355452

CAVO 2 POLI X FARO IRIDE BIANCO ALLUMINIO IP65
2 m

IP65



LED-IRIDE-CAVO-2M
8031440358095

CAVO RGB 4 POLI X FARO IRIDE RGB ALLUMINIO IP65 BIANCO
2 m

IP65



CONNETTORE-M
8031440355469

CONNETTORE IP68
MASCHIO PER DMX

IP68



CONNETTORE-F
8031440355476

CONNETTORE IP68
FEMMINA PER DMX

IP68



CONNECTBOX-IP68-3
8031440358903

SCATOLA CONNESSIONE IP68 A TRE POLI
Misure 35x115x71 mm

IP68



CONNECTBOX-IP68-2
8031440358927

SCATOLA CONNESSIONE IP68 A DUE POLI
Misure 30x115x41 mm

IP68



GUAINA
8031440355483

GUAINA ISOLANTE IP65

IP65



I-DRIVER/4W
8031414862801

MINI Driver corrente costante - Constant current driver
Output 2-12V 350mA 4W IP65
Input 100 ~ 240V

IP65

Misure - size
dimensioni in mm - size mm
38X27X21



I-DRIVER/4W-24V
8031414871797

MINI Driver tensione costante - Constant voltage driver
Output 24V DC 0.17A 4W IP65
Input 100 ~ 240V AC 50 ~ 60Hz

IP65

Misure - size
dimensioni in mm - size mm
38X27X21



I-DRIVER-LT-75-24
8031414876822

LT Driver tensione costante - Constant voltage driver
Output 24VDC 3.12A 75W
Input 220 ~ 240V AC

Misure - size
dimensioni in mm - size mm
305X30X17



I-DRIVER-LT-150-24
8031414876846

LT Driver tensione costante - Constant voltage driver
Output 24V DC 6.25A 150W
Input 220 ~ 240V AC

Misure - size
dimensioni in mm - size mm
336X30X17

DRIVER EMERGENZA



I-DRIVER-EMERGENCY
8031414864751

Driver Di Emergenza - Emergency driver
6-60V 400-40mA 4W 180Min
Battery 3,6V 3.0Ah Ni-Cd

Misure - size
dimensioni in mm - size mm
160X38X28



I-DRIVER-HELP
8031414862559

Driver Di Emergenza
Output Voltage 10-120V - Input Voltage 85-265V
3-40W.emergenza 120Min. 18650 Li-Ion Battery
3,7V 2.4Ah

Misure - size
dimensioni in mm - size mm
131X55X21



I-DRIVER-HELP-HV
8031414882595

Emergency output voltage: 230V DC, suitable for:
2.5W emergency power, 3 hours emergency time
3.5W emergency power, 2 hours emergency time
5W emergency power, 1.5 hours emergency time
Battery 18650 LiFePO4 6.4V 1500mAh

Misure - size
dimensioni in mm - size mm
160X38X28

ALIMENTATORI

Alimentatori tensione costante LRS e RSP 12V - Costant voltage power supply LRS e RSP 12V

MEAN WELL

	STRIP-DRIVER12V-35W 8031440360265	Output 12V 3A 36W Input 85 ~ 264VAC 120 ~ 373VDC	Misure - size dimensioni in mm - size mm 99X82X30
	STRIP-DRIVER12V-50W 8031414866779	Output 12V 4.2A 50W Input 85 ~ 264VAC 120 ~ 373VDC	Misure - size dimensioni in mm - size mm 99X82X30
	STRIP-DRIVER12V-75W 8031439581268	Output 12V 6A 72W Input 85 ~ 264VAC 120 ~ 373VDC	Misure - size dimensioni in mm - size mm 99X97X30
	STRIP-DRIVER12V-100W 8031440359368	Output 12V 8.5A 102W Input 85 ~ 264VAC 120 ~ 373VDC	Misure - size dimensioni in mm - size mm 129X97X30
	STRIP-DRIVER12V-150W 8031439611262	Output 12V 12.5A 150W Input 85 ~ 132VAC / 170 ~ 264VAC by switch 240 ~ 370VDC(switch on 230VAC)	Misure - size dimensioni in mm - size mm 159X97X30
	STRIP-DRIVER12V-200W 8031440359375	Output 12V 16,7A 200W Input 85 ~ 264VAC 124 ~ 370VDC	Misure - size dimensioni in mm - size mm 215X115X30
	STRIP-DRIVER12V-320W 8031440359344	Output 12V 26,7A 320W Input 88 ~ 264VAC 124 ~ 370VDC	Misure - size dimensioni in mm - size mm 215X115X30

ALIMENTATORI

Alimentatori tensione costante LRS e RSP 24V - Costant voltage power supply LRS e RSP 24V

MEAN WELL

	STRIP-DRIVER24V-35W 8031414870943	Output 24V 1,5A 36W Input 85 ~ 264VAC 120 ~ 373VDC	Misure - size dimensioni in mm - size mm 99X82X30
	STRIP-DRIVER24V-50W 8031440364744	Output 24V 2,2A 52W Input 85 ~ 264VAC 120 ~ 373VDC	Misure - size dimensioni in mm - size mm 99X82X30
	STRIP-DRIVER24V-75W 8031414870950	Output 24V 3,2A 76W Input 85 ~ 264VAC 120 ~ 373VDC	Misure - size dimensioni in mm - size mm 99X97X30
	STRIP-DRIVER24V-100W 8031440364751	Output 24V 4.5A 108W Input 85 ~ 264VAC 120 ~ 373VDC	Misure - size dimensioni in mm - size mm 129X97X30
	STRIP-DRIVER24V-150W 8031414870967	Output 24V 6.5A 156W Input 85 ~ 132VAC / 170 ~ 264VAC by switch 240 ~ 370VDC(switch on 230VAC)	Misure - size dimensioni in mm - size mm 159X97X30
	STRIP-DRIVER24V-200W 8031440364737	Output 24V 8,4A 201W Input 85 ~ 264VAC 124 ~ 370VDC	Misure - size dimensioni in mm - size mm 215X115X30
	STRIP-DRIVER24V-320W 8031414864959	Output 24V 13,4A 321W Input 88 ~ 264VAC 124 ~ 370VDC	Misure - size dimensioni in mm - size mm 215X115X30

ALIMENTATORI

Alimentatori tensione costante UHP 24V - Costant voltage power supply UHP 24V

MEAN WELL



I-DRIVER-UHP-350-24
8031414879618

Output 24V 14.6A 350W
Input 90 ~ 264VAC 127 ~ 370VDC
senza ventola - without fan

Misure - size
dimensioni in mm - size mm
220X62X31



I-DRIVER-UHP-500-24
8031414879625

Output 24V 20.9A 501W
Input 90 ~ 264VAC 127 ~ 370VDC
senza ventola - without fan

Misure - size
dimensioni in mm - size mm
232X81X31

ALIMENTATORI

Alimentatori tensione costante RSP 36V - Costant voltage power supply RSP 36V



STRIP-DRIVER36V-200W
8031414870974

Output 36V 5.56A 200W
Input 88 ~ 264VAC 124 ~ 370VDC

Misure - size
dimensioni in mm - size mm
215X115X30



STRIP-DRIVER36V-320W
8031414864829

Output 36V 8.9A 320W
Input 88 ~ 264VAC 124 ~ 370VDC

Misure - size
dimensioni in mm - size mm
215X115X30

ALIMENTATORI

Alimentatori tensione costante RSP 48V - Costant voltage power supply RSP 48V



STRIP-DRIVER48V-75W
8031414881536

Output 48V 1.6A 76,8W
Input 88 ~ 264VAC 124 ~ 370VDC

Misure - size
dimensioni in mm - size mm
99X97X30



STRIP-DRIVER48V-150W
8031414881529

Output 48V 3.3A 158,4W
Input 85 ~ 132VAC 240 ~ 370VDC

Misure - size
dimensioni in mm - size mm
159X97X30



STRIP-DRIVER48V-200W
8031414878307

Output 48V 4.2A 201W
Input 88 ~ 264VAC 124 ~ 370VDC

Misure - size
dimensioni in mm - size mm
215X115X30



STRIP-DRIVER48V-320W
8031414878314

Output 48V 6.7A 321W
Input 88 ~ 264VAC 124 ~ 370VDC

Misure - size
dimensioni in mm - size mm
215X115X30

DRIVER

Driver LPHC LPH e LCM

MEAN WELL



I-DRIVER/18W-24V
8031414875351

LPH Output 24V 0.75A 18W IP67
Input 180 ~ 264VAC 254 ~ 370VDC

IP67

Misure - size
dimensioni in mm - size mm
140X30X22



I-DRIVER/18W
8031439571269

LPHC Output 6~48V 350mA 16,8W IP67
Input 180 ~ 264VAC

IP67

Misure - size
dimensioni in mm - size mm
140X30X22



I-DRIVER-DIMM-LCM40
8031439591267

LCM dimmerabile 42W Output DC 2~100V
350mA; 2~80V 500mA; 2~67V 600mA; 2~57V
700mA; 2~45V 900mA; 2~40V 1050mA
Input 180 ~ 295VAC 254~417VDC

Dimming

Misure - size
dimensioni in mm - size mm
123,5X81,5X23



I-DRIVER-DIMM-LCM60
8031439561260

LCM dimmerabile 60W Output DC 2~90V 500mA;
2~90V 600mA; 2~86V 700mA; 2~67V 900mA;
2~57V 1050mA; 2~42V 1400mA
Input 180 ~ 295VAC 254~417VDC

Dimming

Misure - size
dimensioni in mm - size mm
123,5X81,5X23

DRIVER

Driver HLG IP67 12-24V

MEAN WELL



I-DRIVER-HLG-120-12
8031440360272

Output 12V 10A 120W IP67
Input 90 ~ 305VAC 127 ~ 431VDC

IP67

Misure - size
dimensioni in mm - size mm
220X68X38,8



I-DRIVER-HLG-120-24
8031440360241

Output 24V 5A 120W IP67
Input 90 ~ 305VAC 127 ~ 431VDC

IP67

Misure - size
dimensioni in mm - size mm
220X68X38,8



I-DRIVER-HLG-320-12
8031440360258

Output 12V 22A 264W IP67
Input 90 ~ 305VAC 127 ~ 431VDC

IP67

Misure - size
dimensioni in mm - size mm
252X90X43,8



I-DRIVER-HLG-320-24
8031440360227

Output 24V 13.34A 320W IP67
Input 90 ~ 305VAC 127 ~ 431VDC

IP67

Misure - size
dimensioni in mm - size mm
252X90X43,8

DRIVER

Driver ELG 24V IP67 dimmerabili e LPV 24V IP67 - *Dimmable driver ELG 24V IP67 and LPV 24V IP67*

MEAN WELL



I-DRIVER-ELG-100-24
8031414876914

ELG Dimmerabile
Output 24V 4A 100W IP67
Input 100 ~ 305VAC 142 ~ 431VDC
continue,320VAC for 24Hrs; 360VAC for 1Hr

IP67

Misure - size
dimensioni in mm - size mm
199X63X35,5



I-DRIVER-ELG-100-24DA
8031414876921

DALI

ELG Dimmerabile DALI
Output 24V 4A 100W IP67
Input 100 ~ 305VAC 142 ~ 431VDC
continue,320VAC for 24Hrs; 360VAC for 1Hr

IP67

Misure - size
dimensioni in mm - size mm
199X63X35,5



I-DRIVER-ELG-150-24
8031414876891

ELG Dimmerabile
Output 24V 6.25A 150W IP67
Input 100 ~ 305VAC 142 ~ 431VDC

IP67

Misure - size
dimensioni in mm - size mm
219X63X35,5



I-DRIVER-ELG-150-24DA
8031414876907

DALI

ELG Dimmerabile DALI
Output 24V 6.25A 150W IP67
Input 100 ~ 305VAC 142 ~ 431VDC

IP67

Misure - size
dimensioni in mm - size mm
219X63X35,5



I-DRIVER-ELG-240-24
8031414876877

ELG Dimmerabile
Output 24V 10A 240W IP67
Input 100 ~ 305VAC 142 ~ 431VDC

IP67

Misure - size
dimensioni in mm - size mm
244X71X37,5



I-DRIVER-ELG-240-24DA
8031414876884

DALI

ELG Dimmerabile DALI
Output 24V 10A 240W IP67
Input 100 ~ 305VAC 142 ~ 431VDC

IP67

Misure - size
dimensioni in mm - size mm
244X71X37,5



I-DRIVER-LPV-60-24
8031414876839

LPV Output 24V 2.5A 60W IP67
Input 90 ~ 264VAC 127 ~ 370VDC

IP67

Misure - size
dimensioni in mm - size mm
162,5X42,5X32



I-DRIVER-LPV-100-24
8031414876853

LPV Output 24V 4.2A 100W IP67
Input 90 ~ 264VAC 127 ~ 370VDC

IP67

Misure - size
dimensioni in mm - size mm
190X52X37



I-DRIVER-LPV-150-24
8031414876860

LPV Output 24V 6.3A 150W IP67
Input 180 ~ 305VAC 254 ~ 431VDC

IP67

Misure - size
dimensioni in mm - size mm
191X63X37,5

DRIVER

Driver XLG 24V IP67

MEAN WELL



I-DRIVER-XLG-75-24
8031414873708

Output 24V 3.1A 75W IP67
Input 100 ~ 305VAC 142 ~ 431VDC

IP67

Misure - size
dimensioni in mm - size mm
140X63X32



I-DRIVER-XLG-100-24
8031414879595

Output 24V 4A 100W IP67
Input 100 ~ 305VAC 142 ~ 431VDC

IP67

Misure - size
dimensioni in mm - size mm
140X63X32



I-DRIVER-XLG-150-24
8031414879601

Output 24V 6.25A 150W IP67
Input 100 ~ 305VAC 142 ~ 431VDC

IP67

Misure - size
dimensioni in mm - size mm
180X63X35,5



I-DRIVER-XLG-200-24
8031414879588

Output 24V 8.3A 200W IP67
Input 100 ~ 305VAC 142 ~ 431VDC

IP67

Misure - size
dimensioni in mm - size mm
199X63X35,5

ADATTATORI

Adattatore tensione costante - *Costant voltage power supply*



STRIP-ADAT-12W
8031433141208

12V 12W - SPINA CEE 7/16 IP20 OUTPUT 12V 1A INPUT 110-240V 0,5A
MISURE - size 38X67X42mm - CAVO 1500mm - IP20 - CLASSE 2



STRIP-ADAT-24W
8031433251204

12V 24W - SPINA CEE 7/16 IP20 - OUTPUT 12V 2A INPUT 110-240V 0,6A
MISURE - size 38X80X50 mm - CAVO 1500mm - IP20 - CLASSE 2



STRIP-ADAT-36W
8031436601235

LED 12V 36W - SPINA CEE 7/16 IP20 - OUTPUT 12V 3A INPUT 110-240V 0,6A
MISURE - size 35X100X50 mm - CAVO 1500mm - IP20 - CLASSE 2

AMPLIFICATORE

Amplificatore segnale - *Signal amplifier*



STRIP-AMPLIFIER-5C
8031414871858

5 Canali Dc 12-24V
Output Current < 3A/Ch (5Channel)
Output Power:12V <180W; 24V<360W

Misure - size
dimensioni in mm - size mm
81X64X25

REMOTE CONTROL



RF-WALLPAD-1CH
8031414876426

Wallpad RF 2,4G controllo dimmer-varialuce 4 zone 1 canale 2xAAA non incluse
RF 2.4G wallpad dimming light 4 zone 1 channel 2xAAA not included

Dimming

Misure - size
dimensioni in mm - size mm
86X86X36,5



RF-WALLPAD-2CH
8031414876433

Wallpad RF 2,4G controllo CCT bianco dinamico 4 zone 2 canali 2xAAA non incluse
RF 2.4G wallpad cct adjustable white 4 zone 2 channels 2xAAA not included

luce calda warm white | luce naturale natural white | luce fredda cool white

Misure - size
dimensioni in mm - size mm
86X86X36,5



RF-WALLPAD-5CH
8031414876440

Wallpad RF 2,4G controllo RGB/RGBW/RGB+CCT 4 zone 5 canali 2xAAA non incluse
RF 2.4G wallpad RGB/RGBW/RGB+CCT 4 zone 5 channels 2xAAA not included

RGB

luce calda warm white | luce naturale natural white | luce fredda cool white

Misure - size
dimensioni in mm - size mm
86X86X36,5



RF-DMXPAD-1CH
8031414876457

Wallpad RF 2,4G controllo dimmer-varialuce 4 zone 1 canale 230V collegabile con protocollo DMX 512 -
RF 2.4G wallpad dimming light 4 zone 1 channel 230V linkable with DMX512 protocol

Dimming

Misure - size
dimensioni in mm - size mm
120X80X37

formato universale per cassetta 503
universal size for 503 box



RF-DMXPAD-2CH
8031414876464

Wallpad RF 2,4G controllo CCT bianco dinamico 4 zone 2 canali 230V collegabile con protocollo DMX 512
RF 2.4G wallpad cct adjustable white 4 zone 2 channels 230V collegabile con protocollo DMX 512

luce calda warm white | luce naturale natural white | luce fredda cool white

Misure - size
dimensioni in mm - size mm
120X80X37

formato universale per cassetta 503
universal size for 503 box



RF-DMXPAD-5CH
8031414876471

Wallpad RF 2,4G controllo RGB/RGBW/RGB+CCT 4 zone 5 canali 230V collegabile con protocollo DMX 512
RF 2.4G wallpad RGB/RGBW/RGB+CCT 4 zone 5 channels 230V collegabile con protocollo DMX 512

RGB

luce calda warm white | luce naturale natural white | luce fredda cool white

Misure - size
dimensioni in mm - size mm
120X80X37

formato universale per cassetta 503
universal size for 503 box



RF-COM-1CH
8031414876402

Radiocomando RF 2,4G controllo dimmer-varialuce 4 zone 1 canale 2xAAA non incluse
RF 2.4G remote control dimming light 4 zone 1 channel 2xAAA not included

Dimming



RF-COM-2CH
8031414876396

Radiocomando RF 2,4G controllo CCT bianco dinamico 4 zone 2 canali 2xAAA non incluse
RF 2.4G remote control cct adjustable white 4 zone 2 channels 2xAAA not included

luce calda warm white | luce naturale natural white | luce fredda cool white



RF-COM-5CH
8031414876419

Radiocomando RF 2,4G controllo RGB/RGBW/RGB+CCT 4 zone 5 canali 2xAAA non incluse
RF 2.4G remote control RGB/RGBW/RGB+CCT 4 zone 5 channels 2xAAA not included

RGB

luce calda warm white | luce naturale natural white | luce fredda cool white

DIMMER

AcTEC



I-DIMMER-D1-10
8031414877959

D1-10 dimmer
Dimming range 1%-100% 1-10V 40mA

Misure - size
dimensioni in mm - size mm
22,5X22,5X48,6



STRIP-CONTROL-WIFI
8031440359474

Kit controller + radiocomando 2.4G per prodotti LED RGBW DC 12/24V 6Ax3ch Max Distanza 20m
Controller + 2.4G remote control kit for LED RGBW items DC 12/24V 6Ax3ch Max distance 20m

Misure - size
dimensioni in mm - size mm
81X84X32



STRIP-SOUND
8031434531213

Ricevitore musicale + telecomando RGB 12V PER STRIP LED
Musical control receiver RGB 12V for strip led + remote control

Misure - size
dimensioni in mm - size mm
50X70X20



RF-RICEVITORE-2CH
8031414876488

Ricevitore RF 2,4G 2 canali per
WALLPAD/RADIOCOMANDO/WALLPAD DMX
utilizzabile per SINGOLO COLORE/CCT
Input: 10.5A 12-24V Output: 2CH;5A/CH - 2x(60-120)W
RF 2.4G receiver box 2 channels for
WALLPAD/RADIOCOMANDO/WALLPAD DMX
usable for SINGLE COLOR /CCT
Input: 10.5A 12-24V Output: 2CH;5A/CH - 2x(60-120)W

Misure - size
dimensioni in mm - size mm
97X33X18



RF-RICEVITORE-5CH
8031414876495

Ricevitore RF 2,4G 5 canali per
WALLPAD/RADIOCOMANDO/WALLPAD DMX
utilizzabile per SINGOLO COLORE/CCT/RGB/RGBW/RGB+CCT
Input: 15.5A 12-24V Output: 5CH;3A/CH - 5x(36-72)W
RF 2.4G receiver box 5 channels for
WALLPAD/RADIOCOMANDO/WALLPAD DMX
usable for SINGLE COLOR /CCT/RGB/RGBW/RGB+CCT
Input: 15.5A 12-24V Output: 5CH;3A/CH - 5x(36-72)W

Misure - size
dimensioni in mm - size mm
114X38X20



RF-RICEVITORE-5CH-PRO
8031414882724

Ricevitore RF 2,4G 5 canali per WALLPAD/RADIOCOMANDO/WALLPAD DMX
utilizzabile per SINGOLO COLORE/CCT/RGB/RGBW/RGB+CCT
Input: 30.5A 12-48V
Output: 5CH;6A/CH 12/24V 5x(72-144)W
5CH;4A/CH 36/48V - 5x(144-192)W
RF 2.4G receiver box 5 channels for
WALLPAD/RADIOCOMANDO/WALLPAD DMX
usable for SINGLE COLOR /CCT/RGB/RGBW/RGB+CCT
Input: 30.5A 12-48V
Output: 5CH;6A/CH 12/24V 5x(72-144)W
5CH;4A/CH 36/48V - 5x(144-192)W

Misure - size
dimensioni in mm - size mm
179X56X30



RF-RICEVITORE-4CH-IP67
8031414882717

IP67

Ricevitore RF 2,4G 4 canali per
WALLPAD/RADIOCOMANDO/WALLPAD DMX
utilizzabile per SINGOLO COLORE/CCT/RGB/RGBW
Input: 20.5A 12-36V Output: 4CH;5A/CH - 4x(60-180)W
RF 2.4G receiver box 4 channels for
WALLPAD/RADIOCOMANDO/WALLPAD DMX
usable for SINGLE COLOR /CCT/RGB/RGBW/RGB+CCT
Input: 20.5A 12-36V Output: 4CH;5A/CH - 4x(60-180)W

Misure - size
dimensioni in mm - size mm
176X78X38



SMART INTEC Wi-Fi

RF-WIFI-CONTROL-5CH
8031414878710

Powered by tuya Intelligence Inside

Ricevitore Wi-Fi + RF 2,4G 5 canali per
WALLPAD/RADIOCOMANDO/WALLPAD DMX
utilizzabile per SINGOLO COLORE/CCT/RGB/RGBW/RGB+CCT
Input: 15.5A 12-24V Output: 5CH;3A/CH - 5x(36-72)W
Wi-Fi + RF 2.4G receiver box 5 channels for
WALLPAD/RADIOCOMANDO/WALLPAD DMX
usable for SINGLE COLOR /CCT/RGB/RGBW/RGB+CCT
Input: 15.5A 12-24V Output: 5CH;3A/CH - 5x(36-72)W

Misure - size
dimensioni in mm - size mm
114X38X20



SMART INTEC Bluetooth Sig mesh

RF-BT-CONTROL-5CH
8031414878826

Powered by tuya Intelligence Inside

Ricevitore Bluetooth + RF 2,4G 5 canali per
WALLPAD/RADIOCOMANDO/WALLPAD DMX
utilizzabile per SINGOLO COLORE/CCT/RGB/RGBW/RGB+CCT
Input: 15.5A 12-24V Output: 5CH;3A/CH - 5x(36-72)W
Bluetooth + RF 2.4G receiver box 5 channels for
WALLPAD/RADIOCOMANDO/WALLPAD DMX
usable for SINGLE COLOR /CCT/RGB/RGBW/RGB+CCT
Input: 15.5A 12-24V Output: 5CH;3A/CH - 5x(36-72)W

Misure - size
dimensioni in mm - size mm
114X38X20



RF-AMPLIFICATORE-5CH
8031414882700

Amplificatore 5 canali
Input: 25.5A 12-24VDC
Output: 5CH;5A/CH 12/24V - 5x(60-120)W
5 Channel amplifier Input: 25.5A 12-24VDC
Output: 5CH;5A/CH 12/24V - 5x(60-120)W

Misure - size
dimensioni in mm - size mm
107X75X24,5

schema elettrico
wiring diagram

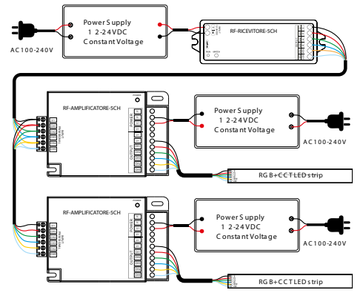



RF-AMPLIFICATORE-2CH
8031414882694

Amplificatore 2 canali
Input: 16.5A 12-36VDC Output: 2CH;8A/CH
12/36V - 2x(96-288)W
2 Channel amplifier 16.5A 12-36VDC Output:
2CH;8A/CH 12/36V - 2x(96-288)W

Misure - size
dimensioni in mm - size mm
175X45X27

connesione in parallelo
parallel connection

connesione in serie
series connection



RF-RIPETITORE
8031414882731

Ripetitore di segnale RF 2,4G
AC100-240V DC12-24V
RF 2.4G signal Repeater
AC100-240V DC12-24V

Misure - size
dimensioni in mm - size mm
52X52X26

esempio applicazione
application example

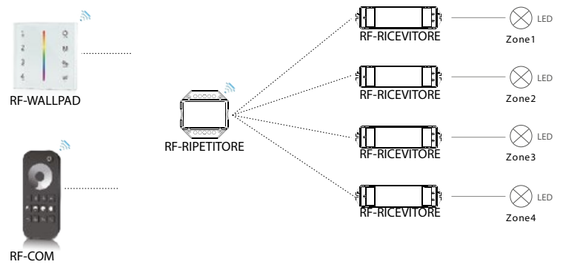



I-CLAY-SCADER
8031414865031

SCATOLA DI DERIVAZIONE ELETTRICA CLAY IN PORCELLANA BIANCA
ø 80x H 45 mm
white porcelain external junction box CLAY



I-CLAY-INTERRUTTORE
8031414865048

INTERRUTTORE ROTATIVO CLAY IN PORCELLANA BIANCA 10A AC230V 50Hz
ø 65x H 60 mm
white porcelain rotating switch CLAY 10A AC230V 50Hz



I-CLAY-PRESA
8031414865055

PRESA ELETTRICA CLAY POLIVALENTE IN PORCELLANA BIANCA 10/16A
AC230V 50Hz ø 65x H 37 mm
white porcelain universal socket CLAY 10/16A AC230V 50Hz



I-CLAY-PRESA-F
8031414865062

PRESA ELETTRICA SCHUKO CLAY IN PORCELLANA BIANCA
AC230V 50Hz ø 65x H 50 mm



I-CLAY-E27
8031414871117

PORTALAMPADA CLAY IN PORCELLANA BIANCA E27
AC230V 50Hz - H 60 ø 45 mm
white porcelaine E27 lamp-holder AC230V 50Hz



I-CLAY-E14
8031414870929

PORTALAMPADA CLAY IN PORCELLANA BIANCA E14
AC230V 50Hz - H 60 ø 35 mm
white porcelaine E14 lamp-holder AC230V 50Hz



I-CLAY-BASE
8031414870936

ROSONE IN PORCELLANA BIANCA ø105 - H 30 mm
white porcelain canopy ø 105 - H 30 mm



I-CLAY-ISOLATORI
8031414865079

KIT 4PZ ISOLATORI CLAY IN PORCELLANA BIANCA
ø 18x H 20 mm
white porcelain pulleys CLAY set 4pcs



I-CLAY-CAVO-BCO
8031414865086

CAVO ELETTRICO CLAY TRECCIATO CON RIVESTIMENTO TESSILE
IN BIANCO 5m 3X0,75
twisted white fabric wire CLAY 5m 3X0,75

I-CLAY-CAVO-2P-BCO
8031414865277

CAVO ELETTRICO CLAY TRECCIATO CON RIVESTIMENTO TESSILE
BIANCO 5m 2X0,75 twisted white fabric wire CLAY 5m 2X0,75

I-CLAY-CAVO-R25 BCO
8031414871162

CAVO ELETTRICO CLAY TRECCIATO CON RIVESTIMENTO TESSILE
IN BIANCO 25m 2X0,75 twisted white fabric wire CLAY 25m 2X0,75



I-CLAY-CAVO-ORO
8031414865093

CAVO ELETTRICO CLAY TRECCIATO CON RIVESTIMENTO TESSILE
IN ORO 5m 3X0,75 twisted white fabric wire CLAY 5m 3X0,75

I-CLAY-CAVO-2P-ORO
8031414865284

CAVO ELETTRICO CLAY TRECCIATO CON RIVESTIMENTO TESSILE ORO
5m 2X0,75 twisted white fabric wire CLAY 5m 2X0,75

I-CLAY-CAVO-R25 ORO
8031414871131

CAVO ELETTRICO CLAY TRECCIATO CON RIVESTIMENTO TESSILE
IN ORO 25m 2X0,75 twisted white fabric wire CLAY 25m 2X0,75



I-CLAY-CAVO-R25 MAR
8031414871148

CAVO ELETTRICO CLAY TRECCIATO CON RIVESTIMENTO TESSILE
IN BIANCO 25m 2X0,75 twisted white fabric wire CLAY 25m 2X0,75



I-CLAY-CAVO3X1,5 BCO
8031414877980

CAVO ELETTRICO CLAY TRECCIATO CON RIVESTIMENTO TESSILE
IN BIANCO 25m 3X1,5mm
twisted white fabric wire CLAY 25m 3X1,5mm



I-CLAY-CAVO3X1,5 MAR
8031414878000

CAVO ELETTRICO CLAY TRECCIATO CON RIVESTIMENTO TESSILE
IN BIANCO 25m 3X1,5mm
twisted white fabric wire CLAY 25m 3X1,5mm



I-CLAY-CAVO3X1,5 ORO
8031414877997

CAVO ELETTRICO CLAY TRECCIATO CON RIVESTIMENTO TESSILE
IN ORO 25m 3X1,5mm
twisted white fabric wire CLAY 25m 3X1,5mm



I-PORTALAMPADE-E14-L
8031440354592

Portalampada E14 con copertura liscia in PET



I-PORTALAMPADE-E14-S
8031440354578

Portalampada E14 in PET con copertura filettata e ghiera



I-PORTALAMPADE-E14-T
8031440354585

Portalampada E14 in PET con copertura mezza filettata con ghiera



I-PORTALAMPADE-E27-L
8031440354554

Portalampada E27 con copertura liscia in PET



I-PORTALAMPADE-E27-P
8031440354561

Portalampada E27 in PBT



I-PORTALAMPADE-E27-S
8031440354530

Portalampada E27 in PET con copertura filettata e ghiera



I-PORTALAMPADE-E27-T
8031440354547

Portalampada E27 in PET con copertura mezza filettata con ghiera



I-PORTALAMPADE-GU10
8031435751221

Portalampada GU10 in PBT con cavo di 12 cm



I-PORTALAMPADE-MR16
8031439761264

Portalampada MR16 in PBT con cavo di 10 cm



I-PORTALAMPADE-T8
8031439851262

Portalampada T8 in PBT fissaggio a clip



I-PORTALAMPADE-R7S
8031414861491

Portalampada R7S 118 mm in PBT incluso filo da 15 cm



I-PORTALAMPADE-G9
8031414862962

Portalampada G9 in PBT con cavo di 10 cm



INC-MATRIX-KIT
8031436551233

Kit molle e anello per faretti incasso GU10.



CABLAGGIO
8031414865499

CABL. TRIP. CAVO TONDO BCO CM250 H05VV-F 3X0,75 - SPINA ITALIA 10A, 250V



ADATTATORE-E14-E27
8031439351267

Adattatore da E14 a E27 in PET
Lamp holder adapter from E14 to E27 in PET



ADATTATORE-E27-E14
8031439391263

Adattatore da E27 a E14 in PET
Lamp holder adapter from E27 to E14 in PET



ADATTATORE-E27-2E27
80314439371265

Adattatore da E27 a 2 E27 in PET
Lamp holder adapter from E27 to E27 in PET



ADATTATORE-E27-GU10
8031436171233

Adattatore da E27 a GU10 in PET
Lamp holder adapter from E27 to GU10 in PET



ADATTATORE-E14-GU10
8031439361266

Adattatore da E14 a GU10 in PET
Lamp holder adapter from E14 to GU10 in PET



ADATTATORE-GU10-E14
8031439431266

Adattatore da GU10 a E14 in PET
Lamp holder adapter from GU10 to E14 in PET



ADATTATORE-GU10-E27
8031439421267

Adattatore da GU10 a E27 in PET
Lamp holder adapter from GU10 to E27 in PET



ADATTATORE-G9-E27
8031439411268

Adattatore da G9 a E27 in PET
Lamp holder adapter from G9 to E27 in PET

ADATTATORI / LAMP HOLDER ADAPTERS



ADATTATORE-G9-E14
8031439401269

Adattatore da G9 a E14 in PET
Lamp holder adapter from G9 to E14 in PET



ADATTATORE-E27-E27
8031439451264

Adattatore da E27 a E27 in PET con flessibile 20 cm in metallo
Lamp holder adapter from E27 to E27 in PET with 20 cm metal flexible tube



ADATTATORE-EUC-UKG
8031414879809

Adattatore presa (EU) tipo C a presa (UK) tipo G
Adaptor (EU) C to (UK) G



ADATTATORE-EUF-UKG
8031414879816

Adattatore (EU) F a (UK) G
Adaptor (EU) F to (UK) G

ACCESSORI



I-POWER-SC-BP2-USB2
8031414864911

ADATTATORE MULTIPRESA ON/OFF 1XSCHUKO+2 BIPASSO+2USB2.1A 230V 10/16A CAVO 1,5M SPINA H05VV-F



I-POWER-SC2-BP4
8031414864881

ADATTATORE MULTIPRESA INTERRUTTORE ON/OFF 2XSCHUKO+4 BIPASSO 230V 10/16A CAVO 1,5M SPINA H05VV-F



I-POWER-SC3
8031414864843

ADATTATORE MULTIPRESA CON INTERRUTTORE ON/OFF 3XSCHUKO 230V 10/16A CAVO 1,5M SPINA H05VV-F



I-POWER-SC3-BP6
8031414864904

ADATTATORE MULTIPRESA INTERRUTTORE ON/OFF 3XSCHUKO+6X BIPASSO 230V 10/16A CAVO 1,5M SPINA H05VV-F



I-POWER-SC4
8031414864850

ADATTATORE MULTIPRESA CON INTERRUTTORE ON/OFF 4XSCHUKO 230V 10/16A CAVO 1,5M SPINA H05VV-F



I-POWER-SC5
8031414864867

ADATTATORE MULTIPRESA CON INTERRUTTORE ON/OFF 5XSCHUKO 230V 10/16A CAVO 1,5M SPINA H05VV-F



I-POWER-SC6
8031414864874

ADATTATORE MULTIPRESA CON INTERRUTTORE ON/OFF 6XSCHUKO 230V 10/16A CAVO 1,5M SPINA H05VV-F

SMART INTEC Wi-Fi

iNTEC LIGHT

DOWNLOAD ON Download on the App Store · GET IT ON Google Play · Powered by tuya Intelligence Inside

Good solution for your Smart life!

SMART HUB

SMART-GATEWAY-BT
8031414878970

Interfaccia di collegamento dispositivi bluetooth con rete wifi

Device connection interface bluetooth with wifi network



SMART-IR
8031414878703



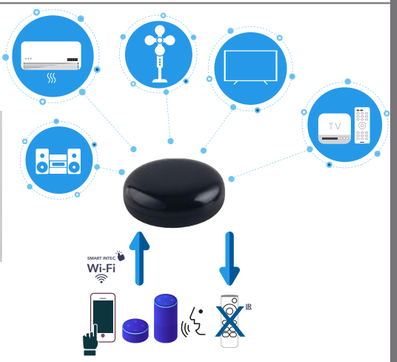

SMART PLUG



SMART-POWER-SC4USB3
8031414879014

ADATTATORE MULTIPRESA WIFI 4 SCHUKO 3 USB 1000-2400W 10A INPUT 100-240V WIFI 2.4GHZ



SMART-PRESA
8031414878987

ADATTATORE PRESA WIFI 230V 50HZ 16A FREQUENZA 2.4GHz

COMMUTATORI SMART



SMART-SWITCH-2
8031414879045

CONTROLLER WIFI 2.4GHz PER ACCENSIONE E TIMER INTERRUTTORI 2 VIE 230V MAX 10A



SMART-SWITCH-1
8031414879038

CONTROLLER WIFI 2.4GHz PER ACCENSIONE E TIMER INTERRUTTORI 1 VIA 230V MAX 10A



SMART-START
8031414879021

CONTROLLER WIFI 2.4GHz PER ACCENSIONE E TIMER PRODOTTI 230V MAX 2200W/10A

SMART SENSOR



SMART-SENSOR
8031414879007

SENSORE INFRAROSSI WIFI 2.4GHz

SMART-PORTER
8031414878994

SENSORE PORTE E FINESTRE WIFI 2.4GHz ALIMENTATO A BATTERIE AAA1,5V2

iNTEC® LIGHT

Divisione F.A.N. EUROPE LIGHTING s.r.l. a socio unico

faneurope®

Agglomerato A.S.I Località Bosco Fangone 80035 Nola (Napoli)
Tel. +39 0813151017 - Tel. +39 0818210771 - Fax +39 081 4629040
info@faneurope.it

www.faneurope.it

DOWNLOAD CATALOG

SMART INTEC

SCARICA L'APP SMART INTEC SU:
DOWNLOAD APP SMART INTEC ON:

Download on the App Store

GET IT ON Google Play

Powered by tuya Intelligence Inside

L'azienda si riserva il diritto di effettuare modifiche ai prodotti presenti in questo catalogo senza preavviso alcuno.
The company reserves the right to make changes to the products in this catalog without prior notice.